

9. CHARACTERISTICS OF VTOL-STOL AIRCRAFT

The interest in a wide variety of aircraft having VTOL-STOL capability has created the need for establishing preliminary-design methods for the prediction of the aerodynamic characteristics of such vehicles.

The terms VTOL, STOL, and V/STOL appear many times in the literature. VTOL means "vertical take-off and landing." STOL means "short take-off and landing," and vehicles of this classification do not have vertical take-off and landing capability. V/STOL means the capability to perform both vertical and short take-offs and landings. The many ways of achieving VTOL-STOL capability are exhibited in the proposed and existing vehicles of this family. There are four basic VTOL-STOL principles involved for accomplishing the conversion from hovering to cruise flight; namely, aircraft tilting, thrust tilting, thrust deflection, and dual-propulsion. These four conversion principles are coupled with four different propulsion methods; namely, rotor, propeller, fan, and jet, to give the family of basic V/STOL types. In the broad sense the material presented in this section does not include all V/STOL concepts. Specifically, the methods presented in Section 9 are applicable to predicting the forces and moments on free propellers (Section 9.1), power-on lift and drag forces of propeller-wing combinations (Section 9.2), and the forces and moments on isolated ducted propellers as functions of power and angle of attack (Section 9.3). No discussion or methodology is presented for rotor-type V/STOL aircraft. In addition to the material presented in this section, there are additional methods pertaining to STOL aircraft given in Section 6. Specifically, these methods pertain to jet-flap configurations; i.e., both internally-blown flaps (IBF) and externally-blown flaps (EBF).

Because of the unusual low-speed configurations and the effects of power and high angles of attack in the low-speed flight regime, which are typical of VTOL-STOL vehicles, conventional methods of predicting aerodynamic characteristics at low speeds are not applicable in most cases. In cruise flight, VTOL-STOL vehicles can usually be analyzed by conventional methods. Therefore, the primary problem is the prediction of characteristics that exist as a result of high-velocity slipstreams, high angles of attack, and geometry variations in the hover and transition flight regimes.

Because of the scope of VTOL-STOL aerodynamics and the scarcity of verified theoretical methods and design charts, a literature summary is presented as Table 9-A, accompanied by a subject index on page 9-34, a "key" to the summary table on page 9-35, and a bibliography on pages 9-3 through 9-33.

V/STOL aircraft are characterized by the following four basic and unique characteristics:

1. High power requirements in hover and transition
2. High-velocity slipstreams in hover and transition
3. Inherent deficiencies in aerodynamic stability and control in hover and low-speed flight
4. Special provisions for performing the conversion from the hovering to the cruise configuration

The high power required in hovering and transition is not of primary concern to the stability and control engineer and is not considered in the Datcom. However, it should be noted that the engine-operation problems are extremely significant in the design of a V/STOL vehicle. The high power required in hovering and transition results in both higher fuel consumption and greater noise.

The magnitude of these increases depends on the type of propulsion system used. Both fuel consumption and noise level progressively increase from the rotor to the propeller, the fan, and the jet.

The high-velocity slipstream required in hovering and transition flight introduces problems due to surface erosion, recirculation of dust and debris, ingestion of foreign objects, and slipstream recirculation, which can result in adverse aerodynamic effects and ingestion of hot gases into the engine, resulting in a serious reduction in engine thrust. Only the aerodynamic effects of the slipstream are considered in this section. Slipstream recirculation can affect the pressure on the airframe, which can cause significant changes in the vertical lift. When a single high-velocity slipstream exhausts in still air, suction is generated on the surrounding surface because of the entrainment into the high-velocity slipstream. This "suckdown" effect is a pressure reduction and reduces the vertical lift. This lift loss is evident during hovering near the ground for a configuration with a single vertical slipstream or a close cluster of vertical slipstreams. On the other hand, when several vertical slipstreams are dispersed over the planform, the high-velocity slipstreams tend to meet on the ground between the exits, and the consequent upflow can produce positive-pressure regions between the exits to counterbalance the "suckdown" generated by the entrainment. Unfortunately, this upward flow of air is not very steady or symmetrical and can result in random upsetting motions. In addition, for configurations with a tail behind the slipstreams, additional interference effects on longitudinal trim and stability can occur during transition flight. (Strong downwash and sidewash fields can develop in the region aft of the exits as a result of the rearward deflection and distortion of the slipstreams together with the entrainment of the free-stream flow.) References pertaining to the aerodynamic effects of high-velocity slipstreams are listed under one or more of the following specialized categories in table 9-A:

5.5 Ground Effects

5.10 Jet-Wake or Propeller-Slipstream Effects

5.11 Jet-Induced Effects

An important aspect of V/STOL hovering and low-speed flight is the inherently low level of aerodynamic stability and control. Aerodynamic control and static and dynamic stability vary with dynamic pressure in the free stream, and they all drop off rapidly as the flight speed is decreased. In hovering there is no aerodynamic control effectiveness (unless the control surface is in a high-velocity slipstream), and it is usually necessary to provide an additional control system for hovering and low-speed flight. In hovering flight the static stability is neutral (no stability of attitude) for all V/STOL types. The dynamic stability in hover is about neutral for jet-V/STOL types, but other types are usually dynamically unstable in the form of unstable pitching and rolling oscillations. Almost any system that will provide control for the pilot under these conditions can also be used to augment stability. However, the way in which this should be accomplished has not been clearly settled for any V/STOL type. The cost, complexity, reliability, and maintainability of any augmentation system must be weighed against the improvements in handling qualities and the potential reductions in control requirements. The problem immediately becomes more complex, since there is still a great deal of controversy regarding control-system requirements and handling-quality criteria. References pertaining to the aerodynamic stability and control deficiencies in hovering and low-speed flight may be found

under one or more of the following specialized categories in table 9-A:

- 5.1 General Static Stability and Control
- 5.2 Dynamic Stability
- 5.3 Handling Criteria
- 5.4 Handling Qualities
- 5.7 Stabilization
- 5.8 Zero or Low-Airspeed Control and/or Control Systems

Although wind-tunnel tests cover a wide variety of V/STOL configurations, they are often of questionable accuracy because of wall interference effects and/or data-accuracy limitations at the low tunnel velocities required to simulate low-speed flight. Large flow-deflection angles are required for flight at very low speeds, and when these conditions are duplicated by a powered model in a wind tunnel, the presence of the tunnel walls have a first-order effect on tunnel flow conditions. Most existing low-speed wind tunnels are inadequate for the simulation of powered-lift low-speed flight because of their size limitations. The test section must be large compared to model dimensions to minimize the adverse effects of the wind-tunnel walls on the flow field. Simply testing models of smaller scale in an effort to avoid wall-interference effects often has not proved satisfactory, because of the significant errors in test data associated with low Reynolds number and the problems encountered in the design and manufacture of a powered model to a small scale. There appears to be a limit, which is a function of the tunnel test-section size and shape, model size, flow deflection angle, and model configuration, at which the tunnel-wall constraint causes a complete flow breakdown. The effects of all these variables on the accuracy of the wind-tunnel data are quite complex and some are not yet clearly understood. However, one fact has become very clear, and that is that most existing wind tunnels are simply too small for simulation of V/STOL flight.* References pertaining to wind-tunnel test techniques are listed under category 5.12 in table 9-A.

REFERENCES

1. Abbott, W. A.: Studies of Flow Fields Created by Vertical and Inclined Jets When Stationary or Moving over a Horizontal Surface. ARC CP-911,1964. (AD-809897) (U)
2. A'Harrish, R. C., and Kwiatkowski, S. F.: A New Look at V/STOL Flying Qualities. IAS Paper 61-62, 1961. (U)
3. Alexander, A. J.: Experiments on Jet-Flap Delta Wing in Ground Effect. College of Aeronautics, Cranfield, G. B., CoA Rept. Aero 164, 1963. (U)
4. Alexander, A. J., and Williams, J.: Wind-Tunnel Experiments on a Rectangular-Wing Jet-Flap Model of Aspect-Ratio 6. ARC R&M 3329, 1961. (U)
5. Alford, W. J., Jr., and Harris, R. V., Jr.: Cruise Performance and Stability Considerations for Jet V/STOL Aircraft, 1966. (N66-24617) (U)

*A number of new low-speed wind tunnels are presently being planned or built, and their designs have been influenced by the requirements of V/STOL model testing.

6. Alvarez-Calderon, A.: VTOL and the Rotating Cylinder Flap. *Annals of the N. Y. Academy of Sciences*, Vol. 107, Art. 1, 1963. (U)
7. Anderson, S. B.: An Examination of Handling-Qualities Criteria for V/STOL Aircraft. NASA TN D-331, 1960. (AD-241025) (U)
8. Anderson, S. B., and Tapscott, R. J.: A Review of V/STOL Handling-Qualities Criteria. Unpublished NASA Report, 1963. (U)
9. Anderson, S. B., Quigley, H. C., and Innis, R. C.: Stability and Control Considerations for STOL Aircraft. AIAA P-65-715, 1965. (U)
10. Anderton, D. A.: Auxiliary Surfaces Boost STOL Control. *Aviation Week and Space Technology*, Vol. 76, 1962. (U)
11. Anon.: AeCAN Data Sheet-Breguet 941. *The Aeroplane and Commercial Aviation News*, Vol. 104, 1962. (U)
12. Anon.: Aerodynamic Problems Associated With V/STOL Aircraft, Vol. II. Propulsion Interference Aerodynamics. CAL Symposium, 1966. (AD-657563) (N67-86835) (U)
13. Anon.: Aerodynamic Problems Associated with V/STOL Aircraft. Vol. IV. Panels on Recommended V/STOL Aerodynamic Research. CAL/USAAVLABS Symposium Proceedings, 1966. (AD-657565) (U)
14. Anon.: The Aerodynamics of V/STOL Aircraft. AGARDograph 126, 1968. (N69-29645) (U)
15. Anon.: AIAA Aerodynamic Testing Conference, 1964. (N64-17013) (U)
16. Anon.: Application of a Mechanical Gyroscopic Stabilizer to VTOL Aircraft. Kellett Aircraft Corporation Report 220A90-2, 1963. (U)
17. Anon.: Aspects of V/STOL Aircraft Development. Agard-Advisory-13, 1967. (N68-23761) (U)
18. Anon.: Auto-Trim VTOL Feasibility Study Final Report. Goodyear Report GER-10409, 1961. (U)
19. Anon.: Comparative Performance Charts for Ducted Propellers. Hiller Aircraft Corporation Report ARD-257, 1960. (U)
20. Anon.: Conference on V/STOL and STOL Aircraft. NASA SP-116, 1966. (N66-24606) (U)
21. Anon.: The Development of an All Mechanical Control System for VTOL-STOL Aircraft. Northrop Corporation NOR 62-237, 1963. (C) Title Unclassified
22. Anon.: Estimated Static Stability and Control Characteristics. G. E. Rept. 146, 1964. (AD-639236) (U)
23. Anon.: Extracts from the First and Second Recommendations of the ACOA to the Technical Advisory Panel of the National Aeronautical Research Committee, 1964. (AD-474541) (N65-10909) (U)
24. Anon.: Final Systems Analysis and Flight Simulation Report. Vol. II, G. E. Rept. 157, Vol. 2, 1965. (AD-639230) (U)
25. Anon.: Flight-Testing Experiments with the Tilt-Wing Aircraft. IAS Paper 59-8, 1959. (U)
26. Anon.: Full-Scale Tests of the XV-4A Hummingbird in the Ames 40 x 80 Foot Wind Tunnel. G. E. Report ER-7634, 1965. (AD-654783) (U)
27. Anon.: Full Scale Wind-Tunnel Test Report. G. E. Report 153, 1966. (AD-654043) (U)
28. Anon.: Integration of Propulsion Systems in Airframes. AGARD CP-27, 1967. (AD-672073) (N68-28850) (U)
29. Anon.: An Investigation Into the Loss of Thrust Occurring in a Wing-Fan System Due to Ground Effects. Boulton Paul Aircraft Ltd., T.N. 10, 1959. (U)
30. Anon.: Lift on a Wing in a Propeller Slipstream as Related to Low-Speed Flight. IAS Preprint 643, 1966. (U)
31. Anon.: Low-Speed Free-Air Tests of a Powered .165-Scale Four-Engine Tilt-Wing V/STOL Model. North American Aviation, 1962. (U)
32. Anon.: NASA Conference on V/STOL Aircraft. Compilation of the papers presented at Langley Research Center, Nov. 1960. (N63-14683) (U)

33. Anon.: The P-1127 Analysed. *Flight International*, October 11, 1962. (U)
34. Anon.: Phase I Flight Test Results (XV-5A), Vol. I. G. E. Report 166, Vol. 1, 1966. (AD-639231) (N67-13030) (U)
35. Anon.: Phase I Flight Test Results (XV-5A), Vol. II. G. E. Report 166, Vol. 2, 1966. (AD-639232) (N67-13031) (U)
36. Anon.: Phase I Flight-Test Results (XV-5A), Vol. III. G. E. Report 166, Vol. 3, 1966. (AD-639233) (N67-13907) (U)
37. Anon.: A Preliminary Study of V/STOL Transport Aircraft and Bibliography of NASA Research in the VTOL-STOL Field. NASA TN D-624, 1961. (U)
38. Anon.: Proceedings of a NASA Briefing on VTOL/STOL Aircraft Research. U.S. Army Transportation Research Command, 1959. (U)
39. Anon.: Provisional Recommendations for V/STOL Handling Qualities. AGARD Ft. Mech. Panel Working Group on V/STOL Handling Qualities, 1962. (U)
40. Anon.: Recommendations for V/STOL Handling Qualities with an Addendum Containing Comments on the Recommendations. AGARD 408A, 1964. (AD-661748) (N65-28861) (U)
41. Anon.: Results of Static Test of a Full-Scale Wing-Mounted Tip-Turbine-Driven Lift Fan. TREC TR-62-21, 1962. (AD-285037) (N64-31128) (U)
42. Anon.: Results of Wind-Tunnel Tests of a Full-Scale Fuselage-Mounted, Tip-Turbine-Driven Lift Fan, Vol. 2. G. E. TR-61-15-V2, 1961. (AD-263450) (U)
43. Anon.: Results of Wind-Tunnel Tests of a Full-Scale Wing-Mounted, Tip-Turbine-Driven Lift Fan. ATRECOM TR-63-21, 1963. (AD-426785) (U)
44. Anon.: Review of NASA-Ames Research Program on VTOL/STOL Aircraft Concepts. NASA-Ames Research Center, 1960. (U)
45. Anon.: STOL Light-Intratheater-Transport Study. Vol. 2. Design. Part 2. Performance, Stability and Control. Boeing D-8-2113, Vol. 2, Pt. 2, 1968. (AD-393112) (U)
46. Anon.: Symposium on Vertical and Short Take-off and Landing Aircraft. Parts I and II. AGARDograph 46, 1970. (U)
47. Anon.: Tentative Airworthiness Standards for Verticraft/Powered Lift-Transport Category Aircraft. Federal Aviation Admin., 1968. (U)
48. Anon.: Theoretical Investigation and Examination by Measuring Tests of the Thrust Control by Rudders Uniformly Tilted at the Outlet of a Duct. Bureau Technique Zborowski, 1959. (U)
49. Anon.: Vertical Take-off Planes. A DDC Bibliography. Vol. I, 1968. (AD-683500) (N69-24602) (U)
50. Anon.: Vertical Take-off Planes. Vol. II. DDC-TAS-68-65, 1968. (AD-849500) (U)
51. Anon.: Vertical Take-off Planes. Vol. V. Experimental and Research Models. DDC-TAS-68-68, 1968. (AD-849501) (U)
52. Anon.: The Vertodyne VTOL Aircraft Study Semi-Span Model Tests in Hovering and Forward Flight. Vertol Division, Boeing Aircraft Company Report R-158, 1960. (U)
53. Anon.: V/STOL Control System Design Unveiled. *Aviation Week and Space Technology*, April 1961. (U)
54. Anon.: VTOL-1968. AIAA Paper 68-977, 1968. (A68-44931) (U)
55. Anon.: Wind-Tunnel-Test Report, Lift-Fan Powered-Scale Model. G. E. Report 137, 1963. (AD-647386) (U)
56. Anon.: XV-5A Lift-Fan Flight Research Aircraft Program; Estimated Dynamic Stability Characteristics. G. E. Report 151, 1964. (AD-639235) (U)
57. Anon.: XV-5A Lift-Fan Flight Research Aircraft Program; Estimated Static Stability and Control Characteristics. G. E. Report 146, 1964. (AD-639236) (U)

58. Aoyagi, K., Hickey, D. H., and deSavigny, R. A.: Aerodynamic Characteristics of a Large-Scale Model with a High Disk-Loading Lifting Fan Mounted in the Fuselage. NASA TN D-775, 1961. (AD-265252) (N62-71349) (U)
59. Archino, D. T.: Simplified Approximations of Interference Effects on Jet V/STOL Aircraft. AFIT Report No. GAM/AE/68-2, 1968. (AD-833270) (U)
60. Asmus, F. J.: Design and Development of the Tip-Turbine Lift Fan. Annals of the N.Y. Academy of Sciences, Vol. 107, Art. 1, 1963. (A63-14980) (U)
61. Augustine, N. R.: An Investigation of the Fundamental Parameters Which Govern the Aerodynamics of Various Wing-Propeller Combinations as Related to Vectored-Slipstream Aircraft. Princeton University Report 37, 1958. (U)
62. Barche, J., et al: Jet Problems with V/STOL Aircrafts. Meeting Report of WGLR Tech. Comm. on Aerodyn., 1967. (N68-13985) (U)
63. Barrack, J. P., and Kirk, J. V.: Low-Speed Characteristics of High-Performance Lift-Engine V/STOL Aircraft. SAE Paper 680644, 1968. (A68-45072) (U)
64. Basile, G., Fitzpatrick, J. E., and Zon, J.: Estimated Flying Qualities of the Kaman K-16B VTOL/STOL Aircraft. Kaman Aircraft Corp., G-113-4, 1959. (AD-219400) (U)
65. Bates, W. R., Lovell, P. M., Jr., et al: Additional Studies of the Stability and Controllability of an Unswept-Wing Vertically-Rising Airplane Model in Hovering Flight Including Studies of Various Tethered Landing Techniques. NACA RM L51107a, 1949. (U)
66. Bates, W. R., Lovell, P. M., Jr., et al: Dynamic Stability and Control Characteristics of a Vertically-Rising Airplane Model in Hovering Flight. NACA RM L50J16, 1951. (U)
67. Beilman, J. L.: X-22A Variable Stability System. Presented at First National V/STOL Symposium, Nov. 1965. (U)
68. Benner, S. D.: The Coanda Effect at Deflection Surfaces Widely Separated from the Jet Nozzle. TRECOM TR-64-70, 1965. (AD-610525) (N65-17862) (U)
69. Beppu, G., and Curtiss, H. C., Jr.: An Analytical Study of Factors Influencing The Longitudinal Stability of Tilt-Wing VTOL Aircraft. Princeton University R756, USAAVLABS TR-66-53, 1966. (AD-640945) (U)
70. Biermann, D., and Conway, R. N.: The Selection of Propellers for High Thrust at Low Airspeed. NACA WR L-483, 1941. (U)
71. Biermann, D., Gray, W. H., et al: Wind-Tunnel Tests of Single- and Dual-Rotating Tractor Propellers of Large Blade Width. NACA WR L-385, 1942. (U)
72. Black, D. M., Wainauski, H. S., and Rohrbach, C.: Shrouded-Propeller - A Comprehensive Performance Study. AIAA Paper 68-994, 1968. (U)
73. Black, D. M., and Wainauski, H. S.: Shrouded-Propeller Test Program Data Analysis. Hamilton Standard Report HSER 4348, Vol. 1, 1967. (AD-820759) (U)
74. Black, E. L., and Booth, G. C.: Correlation of Aerodynamic Stability and Control Derivatives Obtained from Flight Tests and Wind-Tunnel Tests on the XC-142A Airplane. AFFDL TR-68-167, 1968. (AD-854018) (X69-17816) (U)
75. Blakeslee, D. J.: Empirical Relationships for Jet-Flap Lift and Drag Prediction. Aerospace Eng., Nov. 1960. (U)
76. Bock, G., Klug, H. G., and Spintzyk, H.: VTOL/STOL Aircraft - First Supplement 1961/62. AGARD Report, 1963. (AD-427826) (U)
77. Bock, G., and Spintzyk, H.: VTOL/STOL Aircraft Bibliography. Institut Fur Luftfahrttechnik, for AGARD, 1961. (AD-266061) (U)
78. Borst, H. V.: Design and Development Considerations of the X-19 VTOL Aircraft. Annals of the N.Y. Academy of Sciences, Vol. 107, Art. 1, 1963. (U)
79. Botrel, A., et al: Recommendations for V/STOL Handling Qualities. AGARD R-408, 1962. (AD-410323) (N63-13660) (U)

80. Boyden, R. P., and Curtiss, H. C., Jr.: Investigation of the Lateral-Directional Stability Characteristics of a Four-Propeller, Tilt-Wing VTOL Model at Low Speeds. Princeton Univ. Rept. 743, USAAVLABS TR-68-19. (AD-673147) (N68-35391) (U)
81. Bradbury, L. J. S., and Wood, M. N.: Static-Pressure Distribution Around a Circular Jet Exhausting Normally From a Plane Wall Into an Airstream. RAE TN Aero 2978, 1964. (AD-453315) (U)
82. Brady, W. G., and Ludwig, G.: Theoretical and Experimental Studies of Impinging Uniform Jets. American Helicopter Society Journal, Vol. 8, 1963. (A63-17411) (U)
83. Brenckmann, M.: Experimental Investigation of the Aerodynamics of a Wing in a Slipstream. Univ. of Toronto, Institute of Aerophysics, TN 11, 1957. (U)
84. Brenckmann, M.: Improvements in Longitudinal Stability and Control During the Landing Approach of STOL Aircraft. AIAA-CASI Paper 64-804, 1964. (A64-27416) (U)
85. Breul, H. T.: A Simulator Study of Low-Speed VTOL Handling Qualities in Turbulence. Grumman Aircraft Engineering Corporation Final Research Report RE-238, 1966. (AD-477949) (N66-24861) (U)
86. Breul, H. T.: A Simulator Study of Tilt-Wing Handling Qualities. Grumman Aircraft Engineering Corporation Report RE-162, 1963. (AD-402774) (N63-15725) (U)
87. Brogan, E., Casey, G., et al: Vertodyne Fan-in-Wing VTOL Aircraft. Vertol Aircraft Corp. Final Summary Report R-254, 1961. (AD-265569) (U)
88. Brogan, E., Casey, G., et al: The Vertodyne VTOL Aircraft Study Semi-Span Model Tests in Hovering and Forward Flight. Vertol Aircraft Rept. R-158, 1960. (AD-234751) (U)
89. Burgan, E. T., and Matthews, J. T.: Wind-Tunnel Tests of a 1/8-Scale Powered Model K-16B Kaman VTOL/STOL Airplane. DTMB Report 998, 1961. (AD-254940) (U)
90. Burkhardt, W.: Optimization of VTOL-Flight-Control Characteristics in Hovering. EWR-89-63, 1963. (N64-10900) (U)
91. Butler, L., Goland, L., and Huang, K. P.: An Investigation of Propeller Slipstream Effects on V/STOL Aircraft Performance and Stability. USAAVLABS TR-65-81, 1966. (AD-629637) (N66-22604) (U)
92. Butler, S. F. J., Moy, B. A., and Hutchins, G. D.: Low-Speed Wind-Tunnel Tests of Aspect-Ratio-9 Jet-Flap Model, With Ground Simulation by Moving Belt Rig. ARC CP-849, 1966. (U)
93. Butler, S. F. J., Guyett, M. B., and Moy, B. A.: Six-Component Low-Speed Tunnel Tests of Jet-Flap Complete Models with Variation of Aspect Ratio, Dihedral, Sweep, Including Influence of Ground Proximity. ARC R&M 3441, 1967. (U)
94. Butz, J. S.: Army Attempts Major STOL Advance. Aviation Week Including Space Technology, No. 22, 1959. (U)
95. Cahn, M. S.: The Design and Performance of Shrouded Propellers. SAE Preprint 587C, 1962. (U)
96. Campbell, G. S.: Turbulence in the Wake of a Thin Airfoil at Low Speeds. NACA TM 1427, 1957. (U)
97. Campbell, W. S., and Von Ohain, H.: Thrust Augmentation -- Application to Jet Wing V/STOL Aircraft. Aerospace Research Labs., W-PAFB, OAR-607-3, Vol. 2, 1967. (AD-383444) (X68-10381) (C) Title Unclassified
98. Carpenter, D. O., and Jenny, R. B.: Statistical Approach to Low-Speed Control Criteria for V/STOL Aircraft. AIAA Paper 64-286, 1964. (U)
99. Carter, A. W.: Effects of Jet-Exhaust Longitudinal Aerodynamic Characteristics of a Jet V/STOL Model. NASA TN D-5333, 1969. (N69-33210) (U)
100. Castle, R. A., Gray, A. L., and McIntyre, W.: Simulation of Helicopter and V/STOL Aircraft -- Computational Methods Analog -- Study, Equations of Motion of Vertical/Short Take-Off and Landing Operational Flight/Weapon System Trainers. Navy, Naval Training Device Center Report 1205-3, Vol. III, Pt. I, 1964. (AD-607737) (N65-11379) (U)
101. Chambers, J. R., and Grafton, S. B.: Calculation of the Dynamic Longitudinal Stability of a Tilt-Wing V/STOL Aircraft and Correlation with Model Flight Tests. NASA TN D-4344, 1968. (N68-15941) (U)

102. Chambers, J. R., and Grafton, S. B.: Static and Dynamic Longitudinal Stability Derivatives of a Powered 0.18-Scale Model of a Fan-in-Wing VTOL Aircraft. NASA TN D-4322, 1968. (N68-15894) (U)
103. Chambers, J. R., and Grafton, S. B.: Static and Dynamic Longitudinal Stability Derivatives of a Powered 1/9-Scale Model of a Tilt-Wing V/STOL Transport. NASA TN D-3591, 1966. (U)
104. Chinn, H. W.: Results of Flight Tests on the Short SC1 VTOL Research Aircraft with Particular Reference to Handling Qualities in the Hover and Transition Regimes. AGARD-527, 1965. (N67-14110) (U)
105. Church, R. M. W.: A Method for the Calculation of Force, Moment, and Power Coefficients of Propellers in Forward Flight of Tilt Angles from 0 to 90°. AL-119, 1969. (AD-855562) (U)
106. Cincotta, G. A., and Dunn, H. S.: The Static and Dynamic Stability of a Deflected-Slipstream Vehicle. Princeton Univ. Report 407, 1958. (U)
107. Clark, J. W., Miller, D. P., and Gallant, R. A.: Investigation of Control and Stability Augmentation Requirements for Tandem-Tilting Ducted-Propeller VTOL Transports. UAC R-1624-5, 1963. (AD-419126) (N63-22245) (U)
108. Clark, J. W., and Miller, D. P.: Research on Methods for Presenting VTOL Aircraft Handling-Qualities Criteria for Unstable Systems. UAR-B175, 1964. (N64-14141) (U)
109. Coles, A. V.: Control Characteristics of Vectored-Thrust V/STOL Vehicles in the Transition Regime. American Helicopter Society Journal, Vol. 13, 1968. (A68-30961) (U)
110. Colin, P. E.: Experimental Investigation of Some Ground-Proximity Problems Associated with ACV and VTOL Types of Vehicles. Von Karman Institute for Fluid Dynamics, Final Technical Report, 1966. (AD-801819L) (U)
111. Colin, P. E.: Ground Proximity and the VTOL Aircraft. AGARD Report 409, 1962. (AD-422560) (N64-10133) (U)
112. Colin, P. E.: Powered-Lift-Model Testing for Ground-Proximity Effects. Report No. TCEA TN-14, 1963. (AD-437657) (N64-25031) (U)
113. Colin, P. E.: A Preliminary Investigation on V/STOL Model Testing for Ground-Proximity Effects. Wissenschaftlichen Gesellschaft fur Luftfahrt Paper No. 30, 1962. (N63-10028) (U)
114. Colin, P. E.: The Wall Jet Beneath a Counter-Flowing Stream. Final Report VK1FD, 1968. (AD-673200) (N68-35705) (U)
115. Conway, H. G.: The Development of the SC-1. Flight, June 1960. (U)
116. Conway, J. A.: The Augmentor Wing: A New Approach to Jet STOL. SAWE Tech. Paper 624, 1967. (U)
117. Corden, C. D., and Everett, W. L.: Simulation Approach to Development of the XV-5A Lift-Fan V/STOL Aircraft. SAE Paper 755A, 1963. (A63-25844) (U)
118. Cornish, J. J., III, and Tanner, R. F.: High-Lift Techniques for STOL Aircraft. SAE P-670245, 1967. (U)
119. Coward, K. S.: Propeller Selection for High-Static and Forward-Flight Efficiency for VTOL Aircraft. Aero. Eng. Rev., July 1957. (U)
120. Coward, K. S.: Propeller Static Thrust. Aerospace Eng., March 1959. (U)
121. Cox, M., and Abbott, W. A.: Studies of the Flow Fields Created by Single Vertical Jets Directed Downwards upon a Horizontal Surface. ARC CP-912, 1967. (AD-813962) (U)
122. Crabtree, L. G.: The Rotating Flap as a High-Lift Device. (Inc. I App. II: Kirby, D. A.: Power Required to Rotate the Flap of a Typical Four-Engined Transport). ARC CP-480, 1960. (U)
123. Crabtree, L. G., and Kirby, D. A.: The Rotating Flap as a High-Lift Device. Appendix I. Theory of an Aerofoil with Rotating Flap. Appendix II. Power Required to Rotate the Flap of a Typical Four-Engined Transport. RAE TN Aero 2492, 1957. (U)
124. Craig, S. J., and Campbell, A.: Analysis of VTOL Handling-Qualities Requirements, Part 1 - Longitudinal Hover and Transition. AFFDL TR-67-179, Part 1, 1968. (AD-845165) (U)
125. Craig, S. J.: Survey of Lateral Hover Mode Satisfactory and Unacceptable Dynamics. STI Working Paper 171-3, 1968. (U)

126. Crigler, J. L., and Gilman, J.: Calculation of Aerodynamic Forces on a Propeller in Pitch or Yaw. NACA TN 2585, 1952. (U)
127. Crim, A. D.: Hovering and Low-Speed Controllability of VTOL Aircraft. Jour. of the American Helicopter Soc., January 1959. (U)
128. Cromwell, C. H., III, and Payne, H. E., III: A Stability Analysis of Tilt-Wing Aircraft (Analytical). Princeton Univ. Report 477, 1960. (A61-881) (U)
129. Cumberbatch, E.: A Lifting-Surface Theory for Wings at High Angles of Attack Extending Through Multiple Jets. VRC Report No. 9, 1963. (AD-423274) (U)
130. Curnutt, R. A., and Curtiss, H. C., Jr.: Comparison of Longitudinal Stability Characteristics of Three Tilt-Wing VTOL Aircraft Designs. Princeton Univ. R749, USAAVLABS TR-66-64, 1968. (AD-667983) (N68-26700) (U)
131. Currie, M. M., and Dunsby, J. A.: Pressure Distribution and Forces Measurements on a VTOL Tilting Wing-Propeller Model. Part II: Analysis of Results. NRC LR-284, 1960. (U)
132. Curry, P. R., and Matthews, J. T., Jr.: Suggested Requirements for V/STOL Flying Qualities. USAAVLABS TR-65-45, 1965. (AD-617748) (U)
133. Curtiss, H. C., Jr.: An Analytical Study of the Dynamics of Aircraft in Unsteady Flight. USAAVLABS TR-65-48, 1965. (AD-627370) (N66-20863) (U)
134. Curtiss, H. C., Jr., and Struble, R. W.: Downwash Tests of the Dual-Tandem Ducted-Propeller VTOL Research Aircraft Configurations to Evaluate Engine Inlets, Protection Devices and Study Aerodynamic Interference. Kellett Aircraft Corporation Report 179T80-12, 1965. (N66-21906) (U)
135. Curtiss, H. C., Jr.: Dynamic Stability of V/STOL Aircraft at Low Speeds. AIAA Paper 69-194, 1969. (A69-19566) (U)
136. Curtiss, H. C., Jr., Putman, W. F., and Lebacqz, J. V.: An Experimental Investigation of the Longitudinal Dynamic Stability Characteristics of a Four-Propeller Tilt-Wing VTOL Model. Princeton Univ. R 774, USAAVLABS TR-66-80, 1967. (AD-663848) (U)
137. Curtiss, H. C., Jr., Putman, W. F.: General Description of the Princeton Dynamic-Model Track. USAAVLABS TR-66-73, 1966. (AD-645883) (N67-22608) (U)
138. Curtiss, H. C., Jr.: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model. Vol. IV. The Longitudinal Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model at High Duct Incidence. USAAVLABS TR-68-49D, 1968. (AD-859276) (U)
139. Curtiss, H. C., Jr., and Putman, W. F.: Results of Experimental Correlation of Model and Full-Scale Helicopter and VTOL Longitudinal Dynamics. Princeton Univ. Report 543, 1961. (U)
140. Curtiss, H. C., Jr.: Some Basic Considerations Regarding Longitudinal Dynamics of Aircraft and Helicopters. Princeton Univ. Report 562, 1961. (U)
141. Czinczenheim, J.: Aerodynamic Design and Flight Development of the Breguet 941 STOL Aircraft. RAE LT-1063, No. 3, 1964. (AD-443858) (U)
142. Dathe, H. M.: Review of Hovering Control Requirements for VTOL Aircraft by a Flight-Dynamics Analysis. AGARD 472, 1963. (AD-438878) (N64-19855) (U)
143. Davenport, E. E., and Spreemann, K. P.: Thrust Characteristics of Multiple Lifting Jets in Ground Proximity. NASA TN D-513, 1960. (U)
144. Davenport, E. E., and Spreemann, K. P.: Transition Characteristics of a VTOL Aircraft Powered by Four Ducted-Tandem Propellers. NASA TN D-2254, 1964. (U)
145. Davenport, E. E., and Kuhn, R. E.: Wind-Tunnel-Wall Effects and Scale Effects on a VTOL Configuration with a Fan Mounted in the Fuselage. NASA TN D-2560, 1965. (N65-13574) (U)
146. Davidson, J. K.: Aerodynamics of the Propulsive Wing. Presented at AF V/STOL Technology and Planning Conf., Sept. 1969. (U)

147. Davidson, J. K.: LTV Low-Speed Wind-Tunnel-Test Number 190, Follow-On Test of High-Mass-Rate Vectored-Propulsion Flow Model. LTV Report 2-53310/5R-2217, 1965. (AD-621578) (U)
148. Daw, D. F., Gould, D. G., and McGregor, D. M.: A Flight Investigation of the Effects of Weathercock Stability on V/STOL Aircraft Directional Handling Qualities. NRC LR-400, 1964. (AD-442252) (U)
149. Deckert, W. H., Page, V. R., and Dickinson, S. O.: Large-Scale Wind-Tunnel Tests of Descent Performance of an Airplane Model with a Tilt-Wing and Differential Propeller Thrust. NASA TN D-1857, 1964. (U)
150. deDecker, R. W.: Investigation of an Isolated Monocyclic V/STOL Propeller Performance and Oscillatory Stress. USAAVLABS TR-65-8U, 1966. (U)
151. dePontfarcy, B., and Labussiere, A.: Investigation on the STOL — Starting from the Airplane Breguet 941. Wissenschaftliche Gesellschaft für Luftfahrt Jahrbuch, 1960. (U)
152. de-Richenont, G.: Methods Utilized for Perfecting the Breguet 940 Blown-Wing Airplane. AGARD-371, 1961. (N62-15540) (U)
153. deSavigny, R. A., and Hickey, D. H.: Aerodynamic Characteristics in Ground Effect of a Large-Scale Model with a High Disk-Loading Lifting Fan Mounted in the Fuselage. NASA TN D-1557, 1963. (N63-11617) (U)
154. DeYoung, J.: Force and Moment Derivatives Due to Propellers of Arbitrary Configuration Inclined with Respect to Free Stream. Grumman ADR 01-03-64.1, 1964. (U)
155. DeYoung, J.: Propellers at High Incidence. Jour. of Aircraft, May-June, 1965. (U)
156. DeYoung, J.: Symmetric Loading of a Wing in a Wide Slipstream. Grumman Rept. ADR 01-04-66.1, 1966. (U)
157. Dickerman, F. N., and Branson, C. F.: Lockheed BLC Hercules — A Practical STOL Transport. SAE S-259, 1960. (U)
158. Dickinson, S. O., Page, C. R., and Deckert, W. H.: Large-Scale Wind-Tunnel Investigation of an Airplane Model with a Tilt Wing of Aspect Ratio 8.4, and Four Propellers, in the Presence of a Ground Plane. NASA TN D-4493, 1968. (N68-20370) (U)
159. Dixon, C. J.: Lift Augmentation by Lateral Blowing Over a Lifting Surface. AIAA Paper 69-193, 1969. (U)
160. Dods, J. B., Jr., and Watson, E. C.: The Effects of Blowing Over Various Trailing-Edge Flaps on an NACA 0006 Airfoil-Section, Comparisons with Various Types of Flaps on Other Airfoil Sections, and an Analysis of Flow and Power Relationships for Blowing Systems. NACA RM A56C01, 1956. (U)
161. Dolbin, B. H., Jr.: Investigation of Lateral-Directional Handling Qualities of V/STOL Airplanes. Cornell Aeronautical Laboratory Report FDM 348, 1963. (U)
162. Dornier, S.: The STOL Experimental Aircraft Do. 29. AGARD Symposium, Paris, June 1960. (U)
163. Down, H. W., Jr., Jones, G. E., and Satterwhite, J. J.: XC-142A Limited Category II Stability and Control Tests. AFFTC-TR-68-9, 1968. (AD-840552) (U)
164. Draper, J. W., and Kuhn, R. E.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack up to 90°. NACA TN 3304, 1954. (U)
165. Draper, J. W., and Kuhn, R. E.: Some Effects of Propeller Operation and Location on Ability of a Wing with Plain Flaps to Deflect Propeller Slipstreams Downward for Vertical Take-off. NACA TN 3360, 1955. (U)
166. Drinkwater, F. J., III.: Operational Technique for Transition of Several Types of V/STOL Aircraft. NASA TN D-774, 1961. (AD-252988) (U)
167. Dukes, T. A., Carballal, J. M., et al: Some Dynamic Aspects of Stability in Low-Speed Flying Machines. TRECOM TR-63-56, 1963. (AD-431566) (U)
168. Dunsby, J. A., Currie, M. M., et al: Pressure Distribution and Force Measurements on a VTOL Tilting Wing-Propeller Model. Part I: Description and Tabulated Results. NRC LR-252, 1959. (AD-225870) (U)
169. Duvivier, J. F., and McCallum, R. B.: Investigation of Tilting-Duct and Fan-Wing in Transition Flight. TREC TR-61-19, 1960. (U)

170. Ellis, D. R., and Carter, G. A.: A Preliminary Study of the Dynamic Stability and Control Response Desired for V/STOL Aircraft. Princeton Univ. Report 611, 1962. (AD-289561) (U)
171. Erickson, J. C., Jr.: New Considerations of the Fluctuating Flow Field in Propeller Theory. CAL-BB-2670-S-1, 1968. (AD-680232) (U)
172. Erickson, J. C., Jr.: The Pitching-Moment Coefficient of a Jet-Flapped Airfoil. Jour. Aero. Sci., Dec. 1962. (U)
173. Erickson, J. C., Jr., Borst, H. V., and Ladden, R. M.: A Theory for VTOL Propeller Operation in a Static Condition. USAAVLABS TR-65-69, 1965. (AD-623527) (U)
174. Erlandsen, P., Zarcard, J. G., and Olcott, J. W.: Wind-Tunnel Correlation Study of North American Tilt-Wing Model Tested in the NACA L 14' x 16' Tunnel and the Airship Model Test Facility. Naval Air Station, Lakehurst, N. J., 1962. (U)
175. Ernst, G., and Jardinier, J.: Influence Des Effets Gyroscopiques d'un Turboreacteur sur un Avion Decollant a la Verticale. Extrait de Doxaero No. 48, 1958. (U)
176. Ernst, G.: A Method of Artificially Stabilizing Jet-Sustained Aircraft. Wissenschaftliche Gesellschaft fur Luftfahrt Jahrbuch, 1960. (U)
177. Ernst, G., and Jardinier, J.: Stabilization of VTOL Aircraft in Vertical Flight. RAE LT-892, 1962. (AD-272521) (U)
178. Fay, C. B.: A Cursory Analysis of the VTOL Tilt-Wing Performance and Control Problems. Annals of the N.Y. Academy of Sciences, Vol. 107, Art. 1, 1963. (U)
179. Faye, A. E., Jr.: Attitude Control Requirements for Hovering Determined Through the Use of a Piloted Flight Simulator. NASA TN D-792, 1961. (U)
180. Feistel, T. W., Gerdes, R. M., and Fry, E. B.: An Investigation of a Direct Side-Force Maneuvering System on a Deflected-Jet VTOL Aircraft. NASA TN D-5175, 1969. (U)
181. Fimple, W. R.: An Experimental Investigation of the Aerodynamic Forces and Moments on a Jet-Flapped Wing in the Presence of a Propeller Slipstream and a Free Stream. Princeton Univ. Report 571, 1961. (AD-270966) (U)
182. Fink, M. P.: Aerodynamic Characteristics, Temperature, and Noise Measurement of Large-Scale, External-Flow Jet-Augmented-Flap Model with Turbojet Engines Operating. NASA TN D-943, 1961. (U)
183. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing with 0.4-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.22 Chord Below Wing. NASA TN D-5016, 1969. (N69-17312) (U)
184. Fink, M. P., Mitchell, R. G., et al: Aerodynamic Data on a Large Semispan Tilting Wing with 0.5-Diameter Chord, Double-Slotted Flap, and Both Left- and Right-Hand Rotation of a Single Propeller. NASA TN D-3375, 1966. (U)
185. Fink, M. P.: Aerodynamic Data on a Large Semispan Tilting Wing with a 0.5-Diameter Chord, a Double-Slotted Flap, and Left- and Right-Hand Rotation of a Single Propeller, in Presence of Fuselage. NASA TN D-3674, 1966. (U)
186. Fink, M. P., and Mitchell, R. G.: Aerodynamic Data on a Large Semispan Tilting Wing with a 0.5-Diameter Chord, a Single-Slotted Flap, and Both Left- and Right-Hand Rotation of a Single Propeller. NASA TN D-3754, 1967. (U)
187. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing with 0.5-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.08 Chord Below Wing. NASA TN D-4030, 1967. (U)
188. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing with 0.5-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.19 Chord Below Wing. NASA TN D-3884, 1967. (U)
189. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on a Large Semispan Tilting Wing with 0.6-Diameter Chord, Fowler Flap, and Single Propeller Rotating Up at Tip. NASA TN D-2180, 1964. (N64-14729) (U)
190. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on Large Semispan Tilting Wing with 0.6-Diameter Chord, Single-Slotted Flap, and Single Propeller Rotating Down at Tip. NASA TN D-2412, 1964. (N64-28325) (U)
191. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on Large Semispan Tilting Wing with 0.6-Diameter Chord, Single-Slotted Flap, and Single Propeller Rotating Up at Tip. NASA TN D-1586, 1964. (N64-31221) (U)
192. Fink, M. P., and Smith, C. C., Jr.: Pressure Distribution of a Large Semispan Tilting Wing with 0.4-Diameter Chord, Single-Slotted Flap, and a Single Propeller 0.22 Chord Below Wing. NASA TN D-5481, 1969. (U)

193. Fink, M. P.: Static Tests of an External-Flow Jet-Augmented-Flap Test Bed with a Turbojet Engine. NASA TN D-124, 1959. (U)
194. Finnestead, R. L., Welter, W. L., and Ferrell, K. R., et al: Engineering Flight Research Evaluation of the XV-5A Lift-Fan Aircraft - Part 1, Stability and Control, Final Report. U.S. Army, Test and Evaluation Command Project 4-5-1220-01, Part 1, 1966. (AD-800973L) (U)
195. Fisher, I. A.: Testing the Kestrel. AGARD Report 518, 1965. (N67-19243) (U)
196. Fitch, C. R.: Three-Dimensional Aerodynamic Representation of V/STOL Wings by the Vortex-Lattice Method. AEDC-TR-68-6, 1968. (AD-826007) (U)
197. Fitzpatrick, J. E.: Longitudinal Characteristics of the K-16B Aircraft Based on 1/8-Scale Model Wind-Tunnel-Test Results. Kaman Report No. G-113-31, 1961. (U)
198. Fletcher, H. S.: Experimental Investigation of Lift, Drag, and Pitching Moment of Five Annular Airfoils. NACA TN 4117, 1957. (U)
199. Fletcher, J.: Aerodynamic Design Problems of Jet-Lift VTOL Aircraft. Aircraft Eng., July 1962. (U)
200. Flinn, E. H., and Statler, I. C.: V/STOL Aerodynamic Stability and Control. Presented at AF V/STOL Technology and Planning Conf., Sept. 1969. (U)
201. Foody, J. J.: The Control System of the S. C. 1. Shell Aviation News, No. 283, 1962. (U)
202. Foody, J. J.: Controlling VTOL Aircraft at Transition Speeds. Control, Part I, II, III, September, October, and November 1960. (U)
203. Fry, E. B., Greif, R. K., and Gerdes, R. M.: Use of a Six-Degree-of-Freedom Motion Simulator for VTOL Hovering Tasks. NASA TN D-5383, 1969. (N69-35359) (U)
204. Fuetterer, H., and Harms, L.: Jet-Interference Measurements on a V/STOL Model with Jet Simulation by Fans. AGARD CP-22, 1967. (N68-22500) (U)
205. Gainer, G.: Low-Speed Wind-Tunnel Investigation to Determine the Aerodynamic Characteristics of a Rectangular Wing Equipped with a Full-Span and an Inboard Half-Span Jet-Augmented Flap Deflected 55°. NASA Memo 1-27-59L, 1959. (U)
206. Garner, J. E.: A Review of Jet-Efflux Studies Applicable to V/STOL Aircraft. AEDC TR-67-163, 1967. (AD-658432) (N67-39617) (U)
207. Garren, J. F., Jr., and Kelly, J. R.: Description of an Analog-Computer Approach to V/STOL Simulation Employing a Variable-Stability Helicopter. NASA TN D-1970, 1964. (U)
208. Garren, J. F., Jr.: Effects of Coupling Between Pitch and Roll-Control Inputs on the Handling Qualities of VTOL Aircraft. NASA TN D-1233, 1962. (AD-273086) (U)
209. Garren, J. F., Jr., Kelley, J. R., and Reeder, J. P.: Effects of Gross Changes in Static Directional Stability on V/STOL Handling Characteristics Based on a Flight Investigation. NASA TN D-2477, 1964. (U)
210. Garren, J. F., Jr.: Effects of Gyroscopic Cross Coupling Between Pitch and Roll on the Handling Qualities of VTOL Aircraft. NASA TN D-812, 1961. (AD-255198) (U)
211. Garren, J. F., Jr.: Effects of Gyroscopic Cross Coupling Between Pitch and Yaw on the Handling Qualities of VTOL Aircraft. NASA TN D-973, 1961. (U)
212. Garren, J. F., Jr., Kelly, J. R., et al: A Visual Flight Investigation of Hovering and Low-Speed VTOL Control Requirements. NASA TN D-2788, 1965. (U)
213. Garren, J. F., Jr., and Assadourian, A.: VTOL Height-Control Requirements in Hovering as Determined from Motion Simulator Study. NASA TN D-1488, 1962. (U)
214. Gentry, G. L., and Margason, R. J.: Jet-Induced Lift Losses on VTOL Configurations Hovering In and Out of Ground Effect. NASA TN D-3166, 1966. (U)

215. George, M., and Kisielowski, E.: Investigation of Propeller-Slipstream Effects on Wing Performance. Final Report. Dynasciences Corp. Report, DCR-234, USAAVLABS TR-67-67, 1967. (AD-666247) (N68-21564) (U)
216. Gerdes, R. M.: A Piloted Motion-Simulator Investigation of VTOL Height-Control Requirements. NASA TN D-2451, 1964. (U)
217. Gerdes, R. M., and Weick, R. F.: A Preliminary Piloted Simulator and Flight Study of Height-Control Requirements for VTOL Aircraft. NASA TN D-1201, 1962. (U)
218. Gibson, M. M., and Norbury, J. F.: Nomogram Analysis for Ducted Fans with Pre-Rotation. Aircraft Eng., 1960. (U)
219. Gill, W. J.: Wind-Tunnel Tests of Several Ducted Propellers in Non-Axial Flow. Hiller Aircraft Corporation, Report ARD-224, 1959. (U)
220. Gilman, J.: Static Thrust and Torque Characteristics of Single and Dual-Rotating Tractor Propellers. NACA Memo Report L-750, 1955. (U)
221. Girard, P. F.: The Handling Qualities of VTOL Aircraft at Low Speed. IAS Preprint 843, 1958. (U)
222. Girard, P. F., and Everett, W. J.: A Test-Pilot Report on the X-13 Vertijet and VZ3RY Vertiplane. Annals of the N.Y. Academy of Sciences, Vol. 107, Art. I, 1963. (U)
223. Giulianetti, D. J., Biggers, J. C., and Maki, R. L.: Longitudinal Aerodynamic Characteristics in Ground Effect of a Large-Scale, V/STOL Model with Four Tilting Ducted Fans Arranged in a Dual-Tandem Configuration. NASA TN D-4218, 1967. (N67-39980) (U)
224. Giulianetti, D. J., Biggers, J. C., and Maki, R. L.: Longitudinal and Lateral-Directional Aerodynamic Characteristics of a Large-Scale, V/STOL Model with Four Tilting Ducted Fans Arranged in a Dual-Tandem Configuration. NASA TN D-3490, 1966. (N66-29218) (U)
225. Gobetz, F. W.: A Review of the Wing-Slipstream Problem with Experiments on a Wing Spanning a Circular Jet. Princeton Univ. Report 489, 1960. (U)
226. Goland, L., Miller, N., and Butler, L.: Effects of Propeller Slipstream on V/STOL Aircraft Performance and Stability. TRECOM TR-64-47, 1964. (AD-608186) (U)
227. Goldberger, S.: On the Relative Importance of the Low-Speed Control Requirement for V/STOL Aircraft. AEDC TR-66-205, 1966. (AD-644191) (N67-20708) (U)
228. Goldsmith, R., and Hickey, D. H.: Characteristics of Aircraft with Lifting-Fan Propulsion Systems for V/STOL. IAS Paper 63-27, 1963. (A63-11581) (U)
229. Goodson, K. W., and Grunwald, K. J.: Aerodynamic Characteristics of a Powered Semi-Span Tilting Shrouded-Propeller VTOL Model in Hovering and Transition Flight. NASA TN D-981, 1962. (U)
230. Goodson, K. W.: Effect of Ground Proximity on the Longitudinal, Lateral, and Control Aerodynamic Characteristics of a Tilt-Wing Four-Propeller V/STOL Model. NASA TN D-4237, 1967. (N68-11519) (U)
231. Goodson, K. W.: Ground Effects on a Four-Propeller Tilt-Wing Configuration Over a Fixed and a Moving Ground Plane. NASA TN D-3938, 1967. (N67-23820) (U)
232. Goodson, K. W.: Longitudinal Aerodynamic Characteristics of a Flapped Tilt-Wing Four-Propeller V/STOL Transport Model. NASA TN D-3217, 1966. (N66-16924) (U)
233. Gould, D. G.: Results of Recent Investigations of V/STOL Control and Response Requirements Using Variable-Stability Helicopters. AGARD-519, 1965. (N66-33488) (U)
234. Grabe, W.: Ground-Effect Experiments on a Fan-in-Wing Configuration at Zero Forward Speed. NRCC MET-369, 1962. (AD-292102) (U)
235. Grady, W. T.: Some Aerodynamic Aspects of Propellers for VTOL Aircraft. American Helicopter Soc., 3rd Annual Western Forum, October, 1956. (U)
236. Grasmann, K.: Jet Deflection for the Purpose of Thrust-Vector Control in V/STOL Aircraft. Wissenschaftliche Gesellschaft fur Luftfahrt Paper 29, 1962. (N63-10027) (U)

237. Greenberg, M. D., and Ordway, D. E.: The Ducted Propeller in Static and Low-Speed Flight. Therm Advanced Research TAR-TR-6407, 1964. (AD-608526) (N65-16112) (U)
238. Greenberg, M. D., Ordway, D. E., and Lo, C. F.: A Three-Dimensional Theory for the Ducted Propeller at Angle of Attack. Therm Advanced Research TAR-TR-6509, 1965. (AD-480994) (U)
239. Gregory, N., and Walker, W. S.: Measurement of Lift and Ground Interference on a Lifting-Fan Wing at Zero Forward Speed. ARC R&M 3263, 1962. (N62-10193) (U)
240. Gregory, N., and Love, E. M.: Wind-Tunnel Tests on a Nacelle Fitted with Two Lifting Fans in Tandem. ARC R&M 3494, 1967. (N68-12756) (U)
241. Greif, R. K., Fry, E. B., et al: Simulator Investigations of Various Control Systems for VTOL Aircraft. Conf. on V/STOL and STOL Aircraft, 1966. (N66-24623) (U)
242. Greif, R. K., Fry, E. B., et al: VTOL Control System Studies on a 6 Degree of Freedom Motion Simulator. ICAS-66-9, 1966. (U)
243. Griffin, J. M., et al: V/STOL Flying-Qualities Criteria. Presented at AF V/STOL Technology and Planning Conf., Sept. 1969. (U)
244. Griffin, R. N., Holzhauser, C. A., and Weiberg, J. A.: Large-Scale Wind-Tunnel Tests of an Airplane Model with an Unswept, Aspect-Ratio-10 Wing, Two Propellers, and Blowing Flaps. NASA Memo 12-3-58A, 1958. (U)
245. Griffith, J. H.: Proposed VTOL Flight Requirements. Annals of the N.Y. Academy of Sciences, Vol. 107, Art. 1, 1963. (U)
246. Grose, R. M.: Wind-Tunnel Tests of Shrouded Propellers at Mach Numbers from 0 to 0.6. WADC TR-58-604, 1958. (U)
247. Grunwald, K. J.: Aerodynamic Characteristics of a Four-Propeller Tilt-Wing VTOL Model with Twin Vertical Tails Including Effects of Ground Proximity. NASA TN D-901, 1961. (U)
248. Grunwald, K. J., and Goodson, K. W.: Aerodynamic Loads on an Isolated Shrouded-Propeller Configuration for Angles of Attack from -10° to 110° . NASA TN D-995, 1962. (AD-268842) (U)
249. Grunwald, K. J., and Goodson, K. W.: Division of Aerodynamic Loads on a Semispan Tilting-Ducted-Propeller Model in Hovering and Transition Flight. NASA TN D-1257, 1962. (U)
250. Grunwald, K. J.: Experimental Study of Wind-Tunnel-Wall Effects and Wall Corrections for a General-Research V/STOL Tilt-Wing Model with Flap. NASA TN D-2887, 1965. (U)
251. Grunwald, K. J.: Investigation of Longitudinal and Lateral Stability Characteristics of a Six-Propeller Deflected-Slipstream VTOL Model with Boundary-Layer Control Including Effects of Ground Proximity. NASA TN D-445, 1961. (AD-249651) (U)
252. Grunwald, K. J.: Investigation of a Semispan Tilt-Wing VTOL Model to Determine Ground Effect on Full-Span Flaps Used for Yaw Control in Hovering. NASA TN D-3437, 1966. (N66-27730) (U)
253. Guerrieri, M. A., and Stuart, J., III.: A Simplified Theoretical Investigation of a Wing-Propeller Combination Through a Range of Angles of Attack from 0° to 90° and a Comparison with Experimental Results. Hitler Helicopters Eng. Report. 461.31, 1955. (AD-103341) (U)
254. Gustafson, F. B., Pegg, R. J., and Kelley, H. L.: Aerodynamic Observations from Flight Tests of Two VTOL Aircraft. NASA Conference on V/STOL Aircraft, Langley Research Center, 1960. (BW-C-20000) (U)
255. Gyorgyfalvy, D.: Flight Investigation of Leading-Edge-Suction Boundary-Layer Control on a Liaison Type STOL Aircraft. Mississippi State Univ. Report 31, 1961. (U)
256. Hacker, T.: Problems of the Dynamics and Control of VTOL Aircraft: Optimum Guidance and Stability. Library Translation RAE-1186, 1966. (AD-810440) (N67-24586) (U)
257. Hafer, X.: V/STOL Control Systems, Especially Controlled by Thrust Modulation. AGARDograph 89-1, 1964. (N65-22900) (U)
258. Hall, L. P., Hickey, D. H., and Kirk, J. V.: Aerodynamic Characteristics of a Large-Scale V/STOL Transport Model with Lift and Lift-Cruise Fans. NASA TN D-4092, 1967. (N67-33454) (U)

259. Halley, D. H.: The Development of a Simplified Analytical Approach for Evaluation of the Dynamic Stability Characteristics of a Ducted-Propeller VTOL Aircraft in Transition. Princeton Univ. Aerospace and Mechanical Science Report 850, 1968. (U)
260. Ham, N. D., and Moser, H. H.: Preliminary Investigation of a Ducted Fan in Lifting Forward Flight. IAS Preprint 827, 1958. (U)
261. Hammond, A. D., and McLemore, H. E.: Hot-Gas Ingestion and Jet Interference Effects for Jet V/STOL Aircraft. NASA TM X-60449, 1967. (N68-26194) (U)
262. Hargraves, C. R.: An Analytical Study of the Longitudinal Dynamics of a Tilt-Wing VTOL. Princeton Univ. Report 561, 1961. (U)
263. Hartunian, R. A., Sowrydra, A., and Vidal, R. J.: The Aerodynamic Appraisal of STOL/VTOL Configurations. IAS Paper 60-37, 1960. (U)
264. Hayes, W. C., Kuhn, R. E., and Sherman, I. R.: Effects of Propeller Position and Overlap on the Slipstream Deflection. Characteristics of a Wing-Propeller Configuration Equipped with a Sliding and Fowler Flap. NACA TN 4404, 1958. (U)
265. Heinle, D. R.: The Use of Piloted Simulators in the Study of VTOL Flight. NASA Conference on V/STOL Aircraft, Langley Research Center, November 1960. (N63-14700) (U)
266. Helmbold, H. B.: Compressibility Effect on a Shrouded Propeller. Fairchild Aircraft Division, Eng. Report R221-012, 1955. (U)
267. Helmbold, H. B.: Performance Diagrams for Free and Ducted Propellers. Fairchild Aircraft Division, Eng. Report R221-013, 1956. (U)
268. Henderson, C., Kroll, J., and Hesby, A.: Control Characteristics of V/STOL Aircraft in Transition. Bell Aerosystems R-2023-917002, 1962. N66-81695) (U)
269. Henshaw, D. H., and Colavincenzo, O. M. S.: The Steady-State Lateral-Control Equations with Particular Reference to STOL Aircraft. Canadian Aeronautics and Space Jour., Vol. 10, 1964. (A64-15877) (U)
270. Herbst, W.: Calculation of the Aerodynamic Coefficients of a Finite Fan-in-Wing Airfoil. VDI Zeitschrift, Vol. 108, No. 27, 1966. (A66-43050) (U)
271. Hesby, A., and Sherman, E. W., Jr.: Wind-Tunnel-Test Data Report for the Full-Scale Powered-Duct Model. Bell Aerosystems R-2127-921007, 1965. (AD-487970L) (U)
272. Heyson, H. H.: Linearized Theory of Wind-Tunnel Jet-Boundary Corrections and Ground Effects for VTOL-STOL Aircraft. NASA TR R-124, 1962. (AD-269611) (N63-10219) (U)
273. Heyson, H. H.: Nomographic Solution of the Momentum Equation for VTOL-STOL Aircraft. NASA TN D-814, 1961. (N62-71388) (U)
274. Heyson, H. H.: Some Considerations in Wind-Tunnel Tests of V/STOL Models. NASA TM X-60772, 1967. (N68-13016) (U)
275. Heyson, H. H.: Wind-Tunnel Wall Effects at Extreme Force Coefficients. Annals of N.Y. Academy of Sci., Vol. 154, Art. 2, 1968. (U)
276. Hickey, D. H., and Hall, A. H.: Aerodynamic Characteristics of a Large-Scale Model with Two High Disk-Loading Fans Mounted in the Wing. NASA TN D-1650, 1963. (N63-13100) (U)
277. Hickey, D. H., and Cook, W. L.: Aerodynamics of V/STOL Aircraft Powered by Lift Fans. NASA TM X-60455, 1967. (N68-27435) (U)
278. Hickey, D. H., and Goldsmith, R. H.: Characteristics of Aircraft with Lifting-Fan Propulsion Systems for V/STOL. IAS Paper 63-27, 1963. (N63-12889) (U)
279. Hickey, D. H., and Cook, W. L.: Correlation of Wind-Tunnel and Flight-Test Aerodynamic Data for Five V/STOL Aircraft. AGARD Report 520, 1965. (N67-29536) (U)
280. Hickey, D. H.: Preliminary Investigation of the Characteristics of a Two-Dimensional Wing and Propeller with the Propeller Plane of Rotation in the Wing-Chord Plane. NASA RM A57F03, 1957. (U)

281. Hickey, D. H., and Ellis, D. R.: Wind-Tunnel Tests of a Semi-Span Wing with a Fan Rotating in the Plane of the Wing. NASA TN D-88, 1959. (U)
282. Hill, T. G.: Some Fundamentals for Efficient VTOL Aircraft Hover Control. American Helicopter Society Journal, Vol. 11, No. 1, Jan. 1966. (A66-23258) (U)
283. Hink, G. R., Gilbert, R. F., and Sundstrom, K. A.: General Method for Determining the Aerodynamic Characteristics of Fan-in-Wing Configurations. Vol. II. USAAVLABS TR-67-61B, Vol. 2, 1967. (AD-667981) (N68-26344) (U)
284. Hinz, E. R.: Stability and Control Characteristics of the Vertical-Attitude VTOL Aircraft. Canadian Aeronautical Institute - Institute of the Aeronautical Sciences Preprint 763, Canadian Aero. Journal, 1958. (U)
285. Hoehne, V. O., and Monical, R. E.: A Method of Design of Shrouded Propellers. Univ. of Wichita, Dept. of Eng. Research Report 213-8, 1959. (U)
286. Hoehne, V. O., and Wattson, R. K., Jr.: Shrouded-Propeller Investigations. Univ. of Wichita, Dept. of Eng. Research Reports 213-1-7, 9-11, 1958-60. (U)
287. Hoehne, V. O.: Shrouded-Propeller Investigations: Aerodynamic Characteristics of a Shroud with Centerbody. Univ. of Wichita, Dept. of Eng. Research Report 337, 1959. (U)
288. Hoffert, F.: The Dornier D031 Jet-Lift Concept, A Light Military Transport with VTOL Capability. SAE-864C, 1964. (U)
289. Holden, K. J.: The Effects of Introducing a Restoring Moment Proportional to Stick Velocity on the Hovering of an Unstabilized Jet-Lift Aircraft. Aeronautical Quarterly, Vol. 15, Feb. 1964. (A64-15303) (U)
290. Holladay, W. L., and Campbell, J. E.: VTOL Flight-Control Design Considerations for IFR Landings. Presented at AF V/STOL Technology and Planning Conf., Sept. 1969. (U)
291. Holzhauser, C. A., Innis, R. C., et al: A Flight and Simulator Study of the Handling Qualities of a Deflected-Slipstream STOL Seaplane Having Four Propellers and Boundary-Layer Control. NASA TN D-2966, 1965. (U)
292. Hough, G. R., and Kaskel, A. L.: A Comparison of Ducted-Propeller Theory with Bell X-22A Experimental Data. Therm Advanced Research Report TR-6510, 1965. (AD-480995) (X66-18702) (U)
293. Huang, K. P., Goland, L., et al: Charts for Estimating Aerodynamic Forces on STOL Aircraft Wings Immersed in Propeller Slipstreams. Dynasciences Corporation Report DCR-161, 1965. (AD-634722) (N66-34885) (U)
294. Huggett, D. J.: The Ground Effect on the Jet-Flap in Two Dimensions. ARC 19713, 1957. (AD-161226) (U)
295. Huston, R. J., and Winston, M. M.: Data from a Static-Thrust Investigation of a Large-Scale General Research VTOL-STOL Model in Ground Effect. NASA TN D-397, 1960. (AD-241018) (U)
296. Huston, R. J., Ward, J. F., and Winston, M. M.: Wing and Flap Loads Obtained from a Wind-Tunnel Investigation of a Large-Scale V/STOL Model. NASA TN D-1634, 1963. (U)
297. Iakovlevskii, O. V., and Krasheninnikov, S. I. U.: Propagation of a Turbulent Jet Colliding with a Flat Surface. Mekhanika Zhidkosti i Gaza, July-August 1966. (A66-41737) (U)
298. Illingworth, J. K. B., and Chinn, H. W.: Variable Stability and Control Tests on the S.C.1. Aircraft in Jet-Borne Flight, with Particular Reference to Desirable V.T.O.L. Flying Qualities. RAE TN Aero 2895, 1963. (AD-342066) (C) Title Unclassified
299. Illingworth, J. K. B., and Chinn, H. W.: Variable Stability and Control Tests on the S.C.1 Aircraft in Jet-Borne Flight, with Particular Reference to Desirable VTOL Flying Qualities. ARC R&M 3584, 1969. (AD-851181) (U)
300. Innis, R. C., and Quigley, H. C.: A Flight Examination of Operating Problems of V/STOL Aircraft in STOL-Type Landing and Approach. NASA TN D-862, 1961. (AD-257800) (U)
301. Isakson, G., and Buning, H.: A Study of Problems in the Flight Simulation of VTOL Aircraft. WADC TN-59-305, 1960. (U)
302. James, H. A., and Saunders, K. L.: Fan-in-Wing V/STOL Aircraft. Astronautics and Aerospace Eng., Vol. 1, June 1963. (N63-17562) (U)

303. James, H. A.: Generalized Characteristics of Vertifan Aircraft in the Fan Mode. *Annals of the N. Y. Academy of Sciences*, Vol. 107, Art. 1, 1963. (U)
304. James, H. A., Wingrove, R. C., et. al: Wind-Tunnel and Piloted-Flight-Simulator Investigation of a Deflected-Slipstream VTOL Airplane, the Ryan VZ-3RY. NASA TN D-89, 1959. (U)
305. Jeffrey, N. E.: A Simple Method for Predicting Propeller Aerodynamic Forces and Moment with Inflow Angles from 0° to 90° . Canadair Ltd. Report RAA 62-103, 1958. (U)
306. Johnson, A. E.: A Means of Improving the Static Performance of Cruise-Designed Shrouded Propellers. *Journal of the Aero Space Sciences*, August 1958. (U)
307. Johnson, A. E.: Wind-Tunnel Investigation of the Effects of Thrust, Shroud Length, and Shroud Camber on the Static Stability Characteristics of Shrouded Propellers. DTMB Aero 1073, 1964. (AD-601989) (U)
308. Johnston, G. W.: Recent Advances in STOL Aircraft Design and Operation. AIAA Paper 64-183, 1964. (U)
309. Johnston, J. F., and Friend, C. F.: Effect of Size on VTOL Aircraft Hover and Low-Speed Handling Qualities. 1st Nat. VTOL A/C Symposium, W-PAFB, Nov. 3-4, 1965. (A66-16813) (U)
310. Johnston, J. F., Culver, I. H., and Friend, C. F.: Study of Size Effects on VTOL Handling-Qualities Criteria. USAAVLABS TR-65-24, 1965. (AD-622578) (N66-11993) (U)
311. Jordinson, R.: Flow in a Jet Directed Normal to the Wind. ARC R&M 3074, 1956. (U)
312. Kakol, S. J.: Flight Tests of the First Dual-Tandem Ducted-Fan V/STOL. Soc. of Experimental Test Pilots Annual Report to the Aerospace Profession (Tenth), 1968. (U)
313. Kaplan, D. H.: Development of Quad Control for VTOL. Proceedings of the American Helicopter Soc. 15th Annual Nat'l Forum, 1959. (U)
314. Katzenberger, E. F., Ullisnik, H. D., and Adler, A.: Some Considerations of Direct-Lift V/STOL Aircraft. N. Y. Acad. of Sci. Annals, Vol. 107, Art. 1, 1963. (A63-14992) (U)
315. Kellar, R. P., and Green, D. C.: A Preliminary Analysis of the XV-4B VTOL Aircraft Computer Simulation. AFIT Report No. GAM/AE-68-4, 1968. (AD-838777) (U)
316. Kelley, H. L., and Champine, R. A.: Flight Operating Problems and Aerodynamic and Performance Characteristics of a Fixed-Wing, Tilt-Duct, VTOL Research Aircraft. NASA TN D-1802, 1963. (U)
317. Kelley, H. L.: Transition and Hovering Flight Characteristics of a Tilt-Duct VTOL Research Aircraft. NASA TN D-1491, 1962. (U)
318. Kelly, J. R., and Garren, J. F., Jr.: Study of the Optimum Values of Several Parameters Affecting Longitudinal Handling Qualities of VTOL Aircraft. NASA TN D-4624, 1968. (N68-28153) (U)
319. Kelly, M. W.: Analysis of Some Parameters Used in Correlating Blowing-Type Boundary-Layer Control Data. NACA RM A56F12, 1956. (U)
320. Kelly, M. W.: Large-Scale Wind-Tunnel Studies of Several VTOL Types. NASA Conference on V/STOL Aircraft, 1960. (U)
321. Kemper, E. H., et al: Design Study - CV-7A Transport Aircraft Modification to Provide an Augmentor-Wing Jet STOL Research Aircraft. North American Rockwell Rept., 1969. (N69-25291) (U)
322. Kerney, K. P.: An Asymptotic Theory of the High-Aspect-Ratio Jet Flap. Ph.D. Thesis, Cornell Univ., 68-881, 1967. (N69-12940) (U)
323. Key, D. L.: Study to Develop Equations of Motion Suitable for Analyses of VTOL Dynamics During Hover and Transition. CAL TB-2312-F, 1966. (U)
324. Key, D. L., and Reed, L. E.: VTOL Transition Dynamics and Equations of Motion with Application to the X-22A. CAL TB-2312-F-1, 1968. (AD-835996) (U)
325. Kind, R. J., and Maull, D. J.: An Experimental Investigation of a Low-Speed Circulation-Controlled Aerofoil. *Aeronautical Quarterly*, Vol. 19, 1968. (A68-31596) (U)

326. King, K. P., and McPherson, A.: A Piloted-Simulator Study of a Jet VTOL Aircraft in Partially Jet-Borne Flight. RAE TR-68301, 1968. (AD-856991) (U)
327. Kirby, R. H.: Aerodynamic Characteristics of Propeller-Driven VTOL Aircraft. NASA TN D-730, 1961. (N62-71304) (U)
328. Kirby, R. H., and Chambers, J. R.: Flight Investigation of Dynamic Stability and Control Characteristics of a 0.18-Scale Model of a Fan-in-Wing VTOL Airplane. NASA TN D-3412, 1966. (N66-32941) (U)
329. Kirby, R. H., Schade, R. O., and Tosti, L. P.: Force-Test Investigation of a 1/4-Scale Model of the Modified VZ-2 Aircraft. NASA TN D-2382, 1964. (N64-26773) (U)
330. Kirby, R. H.: Hovering and Transition Flight Tests of a Supersonic Fan-in-Fuselage VTOL Fighter Model. NASA TM X-424, 1961. (AD-324937) (C) Title Unclassified
331. Kirchner, E.: Testing Slipstream Deflection for VTO Transports (Cascades). Aviation Age, September 1955. (U)
332. Kirk, J. V., Hickey, D. H., and Hall, L. P.: Aerodynamic Characteristics of a Full-Scale Fan-in-Wing Model Including Results in Ground Effect with Nose-Fan Pitch Control. NASA TN D-2368, 1964. (U)
333. Kirk, J. V., and Hickey, D. H.: Full-Scale Wind-Tunnel Investigation of a VTOL Aircraft with a Jet-Ejector System for Lift Augmentation. NASA TN D-3725, 1966. (N67-32321) (U)
334. Kirk, J. V., Hodder, B. K., and Hall, L. P.: Large-Scale Wind-Tunnel Investigation of a V/STOL Transport Model with Wing-Mounted Lift Fans and Fuselage-Mounted Lift-Cruise Engines for Propulsion. NASA TN D-4233, 1967. (N67-40198) (U)
335. Kirk, J. V., Hickey, D. H., and Aoyagi, K.: Large-Scale Wind-Tunnel Investigation of a Model with an External Jet-Augmented Flap. NASA TN D-4278, 1967. (N68-11627) (U)
336. Kliner, W. J., and Craig, S. J.: Study of VTOL Control Requirements During Hovering and Low-Speed Flight Under IFR Conditions. IAS Paper 61-60, 1961. (A61-1639) (U)
337. Kline, S. J.: On the Nature of Stall. Stanford Univ. Dept. of Mech. Eng., Air Force Office of Scientific Research TN 58-637, 1958. (U)
338. Koch, J. J.: Summary of the VTOL State of the Art. American Helicopter Soc. Newsletter, Vol. 7, September 1961. (U)
339. Korbacher, G. K.: Jet-Flap Characteristics for High-Aspect-Ratio Wings. AIAA Journal, Vol. 2, No. 1, Jan. 1964. (U)
340. Korbacher, G. K.: The Jet Flap and STOL. Univ. of Toronto, Institute of Aerophysics, Decennial Symposium Proceedings, Part II, 1959. (U)
341. Korbacher, G. K.: Performance and Operation of Quasi, Two-Dimensional Jet Flaps. UTIA Rept. 90, 1963. (U)
342. Korbacher, G. K.: Performance, Operation, and Use of Low-Aspect-Ratio Jet-Flapped Wings. UTIAS Rept. 97, 1964. (AD-448444) (U)
343. Korbacher, G. K., and Sridhar, K.: A Review of Jet Flap. Univ. of Toronto, Institute of Aerophysics Review 14, 1960. (U)
344. Kraft, R. M., and Neville, R. W. F.: An Analysis of the Stick-Fixed Dynamic Stability of a Typical VTOL Aircraft During Transition Flight out of Ground Effect. Naval Post-Graduate School, 1965. (AD-475341) (U)
345. Krenz, G., and Barche, J.: Jet Influence on V/STOL Aircraft in the Transitional and High-Speed Flight Regime. AGARD CP-27, 1967. (N68-28852) (U)
346. Kriebel, A. R., and Mendenhall, M. R.: Predicted and Measured Performance of Two Full-Scale Ducted Propellers. NACA CR-578, 1966. (U)
347. Kriebel, A. R., Sacks, A. H., and Nielsen, J. N.: Theoretical Investigation of Dynamic Stability Derivatives of Ducted Propellers. Vidya TR 63-66, 1963. (U)
348. Kriebel, A. R.: Theoretical Investigation of Static Coefficients, Stability Derivatives, and Interference for Ducted Propellers. ITEK Report 112, 1964. (AD-602269) (U)
349. Kriebel, A. R.: Theoretical Stability Derivatives for a Ducted Propeller. AIAA Preprint 64-170, 1964. (U)

350. Kroeger, R. A., and Osborn, R. F.: Aerodynamic Analysis of High-Disc-Loading V/STOL Aircraft. Presented at AF V/STOL Technology and Planning Conf., Sept., 1969. (U)
351. Kroll, J., Jr.: Initial VTOL Flight-Control Design Criteria Development – Discussion of Selected Handling-Qualities Topics; First Yearly Report. CAL Rept. BB-2249-F-1, 1967. (AD-825471) (U)
352. Kroll, J., Jr.: VTOL Flying-Qualities Bibliography. CAL Rept. FDM-407, 1968. (AD-829747L) (X68-17203) (U)
353. Kruger, W.: On Wind-Tunnel Tests and Computations Concerning the Problem of Shroud Propellers. NACA TM 1202, 1944. (U)
354. Kuhn, R. E., and Draper, J. W.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angle of Attack up to 90° . NACA TR 1263, 1956. (U)
355. Kuhn, R. E., and Draper, J. W.: Investigation of Effectiveness of Large-Chord Slotted Flaps in Deflecting Propeller Slipstreams Downward for Vertical Take-Off and Low-Speed Flight. NACA TN 3364, 1955. (U)
356. Kuhn, R. E.: Investigation of Effectiveness of a Wing Equipped with a 50-Percent-Chord Sliding Flap, a 30-Percent-Chord Slotted Flap, and a 30-Percent-Chord Slat in Deflecting Propeller Slipstreams Downward for Vertical Take-Off. NACA TN 3919, 1959. (U)
357. Kuhn, R. E.: Investigation of the Effects of Ground Proximity and Propeller Position on the Effectiveness of a Wing with Large-Chord Slotted Flaps in Redirecting Propeller Slipstreams Downward for Vertical Take-Off. NACA TN 3629, 1956. (U)
358. Kuhn, R. E., and Draper, J. W.: An Investigation of a Wing-Propeller Configuration Employing Large-Chord Plain Flaps and Large-Diameter Propellers for Low-Speed Flight and Vertical Take-Off. NACA TN 3307, 1954. (U)
359. Kuhn, R. E.: Investigation at Zero Forward Speed of a Leading-Edge Slat as a Longitudinal-Control Device for Vertically-Rising Airplanes that Utilize the Redirecting-Slipstream Principle. NACA TN 3692, 1956. (U)
360. Kuhn, R. E., and Grunwald, K. J.: Lateral Stability and Control Characteristics of a Four-Propeller Deflected-Slipstream VTOL Model Including the Effects of Ground Proximity. NASA TN D-444, 1961. (AD-250017) (U)
361. Kuhn, R. E., and Grunwald, K. J.: Longitudinal Aerodynamic Characteristics of a Four-Propeller Deflected-Slipstream VTOL Model Including the Effects of Ground Proximity. NASA TN D-248, 1960. (U)
362. Kuhn, R. E., and McKinney, M. O., Jr.: NASA Research on the Aerodynamics of Jet-VTOL Engine Installation. NASA TM X-56820, 1965. (N65-34998) (U)
363. Kuhn, R. E., and Spreemann, K. P.: Preliminary Investigation of the Effectiveness of a Sliding Flap in Deflecting a Propeller Slipstream Downward for Vertical Take-Off. NACA TN 3693, 1956. (U)
364. Kuhn, R. E.: Review of Basic Principles of V/STOL Aerodynamics. NASA TN D-733, 1961. (N62-71307) (U)
365. Kuhn, R. E.: Semiempirical Procedure for Estimating Lift and Drag Characteristics of Propeller-Wing-Flap Configurations for Vertical- and Short-Take-Off-and-Landing Airplanes. NASA Memo 1-16-59L, 1959. (U)
366. Kuhn, R. E., and Naeseth, R. L.: Tunnel-Wall Effects Associated with VTOL/STOL Model Testing. AGARD Rept. 303, 1959. (N62-15912) (U)
367. Kuhn, R. E., and Hayes, W. C.: Wind-Tunnel Investigation of Effect of Propeller Slipstream on Aerodynamic Characteristics of a Wing Equipped with a 50-Percent-Chord Sliding Flap and a 30-Percent-Chord Slotted Flap. NACA TN 3918, 1957. (U)
368. Kuhn, R. E., and Hayes, W. C.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of Three Propeller-Driven VTOL Configurations in the Transition Speed Range; Including Effects of Ground Proximity. NASA TN D-55, 1960. (U)
369. Kurata, T., Ohara, N., et al: Dynamic Stability Tests of V/STOL Model. Mitsubishi Technical Review, Vol. 5, No. 5, 1968. (A69-17091) (U)
370. Kutyna, D. J.: Low-Speed Aerodynamic Characteristics of Jet-VTOL Aircraft at Angles of Attack. MIT M.S. Thesis, 1966. (AD-620442) (N66-11330) (U)

371. LaPlant, P. C., and Baldwin, R. L.: Flight Evaluation of the XV-5A V/STOL Aircraft. AFFTC-TR-66-30, 1967. (AD-810922) (X67-18167) (U)
372. Lasbrey, I. K. B.: Lift Compensation in the S.C.-1. Control, Vol. 5, February 1962. (U)
373. Laschka, B., Mueller, A., and Ebeling, P.: A Contribution on the Determination of Overall Forces of Inclined Propellers. AGARD CP-22, 1967. (N68-22490) (U)
374. Lavi, R., Hall, G. R., and Stark, W. W.: Full-Scale Ground-Proximity Investigation of a VTOL Fighter Model Aircraft. NASA CR-1098, 1968. (N68-28233) (U)
375. Lavi, R.: Parametric Investigation of VTOL Hot-Gas Ingestion and Induced-Jet Effects in Ground Proximity. Northrop Corp., NOR-67-32, 1967. (AD-809224) (U)
376. Lecomte, P. E.: Recent French Experience in the Field of V/STOL Aircraft. SAE Paper 670B, 1963. (U)
377. Levinsky, E. S., Thommen, H. U., et al: Lifting-Surface Theory and Tail-Downwash Calculations for V/STOL Aircraft in Transition and Cruise – Final Report. USAAVLABS TR-68-67, 1968. (AD-680969) (N69-20533) (U)
378. Lissaman, P. B. S.: Design Data for the Jet Flap in Ground Effect. Jour. of Aircraft, Vol. 4, No. 6, 1967. (U)
379. Lissaman, P. B. S.: A Linear Theory for Jet Flap in Ground Effect. AIAA Paper 67-2, 1967. (A68-36681) (U)
380. Lo, C. F., and Binion, T. W., Jr.: A V/STOL Wind-Tunnel-Wall Interference Study. AIAA Paper 69-171, 1969. (U)
381. Lockwood, V. E., Turner, T. R., and Riebs, J. M.: Wind-Tunnel Investigation of Jet-Augmented Flaps on a Rectangular Wing to High Momentum Coefficients. NACA TN 3865, 1956. (U)
382. Lollar, T. E., Bus, F. J., and Dolliver, D. M.: Control Requirements and Control Methods for Large V/STOL Aircraft. SAE Paper 650808, 1965. (A65-34838) (U)
383. Lollar, T. E.: A Rationale for the Determination of Certain VTOL Handling-Qualities Criteria. AGARD Report 471, 1963. (N64-19854) (U)
384. Lollar, T. E., and Kriechbaum, G. K. L.: VTOL Handling-Qualities Criteria and Control Requirements. Analysis and Experiments. Am. Heli. Soc. Jour., Vol. 13, 1968. (A68-37051) (U)
385. Longhurst, W. S.: A Report on Stability and Control Testing of a Tilt-Wing V/STOL Aircraft. SAE Paper 660315, 1966. (U)
386. Lovell, P. M., Jr., and Parlett, L. P.: Effects of Wing Position and Vertical-Tail Configuration on Stability and Control Characteristics of a Jet-Powered Delta-Wing Vertically-Rising Aircraft Model. NACA TN 3899, 1957. (U)
387. Lovell, P. M., Jr., and Parlett, L. P.: Flight Tests of a Model of a High-Wing Transport Vertical Take-Off Aeroplane with Tilting Wing and Propellers and with Jet Controls at the Rear of the Fuselage for Pitch and Yaw Control. NACA TN 3912, 1957. (U)
388. Lovell, P. M., Jr., and Parlett, L. P.: Hovering-Flight Tests of a Model of a Transport Vertical-Take-Off Airplane with Tilting Wing and Propellers. NACA TN 3630, 1956. (U)
389. Lovell, P. M., Jr., and Parlett, L. P.: Transition-Flight Tests of a Model of a Low-Wing Transport Vertical-Take-Off Airplane with Tilting Wing and Propellers. NACA TN 3745, 1956. (U)
390. Lowry, J. G., Riebs, J. M., and Campbell, J. P.: The Jet-Augmented Flap. Preprint No. 715, S.M.F. Fund Paper, Inst. Aero. Sci., January 1957. (U)
391. Lowry, J. G., and Vogler, R. D.: Wind-Tunnel Investigation at Low Speeds to Determine the Effect of Aspect Ratio and End Plates on a Rectangular Wing with Jet Flaps Deflected 85° . NACA TN 3863, 1956. (U)
392. Ludwig, G. R.: An Investigation of the Flow in Uniform and Nonuniform Jets Impinging Normally on a Flat Surface. AIAA Paper 64-796, 1964. (A64-26517) (U)
393. Madden, J., Kroll, J., and Neil, D.: A Study of V/STOL Flying-Qualities Requirements. Bell Aerosystems Report No. 2023-017001, 1960. (AD-245368) (U)

394. Maguire, W. B.: A Wind-Tunnel Investigation of Some Short-Chord Low-Solidity Shrouded Propellers in the Cruise Condition. DTMB Aero-1083, 1964. (AD-612184) (U)
395. Maki, R. L., and Giulianetti, D. J.: Aerodynamic Stability and Control of Ducted-Propeller Aircraft. Conf. on V/STOL and STOL Aircraft, 1966. (N66-24615) (U)
396. Maki, R. L., and Hickey, D. H.: Aerodynamics of a Fan-in-Fuselage Model. NASA TN D-789, 1961. (AD-256074) (N62-71363) (U)
397. Margason, R. J., and Gentry, G. L., Jr.: Aerodynamic Characteristics of a Five-Jet VTOL Configuration in the Transition Speed Range. NASA TN D-4812, 1968. (N68-36081) (U)
398. Margason, R. J.: Jet-Induced Effects in Transition Flight. NASA SP-116, 1966. (N66-24619) (U)
399. Margason, R. J., Hammond, A. D., et al: Longitudinal Stability and Control Characteristics of a Powered Model of a Twin-Propeller Deflected-Slipstream STOL Airplane Configuration. NASA TN D-3438, 1966. (U)
400. Margason, R. J.: The Path of a Jet Directed at Large Angles to a Subsonic Free Stream. NASA TN D-4919, 1968. (N69-11634) (U)
401. Martin, E. E.: The Lift Produced by a Wing-Mounted Lift Fan at Flight Speeds Below Transition. American Helicopter Society, Vol. 9, April 1964. (A64-17610) (U)
402. Martin, J. F., and Michaelsen, O. E.: The Aerodynamic Approach to Improved Flying Qualities of Tilt-Wing Aircraft. AIAA/CASI/RAeS Paper 63-484, 1963. (A63-24595) (U)
403. Martin, J. F.: Investigation of Longitudinal Handling-Qualities Requirements and the Development of Piloting Techniques for Tilt-Wing V/STOL Aircraft in Normal and Emergency Conditions. AIAA, 1963. (A63-20569) (U)
404. Matsuoka, K., Takahashi, M., and Yonezawa, M.: Aerodynamic Characteristics of Propeller-Wing-Flap Systems. Osaka Univ., Eng. and Natural Sci. Bulletin, Series A, Vol. 17, No. 1, 1968. (A69-22278) (U)
405. McCormick, B. W.: Aerodynamics of V/STOL Flight. Academic Press, New York, 1967. (U)
406. McEachern, N. V., and Currie, M. M.: A Vortex-Lattice Lifting-Surface Theory for Wings with Submerged Fans. NRL LR-311 or NRC Rept. 6480, 1961. (AD-266780) (U)
407. McGregor, D. M.: A Flight Investigation of the Influence of Various Levels of Dihedral Effect on V/STOL Aircraft Directional Handling Qualities. NRC LR-412, NRCC 8281, 1964. (AD-461879) (U)
408. McGregor, D. M.: A Flight Investigation of Various Stability-Augmentation Systems for a Jet-Lift V/STOL Aircraft (Hawker-Siddeley P1127) Using an Airborne Simulator. NAE-LR-500, 1968. (AD-675766) (U)
409. McGregor, D. M.: The Influence of Aircraft Size on Control-Power and Control-Sensitivity Requirements. NAE-LR-459, 1966. (AD-805418) (U)
410. McGregor, D. M.: An Investigation of the Effects of a Lateral-Directional Control Cross-Coupling on Flying Qualities Using a V/STOL Airborne Simulator. NRC LR-390, NRCC 7778, 1963. (AD-428236) (U)
411. McGregor, D. M.: Simulation of the Canadair CL-84 Tilt-Wing Aircraft Using an Airborne V/STOL Simulator. NRC LR-435, 1965. (U)
412. McIntyre, W.: Simulation of Helicopter and V/STOL Aircraft. Vol. II - V/STOL Analysis Report. Study, Equations of Motion of Vertical/Short Take-Off and Landing Operational-Flight/Weapon System Trainers. NAVTRADEVCEEN 1205-2, 1963. (AD-602427) (N64-21244) (U)
413. McKinney, M. O., Jr., Kirby, R. H., and Newsom, W. A.: Aerodynamic Factors to Be Considered in the Design of Tilt-Wing V/STOL Airplanes. Annals of the N. Y. Academy of Sciences, Vol. 107, Art. I, 1963. (U)
414. McKinney, M. O., Jr., Kuhn, R. E., and Reeder, J. P.: Aerodynamic and Flying Qualities of Jet V/STOL Airplanes. SAE-864A, 1964. (N64-23378) (U)
415. McKinney, M. O., Jr., Parlett, L. P., and Newsom, W. A., Jr.: An Approach to Efficient Low-Speed Flight for Fan-Powered Aircraft. NASA SP-116, 1966. (N66-24616) (U)

416. McKinney, M. O., Tosti, L. P., and Davenport, E. E.: Dynamic Stability and Control Characteristics of a Cascade-Wing Vertically-Rising Airplane Model in Take-Offs, Landings, and Hovering Flight. NACA TN 3198, 1954. (U)
417. McKinney, M. O., Jr.: Dynamic Tests of V/STOL Transport Models. NASA TM X-51790, 1965. (N65-22183) (U)
418. McKinney, M. O., and Newsom, W. A.: Experimental Research on 4-Duct Tandem VTOL Aircraft Configurations. American Helicopter Society Paper, 1962. (N62-11441) (U)
419. McKinney, M. O., and Newsom, W. A.: Fan V/STOL Aircraft. NASA TM X-59739, 1967. (N68-25278) (U)
420. McKinney, M. O.: Low-Speed Wind-Tunnel Investigation of a Wingless Jet VTOL Transport Model. NASA TN D-57, 1959. (U)
421. McKinzie, G. A., Bradfield, E. N., Jr., et al: P-1127 (XV-6A) V/STOL Handling-Qualities Evaluation. AFFTC-TR-68-10, 1968. (AD-839849) (U)
422. McLemore, H. C., and Peterson, J. B., Jr.: Aerodynamic Characteristics of a Large-Scale Unswept Wing-Body-Tail Configuration with Blowing Applied Over the Flap and Wing Leading Edge. NASA TN D-407, 1960. (U)
423. McLemore, H. C., and Cannon, M. D.: Aerodynamic Investigation of a Four-Blade Propeller Operating Through an Angle-of-Attack Range From 0° to 180° . NACA TN 3228, 1954. (U)
424. McLemore, H. C.: Jet-Induced Lift Loss of Jet VTOL Configurations in Hovering Condition. NASA TN D-3435, 1966. (U)
425. McWherter, R. C.: VTOL Wind-Tunnel Testing Techniques and Facilities. SAE Paper 370A, 1961. (A62-8744) (U)
426. Meagher, G., and Billington, I. J.: Canada's Entry in the New Family of Large Wind Tunnels for V/STOL Aircraft Development. Engineering Inst. of Canada, Congress of Canadian Engineers, May-June 1967. (A68-12525) (U)
427. Mertaugh, L. J., Jr., and Davidson, J. K.: Analysis of a Follow-On Low-Speed Wind-Tunnel Test of a High-Mass-Rate Vectored-Propulsion Flare Model. LTV Rept. 2-53310/5R-2206, 1965. (AD-619578) (N65-34528) (U)
428. Mertaugh, L. J., Jr.: Data Report for LTV Low-Speed Wind-Tunnel-Test Number 172. Test of High-Mass-Rate Vectored-Propulsion Flow Model. LTV 2-53310/5R-2172, 1965. (AD-612927) (U)
429. Michaels, J. L.: Study and Evaluation of V/STOL Ground-Based Simulation Techniques for the X-22A Aircraft. Bell Aerosystems, TR BA-7356-927001, USAAVLABS TR-69-40, 1969. (AD-859290) (U)
430. Michaelson, O. E.: The CL-84 V/STOL Flight Simulation — A Comparison With Reality. ICAS Paper 66-18, 1966. (A66-42493) (U)
431. Miller, D. P., and Vinje, E. W.: Fixed-Base Flight-Simulator Studies of VTOL Aircraft Handling Qualities in Hovering and Low-Speed Flight. AFFDL TR-67-152, 1968. (AD-831446) (U)
432. Mitchell, R. G.: Full-Scale Wind-Tunnel Test of the VZ-2 VTOL Airplane With Particular Reference to the Wing-Stall Phenomena. NASA TN D-2013, 1963. (N64-11550) (U)
433. Miyai, Y., and Kida, T.: An Approximate-Calculating Method of the Flow for a Thin Jet-Flapped Wing With a Small Deflection Angle in Proximity of the Ground. Japan Soc. for Aero. & Space Sci., Transactions, Vol. 9, No. 15, 1966. (A67-29308) (U)
434. Monical, R. E.: A Method of Representing Fan-Wing Combinations for Three-Dimensional Potential-Flow Solutions. Jour. of Aircraft, Vol. 2, No. 6, 1965. (U)
435. Morel, J. P., and Lissaman, P.B.S.: The Jet-Flap Diffuser: A New Thrust Augmenting Device. AIAA Paper 69-777, 1969. (U)
436. Mort, K. W., and Yaggy, P. F.: Aerodynamic Characteristics of a 4-Foot Diameter Ducted-Fan Mounted on the Tip of a Semispan Wing. NASA TN D-1301, 1962. (N62-11045) (U)
437. Mort, K. W., and Yaggy, P. F.: Aerodynamic Characteristics of a Full-Scale Propeller Tested with Both Rigid and Flapping Blades and with Cyclic Pitch Control. NASA TN D-1774, 1963. (U)
438. Mort, K. W., and Gamse, B.: A Wind-Tunnel Investigation of a 7-Foot-Diameter Ducted Propeller. NASA TN D-4142, 1967. (U)

439. Moser, H. H., and Livingston, C. L.: Experimental and Analytical Study of the Ducted Fan and Fan-in-Wing in Hovering and Forward Flight. MIT TR 79-1, 1959. (AD-213316) (U)
440. Murphy, R. D.: Wind-Tunnel Boundary Effects Studies for VTOL/STOL Data Using a Four-Propeller, Ducted-Fan, Generalized Transport Design. DTMB Test AL-4, 1966. (AD-480760L) (U)
441. Murphy, R. D.: Wind-Tunnel Tests of a 1/16-Scale Model of a Rotorable-Wing Seaplane. Part III. Analysis of the Test Data. DTMB Aero. Report 902, 1960. (U)
442. Neal, B.: The Design and Testing of Three 6-Foot-Diameter Ducted Propellers With Their Rotational Axes Normal to the Free Stream. NRCC 8483, LR-426, 1965. (AD-464741) (U)
443. Neal, B.: The Static and Forward-Speed Testing of a Flapped Wing With Boundary-Layer Control for Use in Deflecting Propeller Slipstreams Downward for Vertical Take-off. Part 2. Tests at Incidence and Ground-Proximity Effects. NRC LR-383, 1963. (AD-417969) (U)
444. Neal, B., and Slack, W. E.: Static and Forward-Speed Tests on Several Six-Foot-Diameter Tractor and Pusher Ducted Propellers. NRC LR-445, 1965. (AD-482539) (U)
445. Newsom, W. A., Jr.: Aerodynamic Characteristics of a Four-Duct Tandem VTOL-Aircraft Configuration. NASA TN D-1481, 1963. (U)
446. Newsom, W. A., Jr.: Effect of Ground Proximity on the Aerodynamic Characteristics of a Four-Engine Vertical-Take-Off-and-Landing Transport Aircraft Model with Tilting Wing and Propellers. NACA TN 4124, 1957. (U)
447. Newsom, W. A., Jr.: Effect of Ground Proximity on Aerodynamic Characteristics of Two Horizontal-Attitude Jet Vertical-Take-Off-and-Landing Airplane Models. NACA RM L57G16, 1957. (U)
448. Newsom, W. A., Jr.: Effects of Ground Proximity on Aerodynamic Characteristics of Two Horizontal-Attitude Jet Vertical-Take-Off-and-Landing Airplane Models. NASA TN D-419, 1960. (AD-144809) (U)
449. Newsom, W. A., Jr.: Effect of Propeller Location and Flap Deflection on the Aerodynamic Characteristics of a Wing-Propeller Combination for Angles of Attack from 0° to 80° . NACA TN 3917, 1957. (U)
450. Newsom, W. A., Jr.: Experimental Investigation of the Lateral Trim of a Wing-Propeller Combination at Angles of Attack up to 90° with All Propellers Turning in the Same Direction. NACA TN 4190, 1958. (U)
451. Newsom, W. A., Jr.: Flight Investigation of the Longitudinal and Control Characteristics of a Four-Propeller Tilt-Wing VTOL Model with a Programmed Flap. NASA TN D-1390, 1962. (U)
452. Newsom, W. A., Jr., and Kirby, R. H.: Flight Investigation of Stability and Control Characteristics of a 1/9-Scale Model of a Four-Propeller Tilt-Wing V/STOL Transport. NASA TN D-2443, 1964. (U)
453. Newsom, W. A., Jr., and Freeman, D. C., Jr.: Flight Investigation of Stability and Control Characteristics of a 0.18-Scale Model of a Four-Duct Tandem V/STOL Transport. NASA TN D-3055, 1966. (U)
454. Newsom, W. A., Jr.: Force-Test Investigation of the Stability and Control Characteristics of a Four-Propeller Tilt-Wing VTOL Model with a Programmed Flap. NASA TN D-1389, 1962. (U)
455. Newsom, W. A., Jr., and Tosti, L. P.: Force-Test Investigation of the Stability and Control Characteristics of a 1/4-Scale Model of a Tilt-Wing Vertical-Take-Off-and-Landing Aircraft. NASA Memo 11-3-58L, 1958. (AD-208821) (U)
456. Newsom, W. A., Jr., and Tosti, L. P.: Slipstream Flow Around Several Tilt-Wing VTOL Aircraft Models Operating Near the Ground. NASA TN D-1382, 1962. (U)
457. Newsom, W. A., Jr.: Wind-Tunnel Investigation of a Deflected-Slipstream Cruise-Fan V/STOL Aircraft Wing. NASA TN D-4262, 1967. (N68-11036) (U)
458. Nicholson, R., and Lowry, R. B.: XV-4A VTOL-Research-Aircraft Program. USAAVLABS TR-66-45, 1966. (AD-635106) (U)
459. Norland, S. A.: An Investigation of the Lift Produced by a Fan in a Two-Dimensional Wing. American Helicopter Society Jour. Vol. 7, Oct. 1962. (A63-10240) (U)
460. Notess, C. B., and Whitcomb, D. W.: A Review and Study of Flying Qualities to Aid Design of a Variable Stability VTOL Aircraft. CAL-TE-1865-F-2, 1963. (AD-816032) (U)

461. Olcott, J. W.: A Survey of V/STOL Wind-Tunnel Wall Corrections and Test Techniques. Princeton Univ. Aerospace and Mechanical Science Report 725, 1965. (N66-30290) (U)
462. O'Malley, J. A., Jr.: Problems of Stability and Control for VTOL Aircraft. IAS Preprint 729, 1957. (U)
463. Ordway, D. E., Sluyter, M. M., and Sonnerup, B. O. U.: Three-Dimensional Theory of Ducted Propellers. Therm Advanced Research TAR-TR-602, 1960. (AD-245846) (U)
464. Otis, J. H., Jr.: Induced Interference Effects on a Four-Jet VTOL Configuration with Various Wing Planforms in the Transition Speed Range. NASA TN D-1400, 1962. (N62-15319) (U)
465. Page, V. R., Dickinson, S. O., and Deckart, W. H.: Large-Scale Wind-Tunnel Tests of a Deflected-Slipstream STOL Model With Wings of Various Aspect Ratio. NASA TN D-4448, 1968. (N68-18771) (U)
466. Page, V. R., and Soderman, P. T.: Wing Surface Pressure Data From Large-Scale Wind-Tunnel Tests of a Propeller-Driven STOL Model. NASA TM X-1527, 1968. (N68-19065) (U)
467. Parlett, L. P.: Aerodynamic Characteristics of a Small-Scale Shrouded Propeller at Angles of Attack from 0° to 90° . NACA TN 3547, 1955. (U)
468. Parlett, L. P.: Experimental Investigation of Some of the Parameters Related to the Stability and Control of Aerial Vehicles Supported by Ducted Fans. NASA TN D-616, 1960. (U)
469. Parlett, L. P.: Stability and Control Characteristics of a Model of an Aerial Vehicle Supported by Four Ducted Fans. NASA TN D-937, 1961. (U)
470. Parlett, L. P.: Stability and Control Characteristics of a Small-Scale Model of an Aerial Vehicle Supported by Two Ducted Fans. NASA TN D-920, 1961. (AD-260541) (U)
471. Parlett, L. P., and Kirby, R. M.: Test Techniques Used by NASA for Investigating Dynamic Stability Characteristics of V/STOL Models. AIAA, 1964. (A64-14526) (U)
472. Parlett, L. P.: Wind-Tunnel Investigation of a Small-Scale Model of an Aerial Vehicle Supported by Ducted Fans. NASA TN D-377, 1960. (U)
473. Parlett, L. P., and Shivers, J. P.: Wind-Tunnel Investigation of an STOL Aircraft Configuration Equipped With an External-Flow Jet Flap. NASA TN D-5364, 1969. (N69-33275) (U)
474. Patierno, J., and Isca, J. A.: Instrument Flight-Simulator Study of the VTOL Controllability Control-Power Relationship. Aerospace Eng., Vol. 21, 1962. (U)
475. Paxhia, V. B., and Sing, E. Y.: Design and Development of a Dual-Tandem Ducted-Propeller VTOL Aircraft. IAS Paper 63-30, 1963. (U)
476. Payne, H. E., III.: Application of Small-Scale Propeller Test Data to V/STOL Aircraft Design. Princeton Univ. Report 503, 1961. (AD-270110) (U)
477. Payne, H. E., III.: Propeller Effects on the Stability and Control of VTOL Aircraft. Aerospace Eng., March 1960. (U)
478. Payne, H. E., III, and Cromwell, C. H., III: A Stability Analysis of Tilt-Wing Aircraft (Experimental). Princeton Univ. Report 478, 1960. (U)
479. Peake, D. J.: The Pressures on a Surface Surrounding a Jet Issuing Normal to a Mainstream. NRL Report LR-410, 1964. (AD-463295) (U)
480. Pegg, R. J., Kelley, H. L., and Reeder, J. P.: Flight Investigation of VZ-2 Tilt-Wing Aircraft With Full-Span Flap. NASA TN D-2680, 1965. (N65-18211) (U)
481. Pegg, R. J.: Flight-Test Investigation of Ailerons as a Source of Yaw Control on the VZ-2 Tilt-Wing Aircraft. NASA TN D-1375, 1962. (U)
482. Pegg, R. J.: Summary of Flight-Test Results of the VZ-2 Tilt-Wing Aircraft. NASA TN D-989, 1962. (U)
483. Perry, D. H., and Chinn, H. W.: A Preliminary Flight-Simulation Study of Jet-Borne VTOL Aircraft Handling Qualities. ARC CP-902, 1965. (AD-809892) (N67-24038) (U)

484. Peterson, J. M.: Lift-Fan V/STOL Concept for Future Applications. *Jour. of Aircraft*, Mar-Apr. 1965. (U)
485. Pitkin, M.: Free-Flight-Tunnel Investigation of the Effect of Mode of Propeller Rotation Upon the Lateral-Stability Characteristics of a Twin-Engine Airplane Model With Single Vertical Tails of Different Size. NACA WR L-354, 1943. (U)
486. Pivko, S.: The Annular Aerofoil with Central Body and Propeller. *Aircraft Eng.*, Vol. 29, No. 345, 1957. (U)
487. Pivko, S.: Predicting the Performance of Jet-Flap Configurations. *Semiempirical Theory and Comparison With Available Test Results. Aircraft Engineering*, Jan. 1962. (U)
488. Plaskowski, Z.: Annular Airfoils. Report given at 4th International Astronautical Congress, Zurich, Switzerland, 1953. (U)
489. Platt, R. J., Jr.: Static Tests of Four Two-Blade NACA Propellers Differing in Camber and Solidity. NACA RM L8H25a, 1948. (U)
490. Platt, R. J., Jr.: Static Tests of a Shrouded and an Unshrouded Propeller. NACA RM L7H25, 1948. (U)
491. Pokorny, V.: The Effects of Nonlinearities in Lift and Pitching-Moment Curves on Longitudinal Motion of an Aircraft. *Zprava Vzlu*, Dec. 1964. (A66-26285) (U)
492. Pruyn, R. A.: Effects of Airframe Geometry on Downwash Problems of Tandem Ducted-Propeller VTOL Aircraft. Kellett Aircraft Corporation Report 179T80-6, 1964. (AD-452792) (U)
493. Przedpelski, Z. J.: Results of Wind-Tunnel Tests of a Full-Scale Fuselage-Mounted Tip-Turbine-Driven Lift Fan, Vol. 3. General Electric Company, TREC TR 61-15, 1962. (AD-275711) (N62-12414) (U)
494. Putman, W. F.: An Experimental Investigation of Ground Effect on a Four-Propeller Tilt-Wing V/STOL Model. USAAVLABS TR-68-45, 1968. (AD-673824) (U)
495. Putman, W. F., Traybar, J. J., et al: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 1, Phase I; Hovering. Princeton Univ. Report 835, USAAVLABS TR-68-49A, 1968. (AD-679134) (N69-17670) (U)
496. Putman, W. F., and Traybar, J. J.: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 2, Phase II, Longitudinal Dynamics at High Duct Incidence Data Report. Princeton Univ. Report 836, USAAVLABS TR-68-49B, 1968. (AD-676861) (N69-13715) (U)
497. Putman, W. F., Traybar, J. J., et al: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 3, Final Data Report, Phase 3, Lateral/Directional Dynamics at High Duct Incidences. USAAVLABS TR-68-49C, 1968. (AD-682749) (N69-25070) (U)
498. Putman, W. F.: An Investigation of the Lateral-Directional Dynamic Stability Characteristics of a Tilt-Wing V/STOL Transport Model in Simulated Low-Speed Descending Flight. USAAVLABS TR-69-46, 1969. (AD-859807) (U)
499. Putman, W. F.: Results of Experiments on a Tilt-Wing VTOL Aircraft Using the Princeton University Forward Flight Facility. Princeton Univ. Rept. 542, 1961. (AD-270217) (U)
500. Quigley, H. C., Innis, R. C., and Holzhauser, C. A.: A Flight Investigation of the Performance, Handling Qualities, and Operational Characteristics of a Deflected-Slipstream STOL Transport Airplane Having Four Interconnected Propellers. NASA TN D-2231, 1964. (U)
501. Quigley, H. C., Innis, R. C., et al: A Flight and Simulator Study of Directional Augmentation Criteria for a Four-Propellered STOL Airplane. NASA TN D-3909, 1967. (N67-24619) (U)
502. Quigley, H. C., and Innis, R. C.: Handling Qualities and Operational Problems of a Large Four-Propeller STOL Transport Airplane. NASA TN D-1647, 1963. (N63-12247) (U)
503. Quigley, H. C., and Lawson, H. F., Jr.: Simulator Study of the Lateral-Directional Handling Qualities of a Large Four-Propellered STOL Transport Airplane. NASA TN D-1773, 1963. (U)
504. Ramnath, R. V.: Transition Dynamics of VTOL Aircraft. AIAA Paper 69-130, 1969. (A69-18157) (U)
505. Rampy, J. M.: Important V/STOL Aircraft Stability Derivatives in Hover and Transition. AFFTC-TR-66-29, 1966. (AD-641371) (N67-17673) (U)

506. Reeder, J. P.: Handling-Qualities Experience with Several VTOL Research Aircraft. NASA TN D-735, 1961. (U)
507. Reichert, J. B., and Ulyate, J. R.: Final Report Doak Model 16. Doak Aircraft Company Rept. DS-215, 1960. (U)
508. Rethorst, S., Royce, W. W., et al: Development of Methods for Predicting V/STOL Aircraft Characteristics. VRC Rept 5, 1961. (AD-244736) (U)
509. Rethorst, S., Royce, W. W., and Wu, Y.: Lift Characteristics of Wings Extended Through Propeller Slipstreams. VRC Rept 1., 1958. (PB-146592) (U)
510. Rethorst, S., and Royce, W. W.: Lifting Systems for VTOL Vehicles. VRC Rept. 2; IAS Paper 59-123, 1959. (U)
511. Ribner, H. S.: On the Lift and Induced Drag Associated with Large Downwash Angles. Univ. of Toronto, Institute of Aerophysics, TN 19, 1958. (U)
512. Ribner, H. S.: Propellers in Yaw. NACA TR 820, 1945. (U)
513. Ribner, H. S.: The Ring Airfoil in Non-Axial Flow. Jour. Aero. Sci., Vol. 14, No. 9, 1947. (U)
514. Ribner, H. S.: Theory of Wings in Slipstreams. Univ. of Toronto, Institute of Aerophysics, Rept. 60, 1959. (U)
515. Ricard G., Czinczenheim, J., et al: The Breguet Family of STOL Aircraft. SAE Preprint 428A, 1961. (U)
516. Riebe, J. M.: A Correlation of Two-Dimensional Data on Lift Coefficient Available with Blowing-, Suction-, and Plain-Flap High-Lift Devices. NACA RM L55D29a, 1955. (U)
517. Robertson, J. L.: Exploratory Full-Scale Ground and Flight-Test Evaluation of the Robertson Ultra-Low-Speed Flight-Control System. Skycraft Inc. TCREC TR 62-23, 1962. (AD-282123) (U)
518. Robinson, D. W., Jr.: Design Consideration for a Propeller-Driven VTOL. Jour. of American Helicopter Soc., January 1959. (U)
519. Rogallo, F. M., and Swanson, R. S.: Wind-Tunnel Tests of a Twin-Engine Model to Determine the Effect of Propeller Rotation of the Static-Stability Characteristics. NACA WR L-295, 1943. (U)
520. Rolls, L. S.: Characteristics of a Deflected-Jet VTOL Aircraft. NASA Conference on V/STOL Aircraft, 1960. (U)
521. Rolls, L. S., Drinkwater, F. J., III, and Innis, R. C.: Effects of Lateral-Control Characteristics on Hovering a Jet-Lift VTOL Aircraft. NASA TN D-2701, 1965. (U)
522. Rolls, L. S., and Drinkwater, F. J., III.: A Flight Determination of the Attitude Control Power and Damping Requirements of a Visual Hovering Task in the Variable Stability and Control X-14A Research Vehicle. NASA TN D-1328, 1962. (U)
523. Rosenthal, G., et al: Aircraft Preliminary-Design Report V/STOL-Jet-Operations Research-Airplane Design Study, Part 2. NASA CR 66422, 1967. (N67-33826) (U)
524. Ross, A. J.: The Theoretical Evaluation of the Downwash Behind Jet-Flapped Wings. ARC R&M 3119, 1961. (U)
525. Rubbert, P. E., Saaris, G. R., et al: A General Method for Determining the Aerodynamic Characteristics of Fan-in-Wing Configurations, Volume I, Theory and Application. USAAVLABS TR-67-61A, Vol 1, 1967. (AD-667980) (U)
526. Rubbert, P. E., and Saaris, G. R.: A General Three-Dimensional Potential-Flow Method Applied to V/STOL Aerodynamics. SAE Paper 680304, 1968. (A68-31326) (U)
527. Sacks, A. H., and Burnell, J. A.: Ducted Propellers — A Critical Review of the State of the Art. Progress in Aeronautical Sciences, Vol 3, Pergamon Press, New York, 1962. (U)
528. Sadoff, M., McFadden, N. M., and Heinle, D. R.: A Study of Longitudinal Control Problems at Low and Negative Damping and Stability with Emphasis on Effects of Motion Cues. NASA TN D-348, 1961. (U)
529. Salmirs, S., and Tapscott, R. J.: The Effects of Various Combinations of Damping and Control Power on Helicopter Handling Qualities During Both Instrument and Visual Flight. NASA TN D-58, 1959. (U)
530. Saunders, G. H.: Development of a Flying-Qualities Specification for Military V/STOL Aircraft. American Helicopter Society Paper 363, 1969. (A69-33520) (U)

531. Schade, R. O., and Kirby, R. H.: Effect of Wing Stalling in Transition on a 1/4-Scale Model of the VZ-2 Aircraft. NASA TN D-2381, 1964. (N64-26840) (U)
532. Schade, R. O.: Ground Interference Effects. NASA TN D-727, 1961. (AD-253626) (U)
533. Schlichting, H., et al: Discussion on Aerodynamic Aspects of V/STOL Aeroplanes. AGARD DFL-151, Report 61/22, 1961. (AD-852414) (U)
534. Scholes, J. F., and Patterson, G. N.: On Wind-Tunnel Tests on Ducted Contra-Rotating Fans. Australian Council for Aeronautics Report -14, 1944. (U)
535. Schuck, G. I.: An Analysis of Results from Army-Sponsored VTOL Research Aircraft. TRECOM TR-61-3, 1961. (AD-250924) (U)
536. Schuler, J. M., Kroll, J., Jr., and Key, D. L.: VTOL Flying-Qualities and the Flight-Research Use of VTOL Variable-Stability Airplanes. AIAA Paper 65-706, 1965. (U)
537. Schulz, R. J.: Simulation of Jet Entrainment in a Potential Field. AEDC-TR-67-217, 1967. (AD-822341) (U)
538. Schwantes, E.: Survey on the Ground Effect of V/STOL Aircraft With Jet Propulsion. DLR-Mitt-68-28, 1968. (N69-27640) (U)
539. Schweizer, G., Seelmann, H., and Weischedel, H.: Control of VTOL Aircraft in Hovering Flight. Presented at Wiss. Ges. Fur Luft-und Raumfahrt Meeting, Munich, 1963. (N64-13925) (U)
540. Schweizer, G.: Pilot Behavior in VTOL Aircraft. AGARD Report 521, 1965. (N67-13399) (U)
541. Seckel, E., Traybar, J. J., and Miller, G. E.: Longitudinal Handling Qualities for Hovering. Princeton Univ. R-594, 1961. (N62-12215) (U)
542. Seibold, W.: The Mechanics of Flow on Annular Wings. Interavia, No. 1, 1955. (U)
543. Shanks, R. E., and Smith, C. C., Jr.: Low-Speed Measurements of Static and Oscillatory Lateral Stability Derivatives of 1/5-Scale Model of a Jet-Powered Vertical-Attitude VTOL Research Airplane. NASA TN D-433, 1960. (U)
544. Shen, Y. C.: Theoretical Analysis of Jet Ground-Plane Interaction. IAS Paper 62-144, 1962. (N62-13384) (U)
545. Shenkman, A. M.: Generalized Performance of Conventional Propellers for VTOL/STOL Aircraft. Hamilton Standard Division, United Aircraft Corporation Report HS-1829, 1958. (U)
546. Shumpert, P. K., and Tibbetts, J. G.: Model Tests of Jet-Induced-Lift Effects on a VTOL Aircraft in Hover. NASA CR-1297, 1969. (N69-21477) (U)
547. Sinacori, J. B., and Lange, A.: Theoretical Investigation of Ducted Propeller Aerodynamics. Vol. IV. Republican Aviation TCREC TR 61-120, 1961. (AD-266422) (U)
548. Sinacori, J. B.: V/STOL Ground-Based Simulation Techniques. USAAVLABS TR-67-55, 1967. (N68-20774) (U)
549. Skelton, G. B.: Investigation of the Effects of Gusts on V/STOL Craft in Transition and Hover. AFFDL TR-68-85, 1968. (AD-679593) (N69-17823) (U)
550. Skifstad, J. G.: Aerodynamics of Jets Pertinent to VTOL Aircraft. AFAPL TR-69-28, 1969. (AD-853494) (U)
551. Sleeman, W. C., Jr., and Linsley, E. L.: Low-Speed Wind-Tunnel Investigation of the Effects of Propeller Operation at High Thrust on the Longitudinal Stability and Trim of a Twin-Engine Airplane Configuration. NACA RM L52D04, 1952. (U)
552. Smelt, R., and Davis, H.: Estimation of Increase in Lift Due to Slipstream. ARC R&M 1788, 1937. (U)
553. Smith, C. C., Jr., and Parlett, L. P.: Flight Tests of a 0.13-Scale Model of a Vectored-Thrust Jet VTOL Transport Airplane. NASA TN D-2285, 1964. (U)
554. Smith, C. C., Jr.: Hovering and Transition Flight Tests of a 1/5-Scale Model of a Jet-Powered Vertical-Attitude VTOL Research Airplane. NASA Memo 10-27-58L. 1958. (U)
555. Smith, C. C., Jr.: Hovering and Transition Flight Tests of a 1/5-Scale Model of a Jet-Powered Vertical-Attitude VTOL Research Airplane. NASA TN D-404, 1961. (U)

556. Smith, C. C., Jr.: Wind-Tunnel Investigation of a Small-Scale Model of an Aerial Vehicle Supported by Tilting Ducted Fans. NASA TN D-409, 1960. (U)
557. Smith, R. E.: A Comparison of V/STOL Aircraft Directional-Handling-Qualities Criteria for Visual and Instrument Flight Using an Airborne Simulator. NRC LR-465, 1966. (U)
558. Solarski, A. H.: Survey and Study of VTOL-STOL Stability and Control Characteristics. WADC TR-59-357, 1959. (AD-314894) (C) Title Unclassified
559. Spence, D. A.: The Lift Coefficient of a Thin, Jet-Flapped Wing. I. Royal Soc. of London Proc. (A) Vol. 238, Dec-Jan 1956-1957. (U)
560. Spence, D. A.: The Lift Coefficient of a Thin, Jet-Flapped Wing. II. A Solution of the Integro-Differential Equation for the Slope of the Jet. Royal Soc. of London Proc. (A) Vol. 261, 1961. (U)
561. Speth, R. F.: Aerodynamic-Test-Data Report for Ground-Effect Model, X-22A. Bell Aerosystems Corp. Rept. 2127-921004, 1963. (AD-472814) (U)
562. Spreemann, K. P.: Effectiveness of Boundary-Layer Control Obtained by Blowing Over a Plain Rear Flap in Combination with a Forward Slotted Flap, in Deflecting a Slipstream Downward for Vertical Take-off. NACA TN 4200, 1958. (U)
563. Spreemann, K. P., and Sherman, I. R.: Effects of Ground Proximity on the Thrust of a Simple Downward-Directed Jet Beneath a Flat Surface. NACA TN 4407, 1958. (U)
564. Spreemann, K. P.: Free-Stream Interference Effects on Effectiveness of Control Jets Near the Wing Tip of a VTOL Aircraft Model. NASA TN D-4084, 1967. (U)
565. Spreemann, K. P.: Induced Interference Effects on Jet and Buried Fan VTOL Configurations in Transition. NASA TN D-731, 1961. (AD-253303) (U)
566. Spreemann, K. P., and Davenport, E. E.: Investigation of the Aerodynamic Characteristics of a Combination Jet-Flap and a Deflected-Slipstream Configuration at Zero and Low Forward Speeds. NASA TN D-363, 1960. (U)
567. Spreemann, K. P., and Kuhn, R. E.: Investigation of the Effectiveness of Boundary-Layer Control by Blowing Over a Combination of Sliding and Plain Flaps in Deflecting a Propeller Slipstream Downward for Vertical Take-off. NACA TN 3904, 1956. (U)
568. Spreemann, K. P.: Investigation of the Effects of Propeller Diameter on the Ability of Flapped Wing With and Without Boundary-Layer Control, to Deflect a Propeller Slipstream Downward for Vertical Take-off. NACA TN 4181, 1957. (U)
569. Spreemann, K. P.: Investigation of Interference of a Deflected Jet with Free Stream and Ground on Aerodynamic Characteristics of a Semispan Delta-Wing VTOL Model. NASA TN D-915, 1961. (AD-261369) (N62-71489) (U)
570. Spreemann, K. P.: Investigations of a Semispan Tilting-Propeller Configuration and Effects of Ratio of Wing Chord to Propeller Diameter on Several Small-Chord Tilting-Wing Configurations at Transition Speeds. NASA TN D-1815, 1963. (U)
571. Spreemann, K. P.: Wind-Tunnel Investigation of Lateral Aerodynamic Characteristics of a Powered 4-Duct-Propeller VTOL Model in Transition. NASA TN D-4343, 1968. (N68-17023) (U)
572. Spreemann, K. P.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of a Powered 4-Duct-Propeller VTOL Model in Transition. NASA TN D-3192, 1966. (U)
573. Stalter, J. L., and Wattson, R. K.: Circulation-Control Research Wind-Tunnel Tests of a Powered-Blowing Type, Circulation-Control Research Airplane Model. II: Effect of Power on the Aerodynamic Characteristics of a Circulation-Control Research Model. University of Wichita, Dept. Eng. Res. Report 187-2, 1957. (U)
574. Stencil, R. T., and Mertaugh, L. J., Jr.: Analysis of a Low-Speed Wind-Tunnel Test of a High-Mass-Rate Vectored-Propulsion Flow Model. LTV Report No. 2-53310/4R-2166, 1965. (AD-613198) (U)
575. Stapleford, R. L., Wolkovitch, J., et al: An Analytical Study of V/STOL Handling Qualities in Hover and Transition. AFFDL-TR-65-73, 1965. (AD-625599) (N66-16671) (U)
576. Staufenbiel, R., and Girtschek, S.: Automatic Stabilization and Safety of VTOL Aircraft. Wissenschaftliche Gesellschaft Fur Luftfahrt Paper 31, 1962. (U)

577. Steils, W. T., Jr.: V/STOL Hover-Control System Analysis. *Jour. of Aircraft*, Vol. 3, 1966. (A66-40985) (U)
578. Stenning, T. A., and Dolan, J. A.: Lateral/Directional Simulation of the CL-84 V/STOL Aircraft in the Transition Regime. AIAA Paper 64-806, 1964. (A64-27095) (U)
579. Stepniewski, W. Z., and Dancik, P. J.: Flight-Testing Experiments with the Tilt-Wing Aircraft. *Aerospace Eng.*, February, 1959, IAS Preprint 59-8, 1959. (U)
580. Stockman, N. O., and Lieblein, S.: Theoretical Analysis of Flow in VTOL Lift-Fan Inlets Without Crossflow. NASA TN D-5065, 1969. (N69-17831) (U)
581. Stouffer, C. G.: Analysis of Wind-Tunnel Test Results of the Fairchild M-243 Jet-Flap Model. Fairchild Aircraft and Missiles Div., R243-006, 1960. (U)
582. Strand, T.: Inviscid-Incompressible Flow Theory of Normal and Slightly Oblique Impingement of a Static Round Jet on the Ground. AROD-5274-3, 1967. (AD-648500) (N67-26496) (U)
583. Streiff, H. G.: Study, Survey of Helicopter and V/STOL Aircraft-Simulator Trainer Dynamic Response; Vol. II - Dynamic-Response Criteria for V/STOL Aircraft Trainers. Navy, Naval Training Device Center Report 1753-2, 1967. (AD-668006) (U)
584. Swaim, R. L., and Connors, A. J.: Effects of Gust-Velocity Spatial Distributions on Lateral-Directional Response of a VTOL Aircraft. AFFDL-TR-67-93, 1967. (AD-657321) (U)
585. Swain, W. N.: Wind-Tunnel Test of a 0.16-Scale XV-4B Model in the NASA Langley 17-Foot Low-Speed Wind Tunnel and the 7 x 10-Foot High-Speed Wind Tunnel. Lockheed-Georgia Report ER 9061, 1968. (U)
586. Sweeney, T. E. (compiler): A Summary of the Princeton University - U.S. Army ALART (Army Low-Speed Aeronautical Research Task) Program. Princeton University Final Report 566, 1962. (U)
587. Tapscott, R. J.: Criteria for Control and Response Characteristics of Helicopters and VTOL Aircraft in Hovering and Low-Speed Flight. IAS Preprint 60-51, 1960. (U)
588. Tapscott, R. J.: Criteria for Primary Handling-Qualities Characteristics of VTOL Aircraft in Hovering and Low-Speed Flight. NASA Conference on V/STOL Aircraft, 1960. (U)
589. Tapscott, R. J., and Kelley, H. L.: A Flight Study of the Conversion Maneuvers of a Tilt-Duct VTOL Aircraft. NASA TN D-372 1960. (AD-246130) (U)
590. Taylor, A. S.: A Theoretical Investigation of the Longitudinal Stability, Control, and Response Characteristics of Jet-Flap Aircraft. Parts I and II. ARC R&M 3272, 1960. (U)
591. Taylor, R. T.: Wind-Tunnel Investigation of Effects of Ratio of Wing Chord to Propeller Diameter with Addition of Slats on the Aerodynamic Characteristics of Tilt-Wing VTOL Configurations in the Transition Speed Range. NASA TN D-17, 1959. (U)
592. Templin, R. J.: Recent Trends in Low-Speed Wind-Tunnel Design and Techniques. ICSA, New York Academy of Sciences, Annals, Vol. 154, 1968. (A69-15573) (U)
593. Theisen, J. G.: V/STOL Stability and Control in Turbulence. American Meteorological Society, 1968. (A68-35131) (U)
594. Theodorsen, T.: Theoretical Investigation of Ducted-Propeller Aerodynamics, Vol I. Dept. National Defense, DDD Technical Library Account 71999, 1960. (AD-240956) (U)
595. Theodorsen, T.: Theoretical Investigation of Ducted-Propeller Aerodynamics, Vol II. Dept. National Defense, DDD Technical Library Account 72000, 1960. (AD-240849) (U)
596. Theodorsen, T., and Nomikos, G.: Theoretical Investigation of Ducted-Propeller Aerodynamics, Vol III. Republic Aviation TCRC TR 61-119, 1961. (AD-268411) (U)
597. Thomas, F.: Investigation of the Increase of Lift of Lifting Wings by Means of Boundary-Layer Control by Blowing. *Z. Flugwiss.* (10), Heft 2, 1962. (U)
598. Thomas, L. P.: A Flight Study of the Conversion Maneuver of a Tilt-Wing VTOL Aircraft. NASA TN D-153, 1959. (U)

599. Thompson, J. F., Jr.: An Experimental Investigation of the Effect of Forward and Rearward Motion on the Thrust of a Shrouded Propeller. USAAVLABS TR-66-65, Miss. State University RR-65, 1966. (U)
600. Tosti, L. P.: Aerodynamic Characteristics of a 1/4-Scale Model of a Tilt-Wing VTOL Aircraft at High Angles of Wing Incidence. NASA TN D-390, 1960. (AD-241926) (U)
601. Tosti, L. P.: Flight Investigation of Stability and Control Characteristics of a 1/8-Scale Model of a Tilt-Wing Vertical-Take-Off-and-Landing Airplane. NASA TN D-45, 1960. (U)
602. Tosti, L. P.: Flight Investigation of the Stability and Control Characteristics of a 1/4-Scale Model of a Tilt-Wing Vertical-Take-Off-and-Landing Aircraft. NASA Memo 11-4-58L, 1959. (U)
603. Tosti, L. P.: Force-Test Investigation of the Stability and Control Characteristics of a 1/8-Scale Model of a Tilt-Wing Vertical-Take-Off-and-Landing Airplane. NASA TN D-44, 1960. (U)
604. Tosti, L. P., and Davenport, E. E.: Hovering Flight Tests of a Four-Engine Transport Vertical-Take-Off Airplane Model Utilizing a Large Flap and Extensible Vanes for Redirecting the Propeller Slipstream. NACA TN 3440, 1955. (U)
605. Tosti, L. P.: Longitudinal Stability and Control of a Tilt-Wing VTOL Aircraft Model with Rigid and Flapping Propeller Blades. NASA TN D-1365, 1962. (U)
606. Tosti, L. P.: Rapid-Transition Tests of a 1/4-Scale Model of the VZ-2 Tilt-Wing Aircraft. NASA TN D-946, 1961. (U)
607. Tosti, L. P.: Transition-Flight Investigation of a Four-Engine-Transport Vertical-Take-Off Airplane Model Utilizing a Large Flap and Extensible Vanes for Redirecting the Propeller Slipstream. NASA TN 4131, 1957. (U)
608. Traybar, J. J.: Aerodynamic Characteristics of a General Tilt-Wing/Propeller Model Tested at Slow Speeds and High Angles of Attack. USAAVLABS TR-67-79, 1968. (AD-671666) (N68-33646) (U)
609. Trebble, W. J. G., and Williams, J.: Exploratory Wind-Tunnel Investigations on a Bluff Body Containing a Lifting Fan. ARC CP-597, 1962. (N62-15845) (U)
610. Trebble, W. J. G.: Low-Speed Wind-Tunnel Investigation of the Roll Stability of a 1/5-Scale Model of the Short SC-1 at Large Sideslip. ARC CP-994, 1967. (AD-837313) (N68-13424) (U)
611. Trebble, W. J. G.: Techniques for the Aerodynamic Testing of V/STOL Models. RAE TM-Aero 1080, 1968. (AD-856976) (U)
612. Trebble, W. J. G.: Wind-Tunnel Experiments on a Simple Lifting-Jet Body with and Without Wings. ARC CP-718, 1964. (N65-17894) (U)
613. True, H. C.: Advanced Lift-Fan System (LFX) Study Continuation. USAAVLABS TR-67-46, GE R-66-RPD-342, 1967. (U)
614. Turner, H. L., and Drinkwater, F. J., III: Longitudinal-Trim Characteristics of a Deflected-Slipstream V/STOL Aircraft During Level Flight at Transition Flight Speeds. NASA TN D-1430, 1962. (U)
615. Turner, H. L., and Drinkwater, F. J., III: Some Flight Characteristics of a Deflected-Slipstream V/STOL Aircraft. NASA TN D-1891, 1963. (N63-18663) (U)
616. Turner, R. C., and Sparkes, D. W.: An Investigation Into the Effect of Ground Proximity on the Performance of Lifting Fans. National Gas Turbine Establishment Memo M 353, 1962. (AD-329625) (C) Title Unclassified
617. Turner, T. R.: Ground Influence on a Model Airfoil With a Jet-Augmented Flap as Determined by Two Techniques. NASA TN D-658, 1961. (U)
618. Uberti, B. J., and Reichert, J. B.: Design Philosophy and Test Experience of a VTOL Aircraft. IAS Paper 59-122, 1959. (U)
619. Vanderlip, E. G., and Schneider, J. J.: Design and Development of the Shaft-Driven Fan-in-Wing VTOL Aircraft. Annals of the N.Y. Academy of Sciences, Vol 107, Art. 1, 1963. (U)
620. Vidal, R. J., Curtis, J. T., and Hilton, J. H.: The Influence of Two-Dimensional Stream Shear on Airfoil Maximum Lift. CAL Rept A1-1190-A-7, 1961. (U)
621. Vidal, R. J.: A Theory of Wing-Propulsion Combination in Slow Flight. CAL Rept A1-1190-A-1, 1959. (U)

622. Vidal, R. J., Hilton, J. H., and Curtis, J. T.: The Two-Dimensional Effects of Slipstream Shear on Airfoil Characteristics. CAL Rept A1-1109-A-5 1960. (AD-246522) (U)
623. Vinje, E. W., and Miller, D. P.: Analytical and Flight-Simulator Studies to Develop Design Criteria for VTOL Aircraft Control Systems. AFFDL TR-68-165, 1969. (U)
624. Vogler, R. D.: Ground Effects on Single- and Multiple-Jet VTOL Models at Transition Speeds over Stationary and Moving Ground Planes. NASA TN D-3213, 1966. (U)
625. Vogler, R. D.: Interference Effects of Single- and Multiple-Round or Slotted Jets on a VTOL Model in Transition. NASA TN D-2380, 1964. (N64-26628) (U)
626. Vogler, R. D., and Kuhn, R. E.: Longitudinal and Lateral Stability Characteristics of Two Four-Jet VTOL Models in the Transition Speed Range. NASA TM X-1092, 1965. (N66-22925) (U)
627. Vogler, R. D.: Surface Pressure Distributions Induced on a Flat Plate by a Cold-Air Jet Issuing Perpendicularly from the Plate and Normal to a Low-Speed Free-Stream Flow. NASA TN D-1629, 1963. (U)
628. Vogler, R. D., and Turner, T.R.: Wind-Tunnel Investigation at Low Speeds to Determine Flow-Field Characteristics and Ground Influence on a Model with Jet-Augmented Flaps. NACA TN 4116, 1957. (U)
629. Von Glahn, U. H.: Exploratory Study of Ground-Proximity Effects on Thrust of Annular and Circular Nozzles. NACA TN 3982, 1957. (U)
630. Vrana, J. C.: On Gyroscopic Inherent Stability of VTOL Aircraft Near the Hover Condition. Canadian Aeronautics and Space Journal, Vol 9, 1963. (U)
631. Wainauski, H. S.: Variable-Geometry Shrouded-Propeller Test Program. Vol I. Data Analysis. HSER-5062-Vol 1, 1968. (AD-835089L) (U)
632. Ward, J. P., and Jones, G. E.: Lessons Learned from the XC-142 Program. Presented at AF V/STOL Technology and Planning Conf, September 1969. (U)
633. Wardlow, R. L., and Templin, R. J.: Some Aerodynamic Characteristics of Wing-Mounted Lifting Fans for VTOL Applications. Canadian Aeronautical Institute Preprint 10/12, 1958. (U)
634. Wardlow, R. L., and McEachern, N. V.: Some Aerodynamic Characteristics of Wing-Mounted Lifting Fans for VTOL Applications. Canadian Aero. Journal March 1959. (U)
635. Wardlow, R. L., and McEachern, N. V.: A Wing-Submerged Lifting Fan: Wind-Tunnel Investigations and Analysis of Transition Performance. NRC LR-243, 1959. (AD-225858) (U)
636. Wattson, R. K., Jr.: Note on Blade-Tip Effects in Shrouded Propellers. University of Wichita Dept. of Eng. Research Report 333, 1959. (U)
637. Weiberg, J. A., and Page, V. R.: Large-Scale Wind-Tunnel Tests of an Airplane Model with an Unswept, Aspect-Ratio-10 Wing, Four Propellers, and Blowing Flaps. NASA TN D-25, 1959. (U)
638. Weiberg, J. A., Griffin, R. M., Jr., and Florman, G. L.: Large-Scale Wind-Tunnel Tests of an Airplane Model with an Unswept, Aspect-Ratio-10 Wing, Two Propellers, and Area-Suction Flaps. NACA TN 4365, 1958. (U)
639. Weiberg, J. A., and Holzhauser, C. A.: Large-Scale Wind-Tunnel Tests of an Airplane Model with an Unswept, Tilt-Wing of Aspect Ratio 5.5 and with Four Propellers and Blowing Flaps. NASA TN D-1034, 1961. (AD-257858) (U)
640. Weiberg, J. A., and Giulianetti, D. J.: Large-Scale Wind-Tunnel Tests of an Airplane Model With an Unswept Tilt Wing of Aspect Ratio of 5.5, and With Various Stall-Control Devices. NASA TN D-2133, 1964. (N64-14728) (U)
641. Weiberg, J. A., and Holzhauser, C. A.: STOL Characteristics of a Propeller-Driven, Aspect-Ratio-10, Straight-Wing Airplane with Boundary-Layer-Control Flaps, as Estimated from Large-Scale Wind-Tunnel Tests NASA TN D-1032, 1961. (AD-258268) (U)
642. Weiberg, J. A., and Giulianetti, D. J.: Wind-Tunnel Investigation of a Tilt-Wing VTOL Airplane With Articulated Rotors. NASA TN D-2538, 1965. (U)
643. Weitz, P.: A Qualitative Discussion of the Stability and Control of VTOL Aircraft During Hover (out of ground effect), and Transition. Naval Postgraduate School Report, 1964. (AD-622205) (N66-12060) (U)

644. White, H. E.: Wind-Tunnel Tests of an Aerodynamically Controlled Tilting-Wing VTOL Configuration. DTMB Aero-1057, 1963. (AD-420239) (N63-22769) (U)
645. Whittley, D. C.: The Augmentor-Wing Research Program; Past, Present, and Future. AIAA Paper 67-0741, 1967. (U)
646. Wickens, R. H.: Aerodynamic Force and Moment Characteristics of a Four-Bladed Propeller Yawed Through 120 Degrees. NRC LR-454, 1966. (U)
647. Wickens, R. H., and Gartshore, I. S.: Observations on the Flow Near a Lifting Propeller. NRC 6705, LR-325, 1961. (U)
648. Williams, J., and Wood, M. N.: Aerodynamic Interference Effects With Jet-Lift Schemes on V/STOL Aircraft at Forward Speeds. RAE TM Aero 912, 1965. (U)
649. Williams, J., and Wood, M. N.: Aerodynamic-Interference Effects with Jet-Lift V/STOL Aircraft under Static and Forward-Speed Conditions. RAE TR-66403, 1966. (AD-813258) (X67-19040) (U)
650. Williams, J., Butler, S. F. J., and Wood, M. N.: The Aerodynamics of Jet Flaps. RAE Rept. Aero 2646, 1961. (AD-253915) (U)
651. Williams, J.: Comments on Some Recent Basic Research on V/STOL Aerodynamics. RAE TN-Aero-2795, 1961. (AD-328280L) (N65-29640) (U)
652. Williams, J., and Butler, S. F. J.: Further Developments in Low-Speed Wind-Tunnel Techniques for V/STOL and High-Lift Model Testing. RAE TN-Aero-2944, 1964. (AD-436352) (U)
653. Williams, J.: Recent Basic Research on V/STOL Aerodynamics at R.A.E., Ministry of Aviation, Zeitschrift Fur Flugwissenschaften, Vol. 14, 1966. (A66-35364) (U)
654. Williams, P. G.: A Note on the Lift of a Jet-Flap Aerofoil Near the Ground. ARC 23821, 1962. (U)
655. Williamson, G. G.: Dynamic Stability Analysis of a VTOL Vectored-Slipstream Vehicle During Transition. Princeton Univ. Report 535, 1961. (AD-260719) (U)
656. Wilson, R. K., and Westbrook, C. B.: Handling Qualities of VTOL Aircraft. AIAA Paper 64-777, 1964. (A64-25313) (U)
657. Winpress, J. K.: Shortening the Takeoff and Landing Distances of High-Speed Aircraft. AGARD 501, 1965. (N66-21022) (U)
658. Winston, M. M., and Huston, R. J.: Propeller-Slipstream Effects as Determined from Wing-Pressure Distribution on a Large-Scale Six-Propeller VTOL Model at Static Thrust. NASA TN D-1509, 1962. (U)
659. Winston, M. M.: Wind-Tunnel Data From a 0.16-Scale V/STOL Model with Direct-Lift and Lift-Cruise Jets. NASA TM X-1758, 1969. (N69-20016) (U)
660. Winston, M. M., and Huston, R. J.: Wing-Pressure Measurements Within the Propeller Slipstream for a Large-Scale V/STOL Wind-Tunnel Model Simulating Transition. NASA TN D-2014, 1963. (U)
661. Winters, C. P.: The Approximate Longitudinal Stability Derivatives of a Vectored-Thrust VTOL. AFIT Rept. GAM/AE68-11, 1968. (AD-833396) (U)
662. Wolkovitch, J.: Approximate Factors for Longitudinal Transfer Function Denominators of the Vertol VZ-2 Tilt-Wing VTOL Airplane. STI TM 128-1, 1962. (U)
663. Wolkovitch, J.: The Calculation of Lateral Stability Derivatives for the Doak VZ-4 VTOL Configuration. STI TM 128-5, 1963. (U)
664. Wolkovitch, J.: The Calculation of Longitudinal Stability Derivatives for the Doak VZ-4 VTOL Configuration. STI TM 128-3, 1963. (U)
665. Wolkovitch, J.: An Introduction to Hover Dynamics. SAE Paper 660676, 1966. (A67-10570) (U)
666. Wolkovitch, J., and Walton, R. P.: VTOL and Helicopter Approximate Transfer Functions and Closed-Loop Handling Qualities. STI TR-128-1, 1965. (U)

667. Wood, M. N.: Jet V/STOL Aircraft Aerodynamics. New York Academy of Sciences, Annals, Vol. 154, 1968. (A69-15566) (U)
668. Wooler, P. T., Burghart, G. H., and Gallagher, J. T.: Pressure Distribution on a Rectangular Wing with a Jet Exhausting Normally into an Airstream. Jour. of Aircraft, Vol. 4, No. 6, 1967. (U)
669. Wu, J. C., Mosher, D. K., and Wright, M. A.: Experimental and Analytical Investigation of Jets Exhausting Into a Deflecting Stream. AIAA Paper 69-223, 1969. (U)
670. Wu, T. Y.: A Lifting-Surface Theory for Wings at High Angles of Attack Extending Through Inclined Jets, Pt. 3. VRC Rept. 9A, 1963. (N64-17121) (U)
671. Wyatt, L. A.: Tests on the Loss of Vertical-Jet Thrust Due to Ground Effect on Two Simple VTOL Planforms, With Particular Reference to the Short SC-1 Aircraft. ARC R&M 3313, 1958. (N63-17120) (U)
672. Wygnanski, I.: The Effect of Jet Entrainment on Loss of Thrust for a Two-Dimensional Symmetrical Jet-Flap Aerofoil. McGill Univ. Rept. 64-13, DRB G-9551-12, 1964. (N64-31243) (U)
673. Yaggy, P. F., and Goodson, K. W.: Aerodynamics of a Tilting Ducted-Fan Configuration. NASA TN D-785, 1961. (U)
674. Yaggy, P. F., and Mort, K. W.: A Wind-Tunnel Investigation of a Four-Foot-Diameter Ducted Fan Mounted on the Tip of a Semi-Span Wing. NASA TN D-776, 1961. (U)
675. Yaggy, P. F., and Rogallo, V. L.: A Wind-Tunnel Investigation of Three Propellers Through an Angle-of-Attack Range from 0° to 85° . NASA TN D-318, 1960. (U)
676. Yaggy, P. F., and Mort, K. W.: Wind-Tunnel Tests of Two VTOL Propellers in Descent. NASA TN D-1766, 1963. (U)
677. Yen, K. T.: On the Thrust Hypothesis for the Jet Flap Including Jet-Mixing Effects. Jour. Aero. Sci., Aug. 1960. (U)
678. Zeganoski, B. A.: A Generalized Experimental Study of Inlet Temperature Rise and Lift-Thrust of Jet VTOL Aircraft in Ground Effect. Bell Rept. 2099/928002, 1964. (AD-447906) (N64-32551) (U)
679. Zon, J., Giansanti, N., and Fitzpatrick, J. E.: Estimated Flying Qualities of the Kaman K-16B VTOL/STOL Aircraft. Part 2 - Dynamic Stability in Transitional Flight. Kaman Aircraft Corp., G-113-7, 1959. (AD-238648) (U)

VTOL-STOL SUBJECT INDEX

1. Propeller-Driven Aircraft and Component Combinations
 - 1.1 Boundary-Layer Control
 - 1.2 Tilting Wing
 - 1.3 Deflected Slipstream
 - 1.4 Ducted Propeller
 - 1.5 Tilting Propeller
 - 1.6 Tailsitter

2. Jet-Driven Aircraft and Component Combinations
 - 2.1 Deflected Jet (Vectored Jet)
 - 2.2 Lift Plus Propulsion
 - 2.3 Tailsitter
 - 2.4 Tilting Engine
 - 2.5 Boundary-Layer Control

3. Fan-Driven (Lifting System) Aircraft and Component Combinations
 - 3.1 Fan in Wing
 - 3.2 Fan in Fuselage

4. Individual Components
 - 4.1 Free Propeller
 - 4.2 Ducted Propeller
 - 4.3 Plane Wing
 - 4.4 Annular Wing
 - 4.5 Jet Flaps or Jet-Augmented Flaps

5. Specialized Categories
 - 5.1 General Static Stability and Control
 - 5.2 Dynamic Stability
 - 5.3 Handling Criteria
 - 5.4 Handling Qualities
 - 5.5 Ground Effects
 - 5.6 Gyroscopic Effects
 - 5.7 Stabilization
 - 5.8 Zero or Low-Airspeed Control and/or Control Systems
 - 5.9 Propeller-Rotation-Direction Effects
 - 5.10 Jet-Wake or Propeller-Slipstream Effects
 - 5.11 Jet-Induced Effects
 - 5.12 Wind-Tunnel Test Techniques
 - 5.13 Miscellaneous Effects

6. Bibliographies and Compilations

KEY TO VTOL-STOL SUMMARY TABLE

Column Heading	Abbreviation	Definition
V/STOL Concept	BLC DJ DP DSS FIF FIW FP HL JF L+P RF S TE TP TS TW	Boundary-Layer Control Deflected Jet (Vectored Jet) Ducted Propeller Deflected Slipstream Fan in Fuselage Fan in Wing Free Propeller High Lift (Flaps, Slots, Slats) Jet Flap or Jet-Augmented Flap Lift-Plus-Propulsion Engine Rotating Flap Several Tilting Engine Tilting Propeller Tailsitter Tilting Wing
Nature of Report Material	A BIB D DS E PR R S T	Analytical Bibliography Description Design Study Experimental Pilot Report Research Summary Several Theoretical
Flight Regime or Air Flow	Ax C H LS N-Ax S St T	Axial Flow Cruise Hover Low Speed Nonaxial Flow Several Static Transition
Test Article	C E M P PM S Sim	Component Existing Aircraft (Production Aircraft) Model Prototype Prototype Model Several Simulator
Type of Test	F S Sim St T WT	Flight Test Several Simulator Static Princeton Dynamic Model Track Wind Tunnel

TABLE 9-A
VTOL-STOL SUMMARY

SOURCE NUMBER	CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VTOL CONCEPT	NATURE OF PARENT AIRCRAFT	RIGHT ANGLE OR AIRCRAFT	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
								STABILITY AND CONTROL						VTOL CONCEPT																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
								Handing Qualities	Maneuverability	Takeoff/ Landing	Operational	Structural	Control	Maneuverability	Takeoff/ Landing	Operational	Structural	Control	Maneuverability																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
11	94	56	BLC/DP	D	S	-	X																				157	80	BLC/DSS	R/D	LS	-																				DEVELOPMENT PROGRAM FOR LOCKHEED BLC C-130		189	60	BLC	E/D	LS	M	WT																			LIFT AUGMENTATION BY SPANWISE BLOWING OVER A LIFTING SURFACE		244	58	BLC/DSS	E/A	LS	M	WT	X																		LIFTING EFFECTIVENESS, FLOW REQ OF BLOWING BLC APPLIED TO PROPELLER-DRIVEN AIRPLANE		265	61	BLC	E/A	LS	E	F	X																		LIASION AIRCRAFT		281	66	BLC/DSS	E/P/A	LS	M	F/SIM																			HANDLING QUALITIES OF STOL SEAPLANE		443	63	BLC/DSS	E/A	LS	M	WT/ST	X																		TEST OF FLAPPED WING IMMERSED IN SLIPSTREAM OF 4 PROPELLERS, GND PROXIMITY, BLC		502	63	BLC/DSS	E/APR	LS	P	F																			MODIFIED C-130, STOL PERFORMANCE, BLC FLAP, AILERONS, ELEVATOR, RUDDER		503	63	BLC/HL	E/APR	LS	SIM																				C-130		562	58	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS		567	56	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS SLAT, END PLATES, PROPELLER POSITION VARIATIONS		568	57	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS		573	57	BLC	E/A	LS	M	WT	X																		CIRCULATION-CONTROL RESEARCH MODEL		587	62	BLC/JF	T/E/A	LS	M	WT	X	X	X	X	X														INCR OF LIFT DUE TO BLOWING BLC, 4T MOMENTUM REQ TO PREVENT SEF, SURVEY ON SYSTEMATIC REAR		637	50	BLC	E/A	LS	M	WT	X																		46-FT SPAN MODEL LIKE C-143 BUT 4 PROPELLERS, BLOWING FLAPS		638	58	BLC	E/A	LS	M	WT	X																		46-FT SPAN MODEL LIKE C-143, AREA, Suction FLAPS, LE FLAP		639	61	BLC/TW	E/A	T/C	M	WT	X																		LARGE MODEL, 4 PROPELLERS, BLC TRAIL IN-EDGE FLAP		641	61	BLC	E/A	S	M	WT	X																		AR-10 WING, DUAL ROTATION PROPELLERS LIKE C-143 BUT 4 PROPELLERS	12	25	59	TW	E/A	H/T	P	F	X																		VZ2		31	62	TW	E/A	LS	M	F																			FREE AIR TESTS, 4 PROPELLER MODEL	69	66	TW/DSS	A	T	T	-	-																			ANALYTICAL METHOD FOR PREDICTING STABILITY CHAR. OF TILT-WING VTOL AIRCRAFT	74	66	TW/DSS	R/A	H/T/C	M/P/M	WT/F	WT/F																			WT - FLIGHT TEST CORRELATION PROGRAM TO DETERMINE STATIC WT TEST TECHNIQUES	80	68	TW	E/A	T	M	WT	WT																			4 PROPELLER TILT-WING VTOL, STATIC AND DYNAMIC DERIVATIVES	86	63	TW	E/D/P/R	H/T	SIM	SIM	SIM																			SIMULATOR STUDY OF TILT-WING HANDLING QUALITIES, 2 DEGREES OF FREEDOM
	157	80	BLC/DSS	R/D	LS	-																				DEVELOPMENT PROGRAM FOR LOCKHEED BLC C-130																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	189	60	BLC	E/D	LS	M	WT																			LIFT AUGMENTATION BY SPANWISE BLOWING OVER A LIFTING SURFACE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	244	58	BLC/DSS	E/A	LS	M	WT	X																		LIFTING EFFECTIVENESS, FLOW REQ OF BLOWING BLC APPLIED TO PROPELLER-DRIVEN AIRPLANE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	265	61	BLC	E/A	LS	E	F	X																		LIASION AIRCRAFT																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	281	66	BLC/DSS	E/P/A	LS	M	F/SIM																			HANDLING QUALITIES OF STOL SEAPLANE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	443	63	BLC/DSS	E/A	LS	M	WT/ST	X																		TEST OF FLAPPED WING IMMERSED IN SLIPSTREAM OF 4 PROPELLERS, GND PROXIMITY, BLC																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	502	63	BLC/DSS	E/APR	LS	P	F																			MODIFIED C-130, STOL PERFORMANCE, BLC FLAP, AILERONS, ELEVATOR, RUDDER																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	503	63	BLC/HL	E/APR	LS	SIM																				C-130																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	562	58	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	567	56	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS SLAT, END PLATES, PROPELLER POSITION VARIATIONS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	568	57	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X														WING PLUS PROPELLERS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	573	57	BLC	E/A	LS	M	WT	X																		CIRCULATION-CONTROL RESEARCH MODEL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	587	62	BLC/JF	T/E/A	LS	M	WT	X	X	X	X	X														INCR OF LIFT DUE TO BLOWING BLC, 4T MOMENTUM REQ TO PREVENT SEF, SURVEY ON SYSTEMATIC REAR																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	637	50	BLC	E/A	LS	M	WT	X																		46-FT SPAN MODEL LIKE C-143 BUT 4 PROPELLERS, BLOWING FLAPS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	638	58	BLC	E/A	LS	M	WT	X																		46-FT SPAN MODEL LIKE C-143, AREA, Suction FLAPS, LE FLAP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	639	61	BLC/TW	E/A	T/C	M	WT	X																		LARGE MODEL, 4 PROPELLERS, BLC TRAIL IN-EDGE FLAP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	641	61	BLC	E/A	S	M	WT	X																		AR-10 WING, DUAL ROTATION PROPELLERS LIKE C-143 BUT 4 PROPELLERS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
12	25	59	TW	E/A	H/T	P	F	X																		VZ2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	31	62	TW	E/A	LS	M	F																			FREE AIR TESTS, 4 PROPELLER MODEL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
69	66	TW/DSS	A	T	T	-	-																			ANALYTICAL METHOD FOR PREDICTING STABILITY CHAR. OF TILT-WING VTOL AIRCRAFT																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
74	66	TW/DSS	R/A	H/T/C	M/P/M	WT/F	WT/F																			WT - FLIGHT TEST CORRELATION PROGRAM TO DETERMINE STATIC WT TEST TECHNIQUES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
80	68	TW	E/A	T	M	WT	WT																			4 PROPELLER TILT-WING VTOL, STATIC AND DYNAMIC DERIVATIVES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
86	63	TW	E/D/P/R	H/T	SIM	SIM	SIM																			SIMULATOR STUDY OF TILT-WING HANDLING QUALITIES, 2 DEGREES OF FREEDOM																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

* See table 98 for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT REGIME OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS			
								WING		PROPPELLER		PROPPELLER ROTATION		PROPPELLER STALL		PROPPELLER VIBRATION		STABILITY AND CONTROL				
								Wing	Propeller	Propeller	Propeller	Propeller	Propeller	Propeller	Propeller	Propeller	Propeller	Propeller		Propeller	Propeller	Propeller
109	61	TW/DSS	E/A	T/C	PM	WT	X															KAMAN X-16B MODEL
101	68	TW	A	T	-	-																IMPORTANT FACTORS INFLUENCING DYNAMIC LONG STAB OF TILT-WING V/STOL AIRCRAFT
102	66	TW	E/A	H/T/C	M	WT	X															STATIC AND DYNAMIC LONG STAB DERIVATIVES
128	60	TW/DSS	T/A	H/T/C	-	-																METHODS FOR PREDICTING AERO STAB DERIVS OF PROPELLER-DRIVEN TILT-WING V/STOL AIRCRAFT
130	68	TW	A	H/T	M	WT																EXPERIMENTAL VALUES OF LONG STAB DERIVS OF 3 TILT-WING AIRCRAFT VARIED TO ANALYZE CHARACTERISTIC ROOTS AND TRANSIENT RESPONSE
131	60	TW	A	T	M	WT	X															DISCUSSION OF SLIPSTREAM EFFECTS
136	69	DP/TW	A	LS	-	-	X															ASPECTS OF LONG DYNAMIC STAB CHAR OF PROPELLER-DRIVEN V/STOL AIRCRAFT ANALYZED
138	67	TW/DSS	E/A	T	M	T																XC-142A MODEL. LONGITUDINAL DYNAMICS AT HIGH WING INCIDENCE
139	61	TW	A/E	T	M/E	F																PRINCETON FREE-FLIGHT FACILITY (VZ-2)
148	64	TW/DSS	E/A	T	M	WT	X															TILT-WING V/STOL TRANSPORT STALL PERFORMANCE. LONGITUDINAL STAB AND CONTROL CHARACTERISTICS
156	66	TW/DSS	T	H/T	-	-																WING LOADING OF ARBITRARY PLANFORM EQUAL TO OR LESS THAN SPAN OF PROPELLER JET
158	68	TW/DSS	E/A	LS	M	WT	X															AERO CHAR OF LARGE SCALE MODEL OF 4-PROPELLER TILT-WING CONFIG GROUND EFFECTS
163	68	TW/DSS	E/P/R/A	-	PM	F																RESULTS OF CATEGORY II FLT TESTS OF XC-142. CATEGORY I DATA INCLUDED
164	64	TW	E/A	H/T/C	M	WT	X	X														AERO CHARACTERISTICS OF WING - PROPELLER, WING ALONE, AND PROPELLER ALONE
168	59	TW	E/A	T	M	WT	X															TWIN-ENGINE MODEL
174	62	TW	E/A	T	M	WT	X															REVIEW STUDY (VZ-2)
176	63	TW	D/A/E	S	S	S																LONG AERO CHARACTERISTICS. EFFECT OF PROPELLER-ROTATION DIRECTION
183	69	TW/DSS	E/A	LS	M	WT																EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
184	66	TW	E	LS	M	WT	X															EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
185	66	TW	E	LS	M	WT	X															EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
186	67	TW	E	LS	M	WT	X															EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
187	67	TW	E	LS	M	WT	X															EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
188	67	TW	E	LS	M	WT	X															EFFECT OF PROPELLER-ROTATION DIRECTION, FLAPS, SLATS, FENCES, ON AERO AND FLOW CHARACTERISTICS
189	64	TW/DSS	E	LS	M	WT	X															LONG AERO CHARACTERISTICS. WING STALLING CHARACTERISTICS

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT INDEX CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/S/OT CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT REGIME OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS
								Wings and Motors	Wings	Fuselage	Propellers	Control	Longitudinal	Lateral/Directional	Dynamic	Stability	Structural	Operational Effects	
12 (CONT)	190	64	TW/DSS	E	LS	M	WT	X											LONG AERO CHARACTERISTICS. WING STALLING CHARACTERISTICS
	191	64	TW	E	LS/H	M	WT	X	X										EFFECT OF SLATS AND LE AND TE FLAPS ON AERO AND FLOW CHARACTERISTICS
	192	66	TW/DSS	E	LS	M	WT		X										SEMI-SPAN MODEL. WING SURFACE PRESSURES OVER α FROM 60° TO 80° FOR THRUST COEFF 2, 8, 8 AND $\delta_1 = 0, 20^\circ, 40^\circ, 60^\circ$. PROP-ROTATION-DIRECTION EFFECTS
	197	61	TW/DSS	E/A	T	PM	WT							X					KAMAN K-16B MODEL
	230	67	TW/DSS	E/A	LS	M	WT	X	X										LONG LIFT AND CONTROL CHAR. OF 4-PROPELLER TW MODEL IN GRD EFF. RECIRCULATION EFFECTS MOVING-BELT GROUND PLANE THROUGH REPT
	231	67	TW	E/A	T	M	WT	X	X										GROUND EFFECTS ON TILT-WING AIRPLANE
	222	66	TW/DSS	E/A	T	M	WT		X										EXPERIMENTAL STUDY OF LONG AERO PROBS OF FLAPPED 4-PROPELLER VSTOL TRANSPORT
	247	61	TW	E/A	H/T	M	WT	X	X										AD-1 CONVERSION TO 4-PROPELLER TILT WING (MOHAWK)
	263	66	TW	T/A/E	N-Ax	C	WT	X	X										WING PLUS PROPELLERS
	264	60	TW/DP	D/E	H/T	P	F	X											VZ-2, VZ-4
	262	61	TW	T/A	T	-	-		X										WING AND FLAP LOADS
	295	60	TW/DSS	E/A	ST	M	ST	X	X										WING AND FLAP LOADS
	298	63	TW/DSS	E/A	T	M	WT	X	X										WING AND FLAP LOADS
	313	66	TW	E/A	T	M	U		X										4-POINT CONTROL
	327	61	TW/DSS	R/D/A	H/T	-	-	X	X										DISCUSSION OF TW AND DSS. PROPELLER-DRIVEN VTOL AIRCRAFT
	329	64	TW/DSS	E/A	T	M	WT		X										VZ-2. FORCE TEST TO DETERMINE LONG AERO CHAR AND AILERON CONTROL CHAR. EFF OF LE DROOP
	354	66	TW	E/A	0-90°	C	WT	X	X										WING PLUS PROPELLER, AND SEPARATELY
	366	60	TW/DSS	E	T	M	WT	X	X										AERO CHAR. OF TILT-WING, DEFLECTED SLIPSTREAM, AND TW + DSS VTOL AIRCRAFT*
	369	66	TW	-	LS	M	WT												RESULTS OF DYNAMIC STAB TESTS. EFFECT OF STAB DERIVS ON DYNAMIC STAB
	377	66	TW/TP	T	T/C	-	-		X										LARGE TILT-ANGLE LIFTING SURFACE THEORY. DOWNWASH ANGLES AT TAIL NOT ACCURATELY PREDICTED AT HIGH ANGLES.
	386	66	TW	R	H/T/C	-	-		X										SUMMARY OF TEST PROGRAM ON CL 84 VSTOL. PROTOTYPE AND 2 TYPES OF SIMULATORS TO ASSESS QUALITATIVELY HANDLING QUALITIES
	387	67	TW	E/A	T	M	F		X										4-PROPELLER MODEL
	388	66	TW	E/A	H	M	F		X										4-PROPELLER MODEL
	389	66	TW	E/A	T	M	F		X										4-PROPELLER MODEL

* See table 9B for key to summary

TABLE 9.A (CONT'D)

1.2 CONT'D	SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF EFFORT MATERIAL	FLIGHT REGIME OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	Wing Area and Aspect	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS				
										Free Propeller	Duct Propeller	Two-Dimensional Data	Passive Data	Max. Lift or Thrust	Ground Effect	Propeller Efficiency	Rolling Moment	Control	Yaw	Pitch		Roll	STABILITY AND CONTROL		
																							Control	Yaw	Pitch
413		63	TW	A/D/E	S	S	S	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	REVIEW STUDY OF TILT-WING V/STOL AERODYNAMICS		
432		63	TW/DSS	E/A	T	M	WT	X															VZ-2 WING STALLING PHENOMENA STUDIED. LIFT AND DRAG CORRELATED WITH FLT. TEST RESULTS. FLYING QUALITIES PROBLEMS CORRELATED WITH WING STALL. TUFT STUDY		
441		60	TW	E/A	T	M	WT																DAVID TAYLOR MODEL BASIN, STOL MODEL		
446		67	TW	E/A	ST	M	ST	X															4-PROPELLER MODEL		
460		68	TW/DSS	E/A	T	M	WT	X															4-PROPELLER MODEL		
461		62	TW	E/A	H/T	M	F																4-PROPELLER MODEL WITH PROGRAMMED FLAPS (FLT TEST)		
462		64	TW	E/A	H/T/C	M	WT/ST																FREE FLIGHT TESTS OF 1/8 SCALE MODEL OF 4-PROPELLER V/STOL TRANSPORT		
464		62	TW	E/A	S	M	WT																4-PROPELLER MODEL WITH PROGRAMMED FLAPS (FORCE TEST)		
465		68	TW	E/A	T	PM	WT	X															VZ-2		
466		62	TW	E/A	H	M	ST																SLIPSTREAM FLOW AROUND VZ-2, X-18, AND ARB CONFIG MODELS		
480		66	TW	P/R/A	H/L/S	PM	F																FULL-SCALE FLIGHT INVESTIGATION OF MODIFIED VZ-2 OPERATIONAL AND AERO ASPECTS		
481		62	TW	E/A	H/T	P	F																ALERON FOR YAW CONTROL INVESTIGATION (VZ-2)		
482		62	TW	E/A	S	P	F	X															FLIGHT TEST RESULT SUMMARY (VZ-2)		
494		68	TW/DSS	E/A	T	M	T/WT	X															XC-142A MODEL. GROUND EFFECTS ON LONG FORCES AND PITCHING MOMENT		
496		68	TW	E/A	T	M	T	X															XC-142A MODEL TESTED IN OP OF LAT-OIR FREEDOM IN MID-TRANSITION FLT COND. CONTROL EFFECTIVENESS. CONTROL MIXING REQUIREMENTS		
499		61	TW	E/A	T	M	T	X															PRINCETON UNIV FORWARD FLIGHT FACILITY		
518		66	TW/DSS	D	S	P	-																KAMAN K-16B DESCRIPTION		
531		64	TW/DSS	E/A	T	M	SIM																DYNAMIC LAT STAB AND CONT CHAR OF THE VZ-2. SIM FLT TEST EVALUATION.		
570		63	TP/TW	E/A	T/L/S/C	M	WT	X															TRANSITION RANGE WHERE WING STALLING OCCURS		
578		64	TW/DSS	E/A	T	SIM	SIM																DETERMINATION OF LIMITING VALUES ON TRANSITION STALLING CHAR. RATIO OF WING CHORD TO PROP DIAM VARIED		
591		69	TW	E/A	T	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	PROP AREAS IN SIM OF LAT-OIR DYN BEHAVIOR OF STOL AIRCRAFT. ED OF MOTION. TURBULENCE EFFECTS		
596		68	TW	E/A	S	P	F	X															WING CHORD TO PROPELLER DIAMETER RATIO. WING PLUS PROPELLER. SLATS		
600		60	TW	E/A	T	PM	WT	X															VZ-2 CONVERSION MANEUVER		
601		60	TW	E/A	S	PM	F																VZ-2		
																							X-18 MODEL (FLIGHT TEST)		

* See table 9B for key to summary

TABLE 9.A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT REGIME OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS			
								Wing	Face and Moment	Wing	Spanwise	Two-Dimensional	Pressure Dist.	Max. Lift or Turning	Ground Effect	Propeller Effects	Control	Longitudinal	Dynamic		Stability	Singular	Operational Effects
1.2 (CONT)	602	58	TW	E/A	S	PM	F										X						VZ-2 MODEL FLIGHT TEST
	603	60	TW	E/A	S	PM	WT	X															X-18 MODEL (FORCE TEST)
	605	61	TW	E/A	H/T	PM	F																VZ-2, 1/4 SCALE MODEL, RIGID AND FLAPPING PROPELLER BLADES
	605	61	TW	E/A	T	PM	F																VZ-2, 1/4 SCALE MODEL
	608	66	TW	E	H/T	M	WT	X															PRINCETON DYNAMIC MODEL TRACK FACILITY. A GENERAL TILT-WING-PROPELLER MODEL TECH. AND OPERATIONAL LESSONS FROM XC-142 PROGRAM. WT AND FLT. TEST RESULTS COMPARED PROP. PITCH MOM. AT HIGH INFLOW ANGLES
	652	66	TW	R/D	H/T/C	-	-																LARGE SCALE WT TEST OF TILT-WING AND DEFLECTED SLIPSTREAM MODEL
	639	61	TW/DSS	E	T	M	WT	X															EFFECTS OF HIGH-LIFT DEVICES ON FLOW SEPARATION, BUFFET, AND DESCENT CHAR
	640	64	TW/DSS	E/A	LS	M	WT	X															PERFORMANCE AND CONTROL CHAR. OF VTOL AIRPLANE
	642	66	TW	E	T/H	M	WT/ST	X															VTOL CONFIG WITH FREE-PIVOTED TILTING WING WITH AERODYNAMICALLY CONTROLLED TILT ANGLE. EFF. OF PIVOT LOC. ON ABILITY TO TRIM
	644	63	TW	E/A	LS	M	WT	X															6-PROPELLER MODEL. PROPELLER SLIPSTREAM EFFECTS INVESTIGATED
	658	62	TW/DSS	E/A	ST	M	ST																VZ-2 STABILITY DERIVATIVES
	662	62	TW	T/A/E	S	PM	FW/T																METHOD FOR ASSESSING NONUNIFORM FLOW FIELDS OF WING-PROPELLER SLIPSTREAM AERODYNAMICS. METHODS FOR SPANNWISE LIFT DISTRIBUTION AND INDUCED DRAG
	670	63	TW/DSS	T	H/T	-	-																BREGUET 941 DESCRIPTION
	11	62	DSS	D	LS	P	F	X															WING PLUS PROPELLERS (VARIOUS COMBINATIONS)
	61	58	DSS	E/A	T	C	U	X	X														ANALYTICAL METHOD PREDICTING STAB. CHAR. OF VTOL AIRCRAFT
	69	66	TW/DSS	L	T	-	-																WT-FLT. TEST PROGRAM TO DETERMINE STATUS OF WT TEST TECHNIQUES
	74	66	TW/DSS	H/A	H/T/C	M/PM	WT/F																KAMAN K-168
	89	61	TW/DSS	E/A	U	PM	WT	X															STATIC AND DYNAMIC STABILITY (VZ-3)
	106	56	DSS	T/A/E	H/T	M	WT	X															METHODS PREDICTING AERO. STAB. DERIVS. OF PROPELLER-DRIVEN V/STOL AIRCRAFT
	28	60	TW/DSS	T/A	H/T/C	-	-																BREGUET 941. LOW-SPEED FLYING QUALITIES COMPARED WITH AGARD REQUIREMENTS FOR V/STOL
	141	64	DSS	A	C	-	-																STALL PERFORMANCE AND LONG STAB. AND CONTROL CHAR. OF V/STOL TRANSPORT
	149	64	TW/DSS	E/A	T	M	WT	X															BREGUET 941 AND 942
	51	60	DSS	D	S	P	F	X															DISCUSSION OF COORDINATED METHODS USED TO PERFECT DYNAMIC BEHAVIOR OF BREGUET 940
	152	61	DSS	D	H/T/C	M/PM	WT/F																

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V-STOL CONCEPT	NATURE OF RESEARCH INSTRUMENT	FLIGHT PROFILE OF AIRCRAFT	TEST AIRCRAFT	TYPE OF TEST	WING AREA AND MOMENT	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS		
									Wing	Free Propeller	Fixed Propeller	Free-Directional Data	Reverse Data	Max. Lift or Thrust	Ground Effect	Propeller Torque	Control	Longitudinal	Lateral-Directional		Dynamic	Stability
154	06	TW/DSS		T	H/T	-	-															WING LOADING OF ARBITRARY PLANFORM EQUAL TO OR LESS THAN SPAN OF PROPELLER JET
157	00	BL/DSS		R/D	LS	-	-															DESCRIPTION OF THE DEVELOPMENT PROGRAM FOR LOCKHEED BLC C-130 AIRCRAFT
158	06	TW/DSS		E/A	LS	M	WT	X														AERO CHAR OF A LARGE SCALE MODEL OF 4-PROPELLER CONFIG. GROUND EFF.
163	08	TW/DSS		E/P/A	-	PM	F															RESULTS OF CATEGORY II FLT TESTS OF XC-142. CATEGORY I DATA INCLUDED
165	05	DSS		E/A	ST	C	ST	X	X	X	X											WING PLUS PROPELLERS
183	00	TW/DSS		E/A	LS	M	WT															LONG AERO CHAR. EFFECT OF PROPELLER-ROTATION-DIRECTION EFFECTS
189	04	TW/DSS		E	LS	M	WT	X														LONG AERO CHAR. WING STALLING CHAR
190	04	TW/DSS		E	LS	M	WT	X														LONG AERO CHAR. WING STALLING CHAR
192	06	TW/DSS		E	LS	M	WT															SEMI-SPAN MODEL WING SURFACE PRESSURES OVER α FROM 5° TO 80° FOR THRUST COEFF. 3, 5, 8, 9, AND $\delta_1 = 0, 20^\circ, 40^\circ, 80^\circ$. PROP. ROTATION DIRECTION EFFECTS
197	01	TW/DSS		E/A	T	PM	WT															KAMAN K-1188 MODEL
222	83	DSS/TS		PR	S	P	F	X														VZ3 AND X-13
230	07	TW/DSS		E/A	LS	M	WT	X														LONG, LAT. AND CONTROL CHAR OF 4-PROPELLER TW MODEL IN GRD EFF. RECIRCULATION EFFECTS, MOVING-BELT GROUND PLANE, THROUGH REPT.
232	06	TW/DSS		E/A	T	M	WT															EXPERIMENTAL STUDY OF LONG AERO PROBS OF FLAPPED 4-PROPELLER VISTOL TRANSPORT
244	08	BL/DSS		E/A	LS	M	WT	X														LIFTING EFFECTIVENESS. FLOW REG OF BLOWING BLC APPLIED TO PROPELLER-DRIVEN AIRPLANE
261	01	BL/DSS		E/A	S	M	WT															8 PROPELLERS, T-TAIL
264	08	DSS		E/A	H	C	ST	X	X													WING PLUS PROPELLERS, PROPELLER POSITION EFFECTS
261	06	DSS/BLC		E/P/A	LS	PM	P/SIM															HANDLING QUALITIES OF A STOL AIRPLANE
266	00	DSS/TW		E/A	ST	M	ST	X														8 PROPELLERS, 36-FT SPAN, AP-48 DOUBLE-SLOTTED FLAPS
268	03	DSS/TW		E/A	T	M	WT	X														WING AND FLAP LOADS
304	06	DSS		E/A	S	P/SIM	WT/R/SIM	X														AMES 40 x 80 WT TEST OF PROTOTYPE PLUS SIMULATOR (VZ-3)
327	01	TW/DSS		R/D/A	H/T	-	-	X														DISCUSSION OF TW AND DSS, PROPELLER-DRIVEN VTOL AIRCRAFT
328	04	TW/DSS		E/A	T	M	WT															VZ-2. FORCE TEST TO DETERMINE LONG AERO CHAR AND ALLERON CONTROL CHAR. EFF OF LE DROOP
321	05	DSS		E/A	LS	C	S															SUMMARY OF NACA FLAP AND VANE INVESTIGATIONS
368	08	DSS		E/A	H/T	C	WT	X	X	X												WING PLUS PROPELLERS, TURNING EFFECTIVENESS

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VIBROT CONCEPT	NATURE OF REPORT OR ABSTRACT	RIGHT SOURCE OR ABSTRACT	TEST ARTICLE	TYPE OF TEST	WIND TUNNEL	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS	
									Free Propeller	Disturbance Data	Pressure Data	Mass Int. or Torque	Ground Effect	Propeller Thrust	Control	Longitudinal	Lateral/Directional	Dynamics		Multistage
1.2 (CONT'D)	355	DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, TURNING EFFECTIVENESS
	357	DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, PROPELLER POSITION EFFECTS
	358	DSS	E/A	0-90°	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	4-PROPELLER MODEL, WING PLUS PROPELLERS, TURNING EFFECTIVENESS
	359	DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, LE SLAT
	360	DSS	E/A	T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	LARGE POWER EFFECTS ON DIR STAB, (VZ4)
	361	DSS	E/A	S	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	4 PROPELLERS, PROPELLER EFFECTS, SLAT, TAIL FAN OPERATION
	363	DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, TURNING EFFECTIVENESS
	365	DSS	T/A/E	H/T	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, LIFT AND DRAG ESTIMATION METHODS
	367	DSS	E/A	T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	LARGE WALL CORRECTIONS NOT REMOVED
	368	TW/DSS	E	T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	AERO CHAR OF TILT-WING, DEFLECTED SLIPSTREAM, AND TW + DSS VTOL AIRCRAFT
	369	DSS	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	STAR AND CONTROL DATA ON 2-PROPELLER STOL AIRCRAFT
	416	DSS	E/A	H	M	F														4 CASCADE WINGS, 4 PROPELLERS
	443	BLC/DSS	E/A	LS	M	WT/ST	X	X	X	X	X	X	X	X	X	X	X	X	X	TEST OF FLAPPED WING IMMERSED IN SLIPSTREAM OF 4 PROPELLERS, GRID PROXIMITY, BLC
	448	DSS	E/A	0-90°	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPELLERS, PROPELLER LOCATION EFFECTS
	480	DSS or TW	E/A	T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	4 PROPELLERS
	487	DSS	E/A	H/T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	WING WITH DUCTED FANS AND DOUBLE-SLOTTED FLAP, DUCT POSITION AND DUCT EXIT CONFIGURATION, FLAP TURNING EFFECTIVENESS
	488	DSS	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	LONG FORCE CHAR OF STOL MODEL, WING SPAN VARIED, PROP ROTATION-DIRECTION EFFECTS, SPANWISE VARIATION OF PROP THRUST
	488	DSS	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PRESSURE DISTRIBUTION DATA ON STOL MODEL, WING SPAN VARIED, PROP ROTATION-DIRECTION EFFECTS, SPANWISE VARIATION OF PROP THRUST
	500	DSS	E/A	LS	P	F														BREGUET 941, RESULTS OF FLT TEST OF PERFORMANCE, HANDLING QUALITIES, AND OPERATIONAL CHAR
	502	BLC/DSS	E/A/PR	LS	P	F														MODIFIED C-130, STOL PERFORMANCE, BLC FLAP, ALLERONS, ELEVATOR, RUDDER
	516	DSS	D	LBC	P	F														BREGUET STOL AIRCRAFT
	518	DSS/TW	D	S	P	-														KAMAN K-108, DESCRIPTION IN JAHS
	598	DSS/JF	E	H/LS	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN WING PLUS 2 PROPELLERS, WING TIP BEYOND SLIPSTREAM
	597	DSS/BLC	E/A	ST	M	F	X	X	X	X	X	X	X	X	X	X	X	X	X	4-ENGINE TRANSPORT

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

REPORT NUMBER	CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT REGIME	TEST ARTICLE	TEST ARTICLE	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS	
									Wing	Fuselage	Two-Dimensional Data	Three-Dimensional Data	Max Lift or Thrust	Ground Effect	Propeller Torque	Control	Longitudinal	Lateral/Directional		Dynamics
508	57	BLC/DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	EFFECTS OF PROP DIAM ON ABILITY OF FLAPPED WING TO DEFLECT SLIPSTREAM DOWNWARD PROB AREAS IN SIM OF LAT DIR DYN BEHAVIOR OF STOL AIRCRAFT. EFF OF MOTION. TURBULENCE EFFECTS
578	64	TW/DSS	E/A	T	SIM															
578	69	DSS	D/A/E	S	P	F	X													
604	66	DSS	E/A	H	M	F	X													
607	67	DSS	E/A	T	M	F	X													
614	62	DSS	E/A	T	P	F	X													
615	63	DSS	E/A	LS	PH	F														
636	61	TW/DSS	E	T	M	WT	X													
640	64	TW/DSS	E/A	LS	M	WT	X													
666	61	DSS	T/A	T	-	-														
668	62	TW/DSS	E/A	ST	M	ST														
670	63	TW/DSS	T	H/T	-	-														
1A	27	DP	E	C/T/H	M	WT	X													
55	63	DP	E	C/T/H	M	WT	X	X												
64	69	DP/RLC	D	LS/C	P	-	X													
107	63	DP	E/A	H/T/L/S	-	-														
134	65	DP	E/A	H	PH	ST														
136	68	DP/TW	A	LS	-	-	X													
138	68	DP	R/A	T	-	-														
144	64	DP	E/A	T	M	WT	X													
184	66	DP	P/A	H/T/C	E	F	X													
223	67	DP	E/A	H/T/C	M	WT														
224	66	DP	E/A	H/T/C	M	WT	X													
229	62	DP	E/A	H/T	C	WT	X	X												

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT OR MATERIAL	RIGHT BROKE OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS				
								Wing	Fuselage	Empennage	Control Surfaces	Control	Longitudinal	Lateral Directional	Dynamics	Substructure	Stability		Gravitational	Force or Torque Applied	Control System	Handling Qualities
238	DP	58	T	AX	-	-	X	X														INVISID THEORY FOR STEADY AERO LOADING ON DUCTED PROPELLER IN FORWARD FLIGHT
249	DP	62	E/A	H/T	M	WT	X	X														DIVISION OF AERO LOADS. WING PLUS DUCTED PROPELLER
254	TW/DP	90	D/E	H/T	P	F	X	X														ANALYSIS OF FLT CHAR (VZ-4 AND VZ-2)
258	DP	63	A	T	-	-	X	X														SIMPLIFIED ANALYTICAL APPROACH FOR EVALUATING DYN STAB CHAR OF VTOL CONFIG
312	DP	68	E/A/PR	H/T	P	F		X														DEVELOPMENT FLT TESTS OF X-22A
317	DP	62	E/A	H/T	P	F	X															TRANSITION AND HOVER FLT CHAR (VZ-4)
324	DP	68	A	T	-	-		X	X	X												X-22A DYNAMICS IN TRANSITION. EQ OF MOTION FOR FLT TEST PARAMETER IDENTIFICATION
336	DP	61	T	H/L	-	-		X	X	X												HOVERING IN STILL AIR AND GUST COND. GLIDE APPROACHES AT LOW SPEED. DAMPING AND SENSITIVITY
365	DP	66	DIR	T	-	-		X	X	X	X											REVIEW OF TEST RESULTS WITH EMPHASIS ON STAB AND CONT CHAR.
418	DP	62	E/A	H/T/C	M	WT	X		X	X												STATIC STAB AND CONT CHAR OF CONFIG WITH 4 TILTING DUCTED PROPS, MOUNTED IN TANDEM PAIRS
419	DP	68	D	H/T/C	-	-	X		X													PROBS ENCOUNTERED BY FAN VTOL AIRCRAFT
428	DP	68	R/P/R/A	H/T	SIM	SIM		X														3 TYPES OF GROUND-BASED SIMULATORS OF THE X-22A EVALUATED AND COMPARED WITH ACTUAL FLIGHT
436	DP	62	E/A	S	C	WT	X	X														WING PLUS DUCTED PROPELLERS, EXTENSIVE DUCT TESTS (VZ-4)
446	DP	63	E/A	S	M	WT	X		X													4-DUCT TANDEM VTOL CONFIG
453	DP	66	E/A	H/T/C	M	WT	X	X	X	X												FREE-FLT TESTS OF A 1/18 SCALE MODEL OF A 4-DUCT TANDEM V/STOL TRANSPORT
469	DP	61	E/A	H/T	M	F		X	X	X	X											4-DUCT MODEL
470	DP	61	E/A	H/T	M	F		X	X	X	X											2-DUCT MODEL
472	DP	60	E/A	T	M	WT	X		X													JEEP-TYPE VEHICLE
475	DP	63	D/E	S	M	WT	X		X													X-22A DESIGN DESCRIPTION
482	DP	64	E	H	M	WT		X														FULL-SCALE HALF-MODEL SIMULATION OF A DUAL TANDEM DUCTED PROPELLER AIRCRAFT. DOWNWASH ALLEVIATION
495	DP	68	E/A	H	I/A	WT	X		X	X	X											MODEL SIMILAR TO X-22A. LONG AND LAT TRANSIENT RESPONSE USING A DYNAMIC MODEL. COMPARISON OF L. DRAG, PITCH MOM, OF ISOLATED DUCT
496	DP	68	E/A	T	M	WT		X	X	X	X											MODEL SIMILAR TO X-22A. LONG TRANSIENT RESPONSE USING A DYNAMIC MODEL. TIME HISTORIES OF MODEL MOTION IN VARIOUS LONG DEGREES OF FREEDOM
497	DP	68	E/A	LS	M	WT		X	X	X	X											X-22A. LAT DIR DYN STAB OF DUCTED-PROP. QUAD CONFIG. TIME HISTORIES
507	DP	60	E/P	S	P	F	X	X	X	X	X											FLIGHT-TEST REPORT (VZ-4)

* See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT REGIME OF AIRCRAFT	TEST ARTICLE	TYPE OF TEST	FACTS AND ASSUMPTIONS	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS				
									Wing	Fuselage	Propeller	Engine	Control	Longitudinal	Lateral/Directional	Dynamic	Subsidence	Structural		Operative Effects	Area of Low Speed Control/Systems	Handling Qualities	Manding Qualities
1A (CONTD)	556	DP	E/A	T	M	WT	X															JEOP-TYPE VEHICLE	
	561	DP	E/A	H	M	WT	X																TRENDS IN LIFT, PITCHING MOM., AND ROLLING MOM. DUE TO GROUND EFFECT
	571	DP	E/A	T	M	WT																	LAT AND DIR CHAR OF A 4-DUCT PROPELLER VTOL MODEL IN GROUND EFFECT
	572	DP	E/A	H/T/C	M	WT	X																LONG AERO AND CONTROL CHAR OF DUCTED-PROP. VTOL MODEL
	586	DP	E/A	S	P	F	X																CONVERSION MANEUVER (VZ-4)
	618	DP	D/E	S	P	ST/E	X																DESCRIPTION AND INITIAL FLT. TEST FINDINGS (VZ-4)
	663	DP	A/T/E	T/C	P/C	F/PMT																	LAT STAB DERIVS (VZ-4)
	664	DP	A/T/E	T/C	P/C	F/PMT																	LONG STAB DERIVS (VZ-4)
	673	DP	E/A	S	C	WT	X	X															WING PLUS DUCTED PROPELLER GENERAL OVERALL DATA (VZ-4)
	674	DP	E/A	T	C	WT	X	X															WING PLUS DUCTED PROPELLER. TRANSITION CONDITIONS (VZ-4)
1.B	64	TP	A/E	S	-	-																	FLYING QUALITIES REPORT FOR KAMAN K-168
	78	TP	D/A	S	P	-	X																X-19 (DUAL-TANDEM FREE-TILTING PROPELLERS)
	102	TP	D	LS	P/PW	F/PMT																	DORNIER DO-29 (AGARD SYMPOSIUM PAPER)
	257	S	R/D	H/S	-	-																	LOW-SPEED CONT. SYS. REQ. FOR VTOL. GUIDANCE, ERGO. ATTITUDE CONT., GENERATION OF MOM. DISCUSSED. STABILIZATION DEVICES. CONT. SYS. OF GER. VJ101. TILT-ENGINE CONFIG. DESCRIBED.
	373	TP	T	H/T	-	-	X	X															FORCES AND MOMENTS ON PROPELLER AT ANGLE OF ATTACK
	377	TP	T	T/C	-	-																	LARGE TILT ANGLE LIFTING-SURFACE THEORY. DOWNWASH ANGLES AT TAIL NOT ACCURATELY PREDICTED AT HIGH ANGLES
	570	TP/TW	E/A	T/LS/C	M	WT	X																DETERMINATION OF LIM VALUES ON TRANSITION STALLING CHAR. RATIO OF WING CHORD TO PROP DIAM VARIED
	679	TP	A/E	T	-	-																	FLYING-QUALITIES REPORT FOR KAMAN K-168. DYN STAB. IN TRANSITIONAL FLT.
1.B	65	TS	E/A	H	M	F																	LOCKHEED "POGO" (KFV-1)
	66	TS	E/A	H	M	F																	LOCKHEED "POGO" (KFV-1)
	784	TS	R/A	H/T	-	-	X																STAB. AND CONT. CHAR. OF TAIL LITTER AIRCRAFT
2.1	5	DJ/L+P	A/D	H/T/C	-	-																	COND. NECESSARY FOR GOOD PERFORMANCE AND STAB. AND CONTROL CHAR. FOR JET V/STOL AIRCRAFT
	33	DJ	PR	S	P	F																	HAWKER P-1127. HOVER TIME HISTORY
	59	DJ/L+P	T/A	H/T	-	-	X																SEMI-EMPIRICAL APPROACH PREDICTING PERF. LOSSES AND PITCH MOM. DUE TO JET INTERFERENCE EFFECTS

* See table 9B for key to summary

TABLE 9-A (CONTD)*

2.1 (CONTD)	REPORT NUMBER	YEAR OF PUBLICATION	V/TOL CONCEPT	NATURE OF REPORT MATERIAL	PILOT MODEL	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS
							STABILITY AND CONTROL										
							Roll	Pitch	Yaw	Roll/Pitch	Pitch/Yaw	Roll/Yaw	Control	Control/Power	Control/Control	Control/Control	
81	DJL+P	E/A	E/A	H	M	WT											STATIC PRESS. DISTRIB ON WALL AROUND A CIRC JET EXHAUSTING NORMALLY FROM PLANE WALL INTO AIRSTREAM
89	DJ	E/A	E/A	T	M	WT	X										JET LOCATION INTERFERENCE EFFECTS ON LONG AERO CHAR. OF A JET V/TOL MODEL.
100	DJ	R/A	T	T	-	-											REORGANIZATION OF THRUST MANAGEMENT CONTROLS FOR VECTORED-THRUST V/TOL VEHICLES DISCUSSED
112	DJ	E	E	H	M	WT											SINGLE- AND DOUBLE-JET MODELS. GROUND EFFECTS ON PERFORMANCE
180	DJ	E/APR	H	H	P	F/SIM											X-14A. UTILITY OF DIRECT SIDE-FORCE MANEUVERING DEVICE FOR V/TOL AIRCRAFT P-1127 (KESTREL). LOG TECHNIQUES, STAB. IN HOVER AND ACCELERATING TRANSITION, ROUGH GRD OPERATION, NIGHT FLYING
196	DJ	DPR	H/TIC	H/TIC	PH	F											JET DEFLECTOR TESTS AND COMMENTS
228	DJ	E/A	STLS	C	ST/MT												DORMIER DO-31. JET-LIFT CONCEPT
288	DJL+P	R	S	-	-	-											"IMVED" CONTROL SYSTEM TO HOVER UNSTABILIZED JET-LIFT AIRCRAFT. CONTROL SYSTEM NOW A FUNCTION OF STICK POS AND RATE OF CHANGE OF STICK POS
289	DJL+P	A	H	-	-	-											DESIGN OPTIMIZATION OF V/TOL DIRECT LIFT TRANSPORT. DESIGN PROBS OF PROPULSION, HANDLING QUALITIES, TRM IN HOVER AND TRANSITION, GRD EFFECTS
314	E/W DJL+P	R/D	H/TIC	-	-	-											EFFECT OF VARYING AERO DERIVS FOR 4 FLT COND ON STAB. AND CONTROL OF XV-4B
316	DJ	A	S	S	SIM	SIM											AERO CHAR OF V/TOL AIRPLANE WITH JET VECTOR FOR AUGMENTING LIFT
323	DJ	E/A	H/TIC	M	WT	X											JET LIFT AND/OR LIFT-FAN V/TOL AERO ANALYZED. SIM MODEL OF JET EFFLUX SUPERIMPOSED ON REP OF VEH GEOM. VORTEX LATTICE TECHNIQUE DISCUSSED. APPL TO P-1127, THEO AND TEST COMP
360	F/W DJL+P	A/D	H	-	-	-											AERODYNAMICS AND FLYING QUALITIES. JET INTERFERENCE. EFF OF MULTIPLE JETS AND GRD, AND INLET LIP SHAPE
389	DJL+P	R/D	H	-	-	-											AERO CHAR OF A 5-JET V/TOL CONFIG. HORIZ/TAI POSITION EFFECTS. GRD PROXIMITY
387	DJL+P	E/A	T	M	WT	X											FLT INVESTIGATION OF STAB AUGMENTATION SYSTEMS FOR P-1127 JET-LIFT V/TOL AIRCRAFT, WITH VARIABLE STAB. HELICOPTER
408	DJ	E/A	LS	SIM	SIM												AERODYNAMICS AND FLYING QUALITIES. JET INTERFERENCE. EFF OF MULTIPLE JETS AND WING PLANFORM. INLET EFFECTS. INGESTION CONTROL POWER
414	DJL+P	R/D	LS	-	-	-											PROBS OF FAN V/TOL AIRCRAFT
419	F/W/ D/DJ	D	H/TIC	-	-	-											FLT EVALUATION OF P-1127 (XV-8A)
421	DJ	E/APR	H/TIC	E	F												SEMI SPAN MODEL OF CLOSE SUPPORT V/TOL. INTEGRATED PROPULSION AND/OR LIFTING SURFACE SYSTEM
428	DJL+P	E	LS	M	WT	X											SUMMARY OF XV-4A V/TOL RESEARCH. RESULTS OF FLT TEST. DESIGN SYSTEMS. SMALL- AND LARGE-SCALE WT TEST
488	DJ	R/D	H/TIC	-	-	-											MUTUAL INTERFERENCE BETWEEN NOZZLE SYS. W/S COMBINATIONS. AND FREE STREAM. BASIC FUS AND SERIES OF WINGS. JET-INDUCED DOWNLOAD AND PITCH MOM. OUT OF GRD EFF
484	DJL+P	E/A	H	M	WT	X											BELL X-14
520	DJ	D/E	S	P	F	X											DYN STAB AND CONT CHAR. OF A VECTORED-THRUST V/TOL MODEL. FLT SIMULATION
553	DJ	E/A	H/TIC	M	SIM												

* See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/TOL CONCEPT	NATURE OF REPORT MATERIAL	RIGHT REGIME ON AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS																	COMMENTS									
								FACE AND MOMENT							STABILITY AND CONTROL																			
								Wing	Free Propeller	Two Dimensional Data	Pressure Data	Max. Lift or Turning	Control Effect	Propeller Moment	Control	Longitudinal	Lateral Directional	Dynamic	Stabilization	Steadiness	Oversteer Effect	Lift or Low Response Control/Systems	Handling Qualities	Critical										
2.1 (CONT)	568	61	DJ	E/A	H/T	M	WT	X					X																				JET INTERFERENCE EFFECTS ON DELTA-WING MODEL	
	574	65	JF/L+P	A	H/C	M	WT	X					X																				INTEGRATED PROPELLION LIFTING SURFACE SYSTEM, COMPARISONS WITH THEORY	
	578	65	DJ	E/A	T	-	-	X																									LONG AND LATOUR CHAR DE 2.4-JET VECTORED-THRUST-TYPE VTOL MODELS	
	583	65	S	R/D	H/T/C	-	-																										VISTOL AERO RESEARCH AT RAE, 1962-66: JET LIFT, FAN LIFT, D.L.C., JET FLAPS, GRD SIM., WT TEST TECHNIQUES	
	581	68	DJ	A	H/T	-	-																										STAB INVESTIGATION OF VECTORED-THRUST P-1127. EXPRESSIONS DERIVED FOR STAB DERIVS	
	587	68	DJ/L+P	R/A	H/L/S	-	-	X					X																				AERO INTERFERENCE EFF DUE TO JET EFFLUX, STATIC INTERFERENCE EFF, FWD-SPEED INTERFERENCE EFF, THEORY FOR JET-EFFLUX INTERFERENCE	
2.2	5	66	DJ/L+P	A/D	H/T/C	-	-																										COND NECESSARY FOR GOOD PERFORMANCE AND STAB AND CONTROL CHAR FOR JET VTOL AIRCRAFT	
	56	68	DJ/L+P	T/A	H/T	-	-																										SEMIEMPIRICAL APPROACH PREDICTING PERF LOSSES AND PITCH MOM DUE TO JET INTERFERENCE EFFECTS	
	81	64	DJ/L+P	E/A	H	M	WT						X																				STATIC PRESS DISTRIB ON WALL AROUND A CIRC JET EXHAUSTING NORMALLY FROM PLANE WALL INTO AIRSTREAM	
	104	65	L+P	A/P/R	H/T/C	P/M	F																										SHORT SC-1: PERFORMANCE, STAB., AND CONTROL, ESPECIALLY IN HOVER AND TRANSITION	
	115	60	L+P	D	S	P	F																										SHORT SC-1: DETAILED AIRCRAFT SCHEMATIC	
	198	62	L+P	D	H/T	P	F	X																									SHORT SC-1	
	201	62	L+P	D	H/T	P	F	X																									SHORT SC-1	
	208	64	DJ/L+D	R	S	-	-																											DORNIER DO-31: JET-LIFT CONCEPT
	208*	64	DJ/L+D	A	H	-	-																											"MIXED" CONTROL SYSTEM TO HOVER UNSTABILIZED JET-LIFT AIRCRAFT, CONTROL SYSTEM MOM A FUNCTION OF STICK POS AND RATE OF CHANGE OF STICK POS
	208	63	L+P	E/A/D	H/L/S	P	F																											RESEARCH FLT-TEST RESULTS ON SC-1: FLYING QUALITIES
	208	69	L+P	R	H/L/S	-	-																											SERIES OF TESTS ON SC-1 VARIABLE STAB VTOL
	314	63	DJ/L+P	R/D	H/T/C	-	-																											DESIGN OPTIMIZATION OF VISTOL DIRECT-LIFT TRANSPORT, DESIGN PRORS OF PROPELLION, HANDLING QUALITIES, TRIM IN HOVER AND TRANSITION, GRD EFFECTS
	350	68	F/W/ DJ/L+P	A/D	H	-	-																											JET LIFT AND/OR LIFT FAN VISTOL AERODYNAMICS ANALYZED, SIM MODEL OF JET EFFLUX SUPERIMPOSED ON REPRESENTATION OF VEHICLE GEOM, VORTEX LATTICE TECHNIQUE DISCUSSED, APPLIED TO P-1127, SHREVEY AND TEST COMPARED
	382	65	DJ/L+P	R/D	H	-	-																											AERODYNAMICS OF JET VTOL ENGINE INSTALLATIONS, JET INDUCED EFF, EFF OF JET WAKE, GRD, AND INLET LIP SHAPE
	372	62	L+P	D	T	P	F																											SHORT SC-1
	387	68	DJ/L+P	E/A	T	M	WT	X																										AERO CHAR OF A JET VTOL CONFIG, HORIZ-TAIL POSITION EFFECTS, GRD PROXIMITY AERODYNAMICS AND FLYING QUALITIES, JET INTERFERENCE EFF OF MULTIPLE JETS AND WING PLANFORM, INLET EFFECTS, INGESTION, CONTROL POWER
	414	64	DJ/L+P	R/D	L/S	-	-																											SEMI-SPAN MODEL, INTEGRATED PROPELLION-LIFTING SURFACE SYSTEM
	427	64	L+P	A/E	L/S	M	WT	X																										

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V-STOL CONCERN	NATURE OF REPORT OR MATERIAL	FLIGHT REGIME OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS					
								Wing Area and Moment	Wing Plan Form	Dural Properties	Thin-Dimensional Data	Pressure Data	Max. Lift or Thrust	Ground Effect	Power/Drag Ratio	Control	Longitudinal	Lateral/Directional		Dynamics	Stabilization	Situations	Optoelect. Effect	Eng or the Airplane
2.2 (CONT)	428	65	DJ/L+P	E	LS	M	WT	X																SEMISPAN MODEL OF CLOSE-SUPPORT VTOL INTEGRATED PROPELLION AND/OR LIFTING SURFACE SYSTEM
	484	62	DJ/L+P	E/A	H	M	WT	X																MUTUAL INTERFERENCE BETWEEN NOZZLE SYS, WB COMBINATIONS, AND FREE STREAM. BASIC PLUS SERIES OF WINGS, JET INDUCED DOWN LOAD AND PITCH MOMENT. OUT OF GRD EFF
	577	66	L+P	A	M	-	-							X										PROPELLION SYS AND/OR CONTROL SYS INTERFACE FOR HOVER CONTROL. CONCEPTS, USING LIP* PLUS LIFT-CRUISE PROPELLION
	585	66	L+P	E/A	H/T/C	M	WT	X							X									XV-48 POWERED INTERFERENCE EFFECTS IN AND OUT OF GRD IN LANGLEY LOW-SPEED TUNNEL. BASIC DATA IN CRUISE IN LANGLEY HIGH-SPEED TUNNEL
	610	68	L+P	E/A	T	M	WT	X																ROLL STAB OF SHORT SC-1
	626	64	L+P	E/A	LS	M	WT	X																INTERFERENCE EFF BETWEEN LIFTING JETS, FREE STREAM VELOCITY, AND MODEL SURFACES AT LOW FWD SPEEDS. EFF ON LONG, AERO CHAR. VARIOUS JET CONFIG AND WING HEIGHTS. GRD EFF.
	653	66	S	R/D	H/T/C	-	-																	USTOL AERO RESEARCH AT RAE, 1962-68. JET LIFT, FAN LIFT, BLC, JET FLAPS, GRD SIM, W.T TEST TECHNIQUES
	659	66	L+P	E/A	T/C	M	WT																	LONG AND LATERAL CHAR OF JET-LIFT MODEL. GRD EFF. CONTROL EFFECTIVENESS. EFF OF POWER VARIATIONS OF LIFT JETS
	667	68	DJ/L+P	R/A	H/LS	-	-	X																AERO INTERFERENCE EFF DUE TO JET FLOW, STATIC INTERFERENCE EFF. FWD-SPEED INTERFERENCE EFF. THEORY FOR JET/FLUX INTERFERENCE
2.3	671	63	L+P	E/A	H/LS	M	WT						X											SHORT SC-1. THRUST LOSS AS FUNCTION OF WING HT ABOVE GRD FOR JET-LIFT SCHEMES. THRUST LOSS REDUCTION
	222	63	TS/DSS	PR	S	2P	F	X																X-13 AND VZ-3
	284	58	TS	R/D	H	-	-																	STAB AND CONTROL CHAR OF VERTICAL-ALTITUDE VTOL AIRCRAFT
	388	57	TS	E/A	H/T	PM	F/WT																	X-13. WING POSITION AND VERTICAL-TAIL POSITION VARIED
	543	60	TS	E/A	LS	PM	WT																	X-13
	554	58	TS	E/A	H/T	PM	WT																	X-13
	556	61	TS	E/A	H/T	PM	F																	WINGLESS JET VTOL TRANSPORT MODEL
2.4	420	59	TE	E/A	LS	M	WT	X																LIFT AUGMENTATION BY SPANWISE BLOWING OVER A LIFTING SURFACE
2.5	199	60	BLC	E/D	LS	M	WT																	SIMILAR TO FIDM LE AND FLAP BLOWING
	422	60	BLC	E/A/T	LS	M	WT	X																STOL AIRCRAFT EQUIPPED WITH EXTERNAL FLOW JET FLAP
	473	60	JF	E/A	LS/C	M	WT	X																INCR OF LIFT BY BLOWING BLC. JET MOMENTUM REQ TO PREVENT SEP. SURVEY ON SYSTEMATIC MEAS.
	597	62	BLC/JF	T/E/A	LS	M	WT	X	X															VTOL AERO RESEARCH AT GAU, 1962-66. JET LIFT, FAN LIFT, BLC, JET FLAP, GRD SIM. W.T TEST TECHNIQUES
	653	66	S	R/D	H/T/C	-	-																	XV-6A FLT SIM STUDY OF HOVERING UNDER GUSTY COND. OPTIMIZATION OF STAB AUGMENTATION GAINS
3.1	24	65	FIN	E/P/R/A	H	SIM	SIM																	XV-6A, FULL SCALE. CONTROL EFFECTIVENESS IN ALL 3 MODES
	26	66	FIN	E	H/T/C	M	WT	X																

* See table 9B for key to symbols.

TABLE 9-A (CONT'D)*

REPORT NUMBER	CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT PROFILE OF AIRCRAFT	TEST ARTICLE	TYPE OF TEST	Force and Moment	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS				
										Wind Tunnel	Free Flight	Drop	Parachute	Tethered	Stability and Control				Longitudinal	Lateral/Directional	Dynamic		Structural	Propulsion	Other	
															General	Rolling Derivatives	Yaw/Directional	Dive/Control								Force/Control
29	CONF			E/A	ST	M	ST	WT		X															INVESTIGATION OF THRUST LOSS	
34	CONF			E/P/R/A	H/T/C	P	F																		XV-8A FAN-IN-WING V/STOL AIRCRAFT	
35	CONF			E/P/R/A	H/T/C	P	F																		XV-8A FAN-IN-WING V/STOL AIRCRAFT	
36	CONF			E/P/R/A	H/T/C	P	F																		APPENDIX OF PLOTTED GRAPHS PERTAINING TO VOLS I AND II OF G.E. REPT 108	
41	CONF			E/A	ST	M	ST	X																	LARGESCALE TEST DATA	
43	CONF			E/A	-	M	WT/ST	X																	VERTOL	
45	CONF			E/D/A	H/T	M	WT	X																	DYN STAB CHAR OF XV-8A BASED ON THEOR AND EMPIRICAL EST OF DYN AND STATIC DERIVS FROM WT TESTS. CONVENTIONAL FLT.	
46	CONF			E/T/A	C	M	WT																		XV-8A. EST. STATIC STAB AND CONTROL	
47	CONF			E/A/T	H/T/C	M	WT																		TIP-TURBINE DRIVEN LIFT-FAN SYS. SIZ. STATIC PERFORM. WT EVALUATION. GRD-EFF EVALUATION. F/W STATIC PERFORM. WT EVALUATION. WT RESEARCH	
49	CONF			P/F/F/W	D	LS	-	-																	WT TESTS OF VERTODYNE RESEARCH AIRCRAFT. FAN-THRUST VARIATION. GRD EFF WING SURFACE PRESSURES	
51	CONF			E/A	H/T	M	ST/WT	X																	VERTODYNE. STATIC AND FWD-SPEED TESTS. WING SURFACE PRESSURES, FORCES AND MOM	
53	CONF			E/A	ST/C	M	ST/WT	X																	STATIC AND DYN LONG. STAB OF VTOL AIRCRAFT	
55	CONF			E/A	T/L/S	M	WT																		XV-8A SIMULATION PROGRAM. DESIGN PROBS SOLVED BY SIMULATION	
57	CONF			R/D/A	H/T/C	-	-	-																	DUCTED FAN AS LIFTING DEVICE IN FWD FLT	
59	CONF			E/A/T	T	M	WT	X																	TECHNIQUE AND COMPUTATION FOR POTENTIAL-FLOW SOLUTION OF 3-DIM V/STOL AIRCRAFT. TRANSITIONAL SIM STUDY	
61	CONF			D	T	-	-	-																	INFLUENCE OF FAN EFFLUX FLOW ON LIFT AND PITCH MOMENT OF F/W. WING. AND TAIL PLANE	
63	CONF			E/D/A	LS	M	WT	X																	LARGESCALE CONFIGURATION TESTED AND ANALYZED. GEN. STATIC AND DYN. STAB AND CONT. STRIKE AIRCRAFT AND ASSAULT TRANSPORT ANALYZED.	
65	CONF			E/A	H/T/C	M	WT	X																	GRD EFF ON F/W CONFIG	
67	CONF			E/A	H	M	ST	X																	WING SIZE VARIED	
69	CONF			E/A	ST	M	ST	X																	EFF OF LIFT-FAN AND CRUISE-FAN VARIABLES ON AERO CHAR	
71	CONF			E/A	LS	M	WT	X																	CALCULATION OF AERO. COEFF. OF F/W AIRBOIL.	
73	CONF			E/A	T	C	WT	X																	AERO CHAR OF DIRECT-LIFT FANS IN WING PANELS. EFF OF FAN OPERATION. THRUST CONTROL BY FAN EFFLUX ON LONG CHAR. DOWNWASH AT TAIL	
75	CONF			E/A	T	LS	-	-																		
77	CONF			E/A	E	M	WT																			

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	TYPE OF PUBLICATION	VISTOL CONCEPT	MATERIAL OF BROUPT MATERIAL	RIGHT BRIDGE OR AIRFRAME	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS
								STABILITY AND CONTROL										
								Wing	Fuselage	Horizontal Tail	Vertical Tail	Propeller	Power Plant	Control Surfaces	Ground Effect	Wingtip Vortices	Other	
277	67	FW/IF	D	T	-	-	X	X	X	X	X	X	X	X	X	X	COMPREHENSIVE ENGINE RESEARCH PROGRAM TO DEFINE AERO CHAR OF LIFT-FAN VISTOL AIRCRAFT	
278	63	FW/IF	A/E	T	M	WT	X	X	X	X	X	X	X	X	X	X	PERFORMANCE ESTIMATION METHODS GIVEN	
280	57	FW	E	M/S	M	BT/WT	X	X	X	X	X	X	X	X	X	X	INITIAL INVESTIGATION OF F/W CONCEPT	
281	59	FW	E/A	BT/T	C	WT	X	X	X	X	X	X	X	X	X	X	PROPELLER ALSO TESTED SEPARATELY	
282	67	FW	T	HT/C	-	-	-	-	-	-	-	-	-	-	-	-	DIGITAL COMPUTER PROGRAM TO STUDY AERO CHAR, FLOW CHARTS, INPUT DATA FORMATS	
283	63	FW	R/D	S	-	-	X	X	X	X	X	X	X	X	X	X	SURVEY OF TECHNOLOGICAL STATE-OF-THE-ART FOR F/W CONCEPT	
288	63	FW	T/A/D/E	H/T	M	WT	X	X	X	X	X	X	X	X	X	X	MANY PERF DESIGN GRAPHS	
314	63	D/J-L-P	R/D	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	DESIGN OPTIMIZATION OF VISTOL, DIRECT-LIFT, TRANSPORT, DESIGN PROBS OF PROPULSION, HANDLING QUALITIES, TURN IN TOYER, AND T. TRANSITION, GRD EFFECTS	
328	66	FW	E	H/T/C	M	WT	X	X	X	X	X	X	X	X	X	X	BTAB AND CONT CHAR IN HOVERING AND TRANSITION ON F/W MODEL	
322	64	FW	E/A	H/T	M	WT	X	X	X	X	X	X	X	X	X	X	LARGE-SCALE INVESTIGATION OF F/W CONCEPT, GEN AERO CHAR IN AND OUT OF GRD EFF	
324	67	FW	E/A	LS	-	-	X	X	X	X	X	X	X	X	X	X	AERO CHAR OF VISTOL, TRANSPORT, EFF OF ENGINE PLACEMENT, 6 WING FANS AND 2 LIFT-CRUISE ENGINES IN F/W, FAN FLOW-FIELD INTERFERENCE	
344	66	FW	A	T	-	SHM	-	-	-	-	-	-	-	-	-	-	ANALOG SIMULATION OF XV-8A DYN BTAB CHAR	
360	66	D/J-L-P	A/D	H	-	-	-	-	-	-	-	-	-	-	-	-	JET LIFT AND/OR LIFT-FAN VISTOL AERODYNAMICS ANALYZED, SIM MODEL OF JET EFFLUX SUPERIMPOSED ON REPRESENTATION OF VEHICLE GEOM, VORTEX LATTICE TECHNIQUE DISCUSSED, APPLIED TO P-1127 THEORY AND LABEL COMPARED	
371	67	FW	E/P/R/A	H/T/C	PM	F	X	X	X	X	X	X	X	X	X	X	FLIGHT EVALUATION OF HANDLING QUALITIES OF XV-8A	
401	64	FW	T/A	T	-	-	X	X	X	X	X	X	X	X	X	X	THREE-DIMENSIONAL ANALYSIS OF F/W LIFT	
408	61	FW	T	LS	-	-	-	-	-	-	-	-	-	-	-	-	LIFTING-SURFACE THEORY	
416	66	FW	E/A	LS	M	WT	-	-	-	-	-	-	-	-	-	-	EXPLORATORY TESTS OF FAN-POWERED VISTOL CONFIG, EFFICIENTLY PRODUCING LARGE LIFT FORCES AT LOW SPEEDS	
419	66	FW/DP/DJ	D	H/T/C	-	-	X	X	X	X	X	X	X	X	X	X	PROBS OF FAN VISTOL AIRCRAFT	
434	65	FW	A	-	-	-	-	-	-	-	-	-	-	-	-	-	METHOD FOR LIFTING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES, STAB AND CONT, GRD EFF, AND W-T CORRECTIONS	
439	66	DP/FFW	A/E	AZ/IN-AX	C	WT	X	X	X	X	X	X	X	X	X	X	TWO-DIM TREATMENT OF DECR IN LIFT AT LOW FWD SPEEDS, COMPARED WITH 2-DIM TEST DATA	
469	62	FW	T	LS	-	-	-	-	-	-	-	-	-	-	-	-	LIFT-FAN CONCEPT	
484	65	FW/IF	R/D	S	-	-	-	-	-	-	-	-	-	-	-	-	INCOMPRESSIBLE POTENTIAL-FLOW THEORY FOR DETERMINING AERO CHAR, THEORY AND APPLICATION	
525	67	FW	T	H/T	-	-	-	-	-	-	-	-	-	-	-	-	ANALYSIS OF ASYMMETRIC FLOW IN LIFT-FAN IN STATIC OPERATION BASED ON DOUGLAS INCOMPRESSIBLE POTENTIAL-FLOW COMPUTER PROGRAM	
560	66	FW	A/T	S	-	-	-	-	-	-	-	-	-	-	-	-	INCOMPRESSIBLE POTENTIAL-FLOW COMPUTER PROGRAM	

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT INDEX CLASSIFICATION	REFERENCE NUMBER	TITLE OR PUBLICATION	V/TOL CONCERN	NATURE OF REPORT MATERIAL	POINT SOURCE OR MEDIUM	TEST ARTICLES	TYPE OF TEST	Wing	Free Propeller	Duct Propeller	Two Dimensional Data	Pressure Data	Max. Lift at Various	Overall Effect	Rotor Position	Control	STABILITY AND CONTROL											COMMENTS
																	AREAS OF INVESTIGATION OR ANALYSIS											
																	Longitudinal	Lateral Directional	Dynamic	Static	Stability	Directional	Control/Control	Handed/Control	Handed/Control	Heading/Control	Heading/Control	
3.1 (CONT'D)	813	FW	A	H/TIC	-	-	X				X								X						PRELIM "IN-DEPTH" DESIGN OF ADVANCED LIFT FAN PROPULSION SYSTEM			
	816	FW	E/A	H	M	WT	X				X															GRD EFF ON PERP OF LIFTING FAN		
	818	FW	D	T	P	WT	X																			SHAFT-DRIVEN FAN IN WING (VANGUARD)		
	833	FW	A/D	H/T	-	-	X																					
	834	FW	E/A/T	H/T	C	WT	X			X																		
	835	FW	E/A/T	H/T	C	WT	X			X																		
	863	S	R/D	H/TIC	-	-																						
3.2	42	FIF	E/A	H/T	M	WT	X			X																	LONG CHAR OF LARGE SCALE MODEL FAN SUPPORTED F.L.T FROM 0 TO 100 KNOTS. STATIC PRESS DISTRIB. DOWN WASH AT HORIZ TAIL	
	58	FIF	E/A	H/T	M	WT	X			X																		
	80	FI/FFIM	D	LS	-	-																						
	146	FIF	E/A	LS	M	WT	X			X																		
	153	FIF	E/A	LS	M	WT	X			X																		
	228	FI/FFIF	E/A	H/TIC	M	WT	X			X																		
	277	FI/FFIF	D	T	-	-	X			X																		
	278	FI/FFIF	A/E	T	M	WT	X																					
	320	FIF	D/E	H/T	M	F					X																	
	370	FIF	E	LS/T	M	WT	X																					
	388	FIF	E/A	T	M	WT	X			X																		
	484	FI/FFIF	R/D	S	-	-																						
	483	FIF	E/D	LS	M	WT				X																		
	812	FIF	E/A	LS	M	WT	X																					
	863	S	R/D	H/TIC	-	-																						
4.1	70	-	E/A	AX/LS	C	WT	X																				LOW SPEED, HIGH-THRUST PROPELLERS, DUAL ROTATION	
	71	-	E/A	AX	C	WT	X																					SINGLE AND DUAL TRACTOR PROPELLERS, WIDE BLADES

* See table 9B for key to summary

TABLE 9.A. (CONT'D)*

CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT OR MATERIAL	RIGHT REGIME OR ANGLE	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS		
								Wing		Fuselage and Landing Gear		Propeller		Rotor		Engine			Other	
								Wing	Fuselage and Landing Gear	Propeller	Rotor	Engine	Other	Other	Other	Other	Other		Other	
4.1 (CONT)	105	89	FP	T	T	-	X	X	X	X	X	X	X	X	X	X	X	METHOD FOR CALCULATING FORCE, MOM, AND POWER COEFFS OF PROPELLERS IN OBLIQUE FLOW		
	119	87	-	T/A	ST/AX	-	-	X	X	X	X	X	X	X	X	X	X	V/STOL PROPELLER SELECTION		
	120	86	-	T/A	ST	-	-	X	X	X	X	X	X	X	X	X	X	PROPELLER STATIC THRUST		
	126	82	-	T/A	N-AX	-	X	X	X	X	X	X	X	X	X	X	X	PROPELLER IN YAW (PITCH)		
	150	86	FP	E/A	H/T	C	ST	X	X	X	X	X	X	X	X	X	X	MONOCYCLIC PROPELLER PITCH FOR LONG CONTROL		
	154	84	-	T	LS	-	X	X	X	X	X	X	X	X	X	X	X	FORCE AND MOM DERIVED DUE TO FREE PROPELLER INCLINED TO FREE STREAM		
	185	86	TP	T	H/T/C	-	X	X	X	X	X	X	X	X	X	X	X	GEN FORCE AND MOM DEVELOPED FOR MOD TO HIGH ANGLES OF INCIDENCE		
	171	86	S	T	C/S/T	-	-	X	X	X	X	X	X	X	X	X	X	RESEARCH ON PROP FLOW FIELD ASSOCIATED WITH TYPICAL V/STOL OPERATIONS: CRUISE		
	173	86	FP	T	ST	-	-	X	X	X	X	X	X	X	X	X	X	GEN THEORY FOR PERF CALCULATIONS OF VTOL PROPELLERS OPERATING IN STATIC COND		
	220	44	-	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	THRUST AND TORQUE, SINGLE AND DUAL-TRACTOR PROPELLERS		
	226	56	-	D/A	LS	-	X	X	X	X	X	X	X	X	X	X	X	AERO ASPECTS OF VTOL PROPELLERS		
	267	56	FP/DF	T/A	LS	-	-	X	X	X	X	X	X	X	X	X	X	PERF DIAGRAMS		
	306	88	-	T	0-90°	-	-	X	X	X	X	X	X	X	X	X	X	SIMPLE METHOD TO PREDICT PROP FORCES AND PITCH MOM		
	373	87	TP	T	H/T	-	X	X	X	X	X	X	X	X	X	X	X	APPROACH TO DETERMINE FORCES AND MOM ON PROPS AT HIGH ANGLES OF ATTACK		
	423	84	-	E/A	0-180°	C	WT	X	X	X	X	X	X	X	X	X	X	4-BLADED PROPELLER		
	437	83	TP	E/A	H/T/C	M	ST	X	X	X	X	X	X	X	X	X	X	EFFECTIVENESS OF MONOCYCLING VARYING BLADE ANGLE FOR LONG CONTROL: BASIC AERO CHAR OF SAME PROP IN X-LAPPING AND RIGID CONFIG		
	476	81	S	T/A/R	LS	-	-	X	X	X	X	X	X	X	X	X	X	APPLICATION OF SMALL PROP DATA		
	489	48	-	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	4 DIFFERENT 2-BLADED PROPS TESTED		
	490	48	FP/DF	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	"PROPELLERS IN YAW" (RIBNER)		
	512	46	-	T/A	N-AX	-	X	X	X	X	X	X	X	X	X	X	X	GENERALIZED PROP PERF		
	545	58	S	T/A	AX/N-AX	-	X	X	X	X	X	X	X	X	X	X	X	FORCES AND MOM ACTING ON PROP CENTER WERE TESTED FOR WIDE RANGE OF ADVANCE RATIO, PROPELLER ATTITUDE, AND BLADE PITCH SETTINGS		
	646	66	FP	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	WATER-TUNNEL PROP AXIS NORMAL TO FLOW: PHOTOS		
	647	61	-	E/A/T	N-AX	M	-	X	X	X	X	X	X	X	X	X	X	3 PROPS TESTED: EXTENSIVE POWER DATA		
	675	60	-	E/A	0-95°	C	WT	X	X	X	X	X	X	X	X	X	X			

* See table 9B for key to summary

TABLE 1-A (CONT'D)*

SUBJECT NUMBER	CLASSIFICATION	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF FRONT MATERIAL	NATURE OF AIRFLOW	TEST ARTICLE	TYPE OF TEST	WING AND AIRCRAFT	AREAS OF INVESTIGATION OR ANALYSIS													COMMENTS
									Stability and Control	Structural	Dynamic	Control	Propulsion	Performance	Control	Control	Control	Control	Control	Control	Control	
4.1 (CONT.)	618	63	-	E/A	LS	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	TWO VTOL PROPS IN DESCENT
4.2	19	60	DP	E/A	S	C	WT/ST	X	X	X	X	X	X	X	X	X	X	X	X	X	X	PERF CHARTS, WATER TESTS ALSO
	72	66	DP	R/A	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SUMMARY OF TEST RESULTS OF EXTENSIVE RESEARCH PROGRAM ON SHROUDED PROPS
	73	67	DP	E/A	H/T/C	M	WT/ST	X	X	X	X	X	X	X	X	X	X	X	X	X	X	EXTENSIVE SHROUDED-PROP RESEARCH PROGRAM
	85	62	DP	T/A/E	S	C	WT/ST	X	X	X	X	X	X	X	X	X	X	X	X	X	X	THE DUCTED FAN AS A LIFTING DEVICE IN FWD FLT
	166	60	DP/P/W	E/A/T	T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	NOMOGRAM ANALYSIS
	218	60	DP	T	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	RING-WING AND SEVERAL DUCTED PROPS IN NONAXIAL FLOW
	219	56	DP	E/A	ST/N-AX	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	THEORY FOR STEADY AERO LOADING ON DUCTED PROP IN STATIC AND LOW-SPEED FLT
	237	64	DP	T	LS/ST	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SHROUD THRUST AND SURFACE PRESS
	246	58	DP	E/A	S	C	ST/W/T	X	X	X	X	X	X	X	X	X	X	X	X	X	X	DATA FORM = 0 TO 0.6, MAX ANGLE OF ATTACK = 6°
	248	67	DP	E/A	N-AX	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	COMPRESSIBILITY EFFECTS
	268	55	DP	T	C	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	PERF DIAGRAM
	267	56	FP/DP	T/A	AX	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	POWERED-DUCT MODEL OF X-22A VTOL AIRCRAFT, FORCES AND MOM ON COMPLETE UNIT AND SHROUD ALONE, SHROUD, INTERNAL AND EXTERNAL PRESS, DISTRIB
	271	65	DP	E/A	H/T/C	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	DUCTED-PROP DESIGN METHOD (UNIV OF WICHITA)
	286	59	DP	E/A	S	C	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SEVERAL REPTS, FAMILY OF DUCTED PROPS (UNIV OF WICHITA) COMPARISON OF THEIR PREDICTIONS OF DUCT PRESS DISTRIB IN FWD FLT AND TEST RESULTS FOR X-22A DUCTED-PROP UNIT
	285	58	DP	E/A	ST/N-AX	C	ST/W/T	X	X	X	X	X	X	X	X	X	X	X	X	X	X	STATIC THRUST IMPROVEMENT METHOD
	292	65	DP	E/T/A	C	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	RELATED THRUST PROFILES TESTED TO DETERMINE EFF OF GEOM VARIABLES AND THRUST COEFF ON LIFT AND PITCH MOM.
	306	58	DP	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	X	LARGE-SCALE DUCTED PROPS USED TO EVAL THEOR METHODS, THRUST, NORMAL FORCE, PITCH MOM, DUCT PRESS
	307	64	DP	E/A	H/T	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	THEOR METHOD TO PREDICT FORCES, MOM, STAB DERIVS (STATIC AND DYN) OF ISOLATED DUCTED PROP AT ALL α°
	346	64	DP	E/T	LS	M	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	X	FORCE AND MOM COEFF AND DYN PITCH DERIVS PREDICTED BY POTENTIAL FLOW ANALYSIS
	347	63	DP	T	H/T/C	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	THEOR, STAB, DERIVS
	348	64	DP	A/T	A/H/T/C	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	348	64	DP	A/T	H/T/C	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	353	44	DP	E/A/T	ST/AX	C	ST/W/T	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

* See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VARIABLE CONCERN	NATURE OF REPORT OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	FORCE AND MOMENT	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS
								STABILITY AND CONTROL			OTHER AREAS								
								Roll	Pitch	Yaw	Longitudinal	Lateral/Directional	Dynamic	Stability	Oscillatory Effects	Flow or Low Speed	Handling Qualities	Handling Qualities	
4.2 (CONT)	384	DP	E/A	C	M	WT		X										SHORT-CHORD LOW-SOLIDITY DUCTED PROPS IN CRUISE COND PERFORM DATA IN PITCH	
	428	DP	E/A	AX/N-AX	C	WT	X	X										X-22A COMPONENT	
	438	DP/FW	E/A	AX/N-AX	C	WT	X	X										FORCE AND MOM DATA FOR 3 DUCTED-PROP CONFIG (SAME DUCT), STATIC AND FWD-SPEED COND	
	442	DP	E/A	H/C	M	ST/WT	X											PERF. DUCT PRESS. DISTRIB. AND PROP INFLOW DATA FOR TRACTOR AND PUSHER PROPELLERS	
	444	DP	E/A	H/L/S	M	ST/WT	X	X										3-DIM THEORY. EFF OF BLADE NO., CIRCULATION PROFILE AND STRENGTH, PROP ADV RATIO, TIP CLEARANCE	
	482	DP	T	AX	-	-												DUCT (WITH AND WITHOUT PROP)	
	487	DP	E/A	0-90°	C	WT	X	X										STAB AND CONT INVESTIGATION, STATIC-TYPE SHROUD	
	488	DP	E/A	STR/N-AX	C	WT	X	X										RING WING WITH CENTER BODY AND PROP	
	488	DP	T/A	AX	-	-													
	488	DP	E/A	ST	C	ST	X	X										REVIEW AND BIBLIOGRAPHY ON DUCTED PROPS THROUGH 1968	
	490	FRDP	E/A	ST	C	ST	X	X											
	527	DP	T/A/D	S	-	-	X	X											
	534	DP	A	AX	-	-												APPENDIX PRESENTS PERF DATA ON 20 VTOL'S, 8 JEEPS	
	547	DP/S	T/D/E	S	P	F												JEEP-TYPE VEHICLE	
	556	DP	E/A	T	M	WT	X	X										PROBS OF DUCTED FAN AND ITS APPLICATION. THEOR RESULTS FOR THRUST, MOM, AND MOM OF MOMENTUM	
	584	DP	T	H/L/S	-	-												REVIEW AND ANALYSIS OF EXPER RESULTS, STATIC, AXIAL AND NONAXIAL	
	586	DP	R/A	H/T/C	M	ST/WT													
	598	DP	T	AX	-	-	X	X										FLOW PATTERN AND PRESS. DISTRIB ABOUT THE SHROUD, REARWARD MOTION AND FWD MOTION	
	599	DP	E	H	C	ST												DUCTED-PROP TEST PROGRAM - DATA ANALYSIS	
	631	DP	A															BLADE TIP EFFECTS	
	636	DP	E/A	-	M	WT												ROTATING-CYLINDER FLAP	
	63	HL	E/A	-	M	WT	X	X										WING ALONE IN PROP SLIPSTREAM. "DESTALLING" EFFECTS ANALYZED	
	63	TW	T/E/A	T	M	WT	X	X										ROTATING FLAP AS HIGH-LIFT DEVICE	
	122	RF	T/A	LS	-	-	X	X										APPENDIX I AND II (THEORY AND POWER REQ) (SEE REF 122)	
	123	RF	T/E/A	LS	M	WT	X	X											

* See Table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	RIGHT PROFILE OF AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS
								STABILITY AND CONTROL											
								Rolling Control	Yawing Control	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	
4.3 (CONT)	180	58	BLC	E/A/T/R	LS	C	WT	X	X	X	X	X	X	X	X	X	X	BLOWING OVER NOSE OF TE FLAPS, POWER REQ	
	206	59	JF	E/A	LS	C	WT	X	X	X	X	X	X	X	X	X	X	FULL-SPAN AND HALF-SPAN BLOWING, A/R=8.3	
	226	60	-	T/A/E	-	C	WT/ST	X	X	X	X	X	X	X	X	X	X	WING IN SLIPSTREAM STUDY	
	319	56	BLC	T/E	LS	C	WT	X	X	X	X	X	X	X	X	X	X	BLOWING TYPE BLC	
	337	58	HL	A/E	LS	C	ST	X	X	X	X	X	X	X	X	X	X	VISUAL DATA INCLUDED, "ON THE NATURE OF STALL"	
	511	58	HL	T	LS	-	-	X	X	X	X	X	X	X	X	X	X	LIFT AND INDUCED DRAG WITH LARGE DOWNWASH ANGLES	
	514	59	-	T	-	-	-	X	X	X	X	X	X	X	X	X	X	WING IN SLIPSTREAMS	
	518	56	BLC/HL	R/T/E/A	LS	C	WT	X	X	X	X	X	X	X	X	X	X	BLOWING, SUCTION, SLOTTED, PLAIN FLAP, HIGH-LIFT DEVICES	
	542	58	DSS/BLC	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	WING IN PROP SLIPSTREAM	
	620	81	DISC/DW	E/A	LS	C	WT	X	X	X	X	X	X	X	X	X	X	PROP TO WING CHORD RELATIONSHIP	
	631	59	S	T	LS	-	-	X	X	X	X	X	X	X	X	X	X	THEORY OF WING-PROPULSION SYSTEMS	
	622	60	-	T/A	-	-	-	X	X	X	X	X	X	X	X	X	X	SLIPSTREAM SHEAR ON AIRFOIL CHAR	
	628	57	JF	E/A	LS	C	WT	X	X	X	X	X	X	X	X	X	X	AND GRAB FOR VARIOUS TAIL LOCATIONS, LIFT, DRAG, AND FITCH MOM OF FAMILY OF ANNULAR AIRFOILS, EST LIFT-CURVE SLOPES AND INDUCED DRAG COMPARED WITH TEST	
4.4	198	57	DP	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	RING WING WITH CENTERBODY	
	287*	59	-	E/A	N-AX	C	WT	X	X	X	X	X	X	X	X	X	X		
	468	53	-	T/A	N-AX	-	-	X	X	X	X	X	X	X	X	X	X		
	513	47	-	T	N-AX	-	-	X	X	X	X	X	X	X	X	X	X		
	642	56	DP	A/R/D	LS	-	-	X	X	X	X	X	X	X	X	X	X	SPECIAL PROBS DUE TO ANNULAR WING CONCEPT, FROM POINT OF VIEW OF FLOW MECHANICS	
4.5	3	53	JF	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	EFF OF GRD PROXIMITY ON DELTA WING WITH AND WITHOUT JET BLOWING AT TE	
	4	81	JF	E/A	LS	M	WT/ST	X	X	X	X	X	X	X	X	X	X	THRUST, FLOW VISUALIZATION, DOWNWASH MEAS, JET TRAVERSING, COMPARISON WITH THEORY	
	76	80	JF	T	LS	-	-	X	X	X	X	X	X	X	X	X	X	EMPIRICAL RELATIONS FOR LIFT AND DRAG OF UNSWEPT 3-DIM JET-FLAPPED WINGS	
	82	85	JF	E/A	LS	M	SIM	X	X	X	X	X	X	X	X	X	X	JET-FLAP MODEL WITH MOVING BELT RIG FOR GRD SIMULATION	
	83	57	JF	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	BASIC AERO CHAR, INCLUDING GRD EFF	
	87	67	JF	T/A	LS	-	-	X	X	X	X	X	X	X	X	X	X	PROPOSED JET-WING FOR V/STOL AIRCRAFT, THRUST AUGMENTATION CONCEPTS ASSESSED, TEST APPARATUS AND RESULTS DESCRIBED	

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONFIG	NATURE OF REPORT MATERIAL	RIGHT ANGLE OR AIRBOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS							
								Wing	Free Propeller	Data Propeller	Two Dimensional Data	Pressure Data	Max Lift or Turning	Ground Effect	Repeating Section	Control	Longitudinal		Lateral/Directional	Dynamics	Substructure	Stability*	Oscillatory Effects	Span or Low Aspect Ratio Control/Structure	Handling Qualities
4.5 (CONT)	116	67	JF	D	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	JET AUGMENTOR WING PRINCIPLE DISCUSSED	
	146	66	JF	D	LS	-	-	X	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	COMMENTS ON AERODYNAMICS OF PROPULSIVE WING CONCEPT. LIFT, SPAN EFFICIENCY, E.C., DRAG DIVERGENCE	
	147	66	JF	E/A	LS	M	WT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SEMI-SPAN JET-AUGMENTED-FLAP MODEL, WITH AND WITHOUT GRID BOARD	
	172	62	JF	T	LS	-	-	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	THEOR SOLUTION FOR PITCH MOM OF 2-DIM JET-FLAPPED WING	
	181	61	JF	E/A	LS	M	WT	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	AERO FORCES AND MOM ON JET-FLAPPED WING IN PRESENCE OF PROF SLIPSTREAM AND FREE STREAM	
	182	61	JF	E/A	LS	M	WT	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LARGE-SCALE EXTERNAL FLOW JET-AUGMENTED-FLAP MODEL	
	193	56	JF	E	H	C	ST	X	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FLATTENED TAILPIPE EXHAUSTED OVERFLAP	
	204	57	JF	E/A	LS	M	WT	X	X	X	X	-	-	-	-	-	-	-	-	-	-	-	-	GRD EFF ON HIGH LIFT COEFFS	
	301	68	JF	D/A	LS	M	WT	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	DESIGN STUDY OF AUGMENTOR-WING JET STOL RESEARCH AIRCRAFT. ENGINE SURVEY CONFIG DEVELOPMENT, PER: COMPARISONS, CONFIG SELECTION, SYS. AERODYNAMICS	
	322	67	JF	T	LS	-	-	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	ASYMPTOTIC THEORY OF HIGH-ASPECT RATIO JET FLAP, LIFT, INDUCED DRAG, AND PITCH-MOM COEFFS. COMPARISON WITH EARLIER THEORIES	
	326	68	JF	E/A	LS	M	WT	X	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LOW-SPEED CIRCULATION-CONTROLLED AIRFOIL, LIFT, DRAG, AND PITCH MOM AS FUNCTIONS OF BLOWING MOMENTUM COEFF. TWO-DIM.	
	336	67	JF	E/A	LS	M	WT	X	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MODEL WITH EXTERNAL JET-AUGMENTED FLAP	
	338	64	JF	T/A	LS	-	-	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	THRUST HYPOTHESIS AND ITS VERIFICATION. APPLICATION OF JET-FLAP PRINCIPLE TO STOL AIRCRAFT	
	340	59	JF	A/D	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	JET-FLAP APPLICATION FOR STOL	
	341	63	JF	T	LS	-	-	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHAR OF JET-FLAPPED WINGS AT ANGLES OF ATTACK	
	342	64	JF	T/D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHAR OF JET-FLAPPED WING EVALUATED FOR STOL APPLICATION	
	378	67	-	T	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LINEAR-THEORY SOLUTION FOR JET FLAP IN GRD EFF	
	379	67	JF	T/A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LINEAR THEORY FOR JET FLAP IN GRD EFF. GEN LINEAR CASE OF AN ARBITRARY AIRFOIL AND JET COEFF	
	381	56	JF	E/D	LS	M	WT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PRELIM INVESTIGATION OF JET FLAPS IN 7' X 16' LOW-SPEED TUNNEL	
	380	57	JF	A/D	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LIST OF JET-AUGMENTATION FORMS OF WINGS WITH LIST OF RESEARCHERS AND LIFTING SURF. CHARTS FOR WING, WING, LONGITUDINAL AND C	
	391	66	JF	E/A	LS	M	WT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EFF OF ASPECT RATIO AND END PLATES ON AERO CHAR OF WING WITH JET FLAP. CHART FOR EST JET-CIRCULATION LIFT
	427	65	JF	A	LS	M	WT	X	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	DATA ANALYSIS OF SEMI-SPAN VTOL MODEL. INTEGRATED PROPULSION-LIFTING SURF. FLOW ANGULARITY MEAS AT TAIL
	433	66	JF	T	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FLOW PATTERN OF THIN JET-FLAPPED 2-DIM WING IN GRD EFF
	436	66	JF	T	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	ANALYSIS OF A JET SHEET AS AN ALTERNATIVE TO A RIGID DIFFUSER FOR MOMENTUM PROPULSION

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

A.S. (CONT)	BLANKET CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/TOL CONCEPT	NATURE OF REPORT MATERIAL	RIGHT SOURCE OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS		
									STABILITY AND CONTROL														
									Wing	Free Propeller	Ducted Propeller	Transverse Duct	Pressure Duct	Max. Lift or Thrust	Control Moment	Control Surface	Longitudinal	Lateral Directional	Dynamics	Stability		Dynamic Pitch	Low or Low Speed Control/Directional
473	69	JF	E/A	L/S/C	M	WT	X																STOL AIRCRAFT EQUIPPED WITH EXTERNAL-FLOW JET FLAP
487	62	JF	T/A/R	L/S	-	-	X																SEMIEMPIRICAL METHOD FOR DETERMINING JET-FLAP PERF. COMPARISON WITH TEST DATA
504	61	JF	T	L/S	-	-																	EVALUATION OF DOWNWASH BEHIND JET-FLAPPED WING
568	57	JF	T/A	L/S	-	-	X	X															THEOR SOLUTION FOR 2-DIM JET-FLAPPED WING. COMPARISON WITH EXPERIMENT
580	61	JF	T/A	L/S	-	-	X	X															THEOR SOLUTION FOR 2-DIM JET-FLAPPED WING
588	60	DBL/JF	E	H/L/S	C	WT	X	X	X														WING-PROPELLER CONFIG. JET FLAP PLUS DEFLECTED SLIPSTREAM
573	57	JF	E/A	L/S	M	WT	X																POWERED BLOWING-TYPE CIRCULATION CONTROL
574	65	L+P/JF	A	H/C	M	WT	X																ANALYSIS OF SELECTED DATA. INTEGRATED PROPULSION-LIFTING-SURFACE SYSTEM. COMPARISON WITH THEORY
581	60	JF	E	L/S	M	WT	X																EFF OF WING JET THRUST ON AERO CHAR
590	62	JF	T	L/S	-	-																	LONG STAB. CONTROL AND RESPONSE CHAR OF JET-FLAP AIRCRAFT
597	62	BLC/JF	T/E/A	L/S	M	WT	X	X															INCR OF LIFT BY BLOWING BLC. JET MOMENTUM REQ TO PREVENT SEP. SURVEY ON SYSTEMATIC MEAS
617	61	JF	E	L/S	M	WT/SIM	X																FREE-FLT INVESTIGATION TO EVALUATE GRID EFF ON JET-FLAPPED WING
628	57	JF	E/A	L/S	C	WT	X	X															FLOW-FIELD CHAR AND GRID INFLUENCE ON MODEL WITH JET AUGMENTED FLAPS. DOWNWASH AND DOWNWASH GRADIENTS
648	67	JF	D	L/S	-	-																	PROGRESS REPT THROUGH LATE 1967 ON AUGMENTOR-WING RESEARCH
660	61	JF	T	L/S	-	-																	AERODYNAMICS OF JET FLAPS
663	66	S	R/D	H/T/C	-	-																	BASIC RESEARCH ON V/TOL AERODYNAMICS AT RAE. 1962-66. JET LIFT, FAN LIFT, BLC. JET FLAPS, GRID SIM, WT TEST TECHNIQUES
684	62	JF	T/A	L/S	-	-																	A FORMULA DERIVED BY CONFORMAL TRANSFORMATION FOR LIFT INDUCED BY 90-DEGREE JET FLAP IN GRID EFF. COMPARISON WITH OTHER THEORY AND EXPERIMENT
672	64	JF	A	L/S	-	-																	THEOR TREATMENT OF 2-DIM INCOMPRESSIBLE JET. EFF OF JET ENTRAINMENT ON LOSS OF THRUST FORCE
677	60	JF	T	L/S	-	-																	THEOR METHOD FOR THRUST DEVELOPED BY JET FLAP
5.1	22	64	FW	T/A	H/T/C	M	WT																EST OF XV-6A AERO CHAR.
47	66	S	R/D/P/R/A	S	-	-																	AIRWORTHINESS STANDARDS FROM RECOMMENDATIONS OF AEROSPACE INDUSTRIES ASSN. FAA DRAFT DISCUSSED
128	60	TH/D68	T/A	H/T/C	-	-																	METHODS PREDICTING AERO STAB DERIVS OF PROP. DRIVEN TILT-WING V/TOL AIRCRAFT
700	69	S	R/A/D	S	-	-																	PROGS. IN SET STAB AND CONT CHAR OF V/TOL AIRCRAFT. REG ANALYTICAL STUDIES. MATH MODELS DISCUSSED
208	62	-	E/A	H/T	P	F																	EFF OF LOW-SPEED CONTROL CROSS COUPLING. HELICOPTER TEST BED

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONFIG	NATURE OF REPORT MATERIAL	RIGHT REQUIRE OF AIRCRAFT	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS														COMMENTS						
								STABILITY AND CONTROL							OTHER AREAS													
STABILITY AND CONTROL	Handling Qualities	Handling Characteristics	Control	Longitudinal	Lateral/Directional	Dynamic	Stabilization	Stability	Steadiness	Cross-coupled Effects	Effects of Airframe	Effects of Propulsion	Effects of Landing Gear	Ground Effect	Effects of Terrain	Max. Lift or Thrust	Pressure Drag	Free-Body Drag	Free Propeller	Wind	Force and Moment							
5.2 (CONT'D)	124	86	S	R/A	H/T	-	-																				DYN AND CONT REQUIREMENTS FOR VTOL BASED ON HANDLING-QUALITY EXPERIMENTS LONG HOVER AND TRANSITION	
	125	86	-	R/A	H	-	-																					LAT HOVER/MODE DYNAMICS SATISFACTORY AND UNACCEPTABLE
	128	80	TW/DSS	T/A	H/T/C	-	-																					METHODS PREDICTING AERO STAB DERIVS OF PROP-DRIVEN TILT-WING V/STOL AIRCRAFT EXPR VALUES OF LONG STAB DERIVS OF 3 TILT-WING AIRCRAFT VARIED TO ANALYZE CHARACTERISTIC ROOTS AND TRANSIENT RESPONSE
	130	86	TW	A	H/T	M	WT																				DYN RESPONSE OF VTOL AIRCRAFT WITH VARYING FLT VELOCITY	
	133	85	-	T	LS	-	-																					ASPECTS OF LONG DYN STAB CHAR OF PROP-DRIVEN V/STOL AIRCRAFT ANALYZED
	135	85	DP/TW	A	LS	-	-																					XC-102A MODEL LONG DYNAMICS AT HIGH WING INCIDENCE
	136	67	TW/DSS	E/A	T	M	T																					DESCRIPTION OF PRINCETON DYNAMIC MODEL TRACK IVTOL MODEL TESTING!
	137	86	-	D	LS	-	-																					PRINCETON FORWARD FLIGHT FACILITY, VZ2 AND HELICOPTER
	138	61	TW/H	E/A	T	M/E	T/F																					ANALYSIS OF LONG EGS OF MOTION
	140	81	S	T/A	HLS	-	-																					DISCUSSION OF COORDINATED METHODS USED TO PERFECT DYN BEHAVIOR OF BREGUET #40 LINEAR TIME VARYING APPROXIMATION TO DYNAMICS OF LOW SPEED FLYING MACHINES APPLICATION TO LONG DYNAMICS OF VTOL AIRCRAFT DURING TRANSITION
	162	81	DSS	D	H/T/C	-	-																					RESPONSE DESIRED OF V/STOL AIRCRAFT PROBS IN EST STAB AND CONT CHAR OF V/STOL AIRCRAFT. REQ ANALYTICAL STUDIES MATH MODELS DISCUSSED
	167	83	-	A	T	-	-																					SHORT SC-1 THEORY OF DYN STAB OF VTOL AIRCRAFT CHAR OF DISTURBED MOTION IN HOVER. CONTROLLED TRANSITIONAL FLT DISCUSSED
	170	82	-	T/A	H/T	-	-																					SIMPLIFIED ANALYTICAL APPROACH FOR EVALUATING DYN STAB CHAR OF VTOL CONFIG EGS OF MOTION FOR UNCONVENTIONAL FLT CHAR
	200	89	S	R/A/D	S	-	-																					EGS OF MOTION FOR UNCONVENTIONAL FLT CHAR
	202	80	L-P	A/T	H/T	P	F																					XV4B: EFF ON STAB AND CONT OF VARYING AERO DERIVS. 4 FLT COND
	256	85	-	T	H	-	-																					DEVEL OF EGS OF MOTION FOR ANALYZING VTOL DYNAMICS DURING HOVER AND TRANSITION
	289	88	DP	A	T	-	-																					X-224 DYNAMICS IN TRANSITION. EGS OF MOTION FOR IDENTIFYING FLT TEST PARAMETERS
	292	81	TW	T/A	T	-	-																					ANALOG SIM OF XV5A DYN STAB CHAR
	301	80	-	T/A/D	H/T	-	-																					DYN STAB TESTS. EFF OF STAB DERIVS ON DYN STAB
	318	86	DJ	A	S	SIM	SIM																					
	323	86	-	T	H/T	-	-																					
	324	88	DP	A	T	-	-																					
	344	85	FIN	A	T	-	-																					
	389	88	TW		LS	M	WT																					

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V-STOL CONCEPT	NUMBER OF REPORT MATERIAL	FLIGHT RECORD OR AIRCRAFT	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS
								Wing	Fuselage	Empennage	Propulsion	Control	Structural	Stability	Dynamic	Control	Performance	
5.2 (CONT'D)	308	TW	E/A	HIT	M	F												4-PROP VTOL
	309	TW	E/A	T	M	F												4-CASCADE WINGS, 4 PROPS. ANALYSES FOR SIM AND DEVEL OF EOS OF MOTION FOR X-19, XV-5A, AND P-1127
	412	-	A	-	-	-												DYN TESTS OF FREE-FLT MODELS OF 3 VSTOL CONCEPTS, DYN STAB AND CONT PROBS.
	416	DSS	E/A	H	M	F												4-PROP TILT WING WITH FLAPS
	417	TW/DJ/FH	R/D	HLS	-	-												4-DUCT VEHICLE
	451	TW	E/A	HIT	M	F												2-DUCT VEHICLE
	489	DP	E/A	HIT	M	F												DISCUSSION AND RESULTS OF 3 MODEL TEST TECHNIQUES USED BY NASA FOR DYN STAB TESTS
	470	DP	E/A	HIT	M	F												EFF OF TYP NONLINEARITIES IN LIFT AND PITCH-MOM CURVES ON LONG MOTION, APPLIC TO VSTOL AIRCRAFT
	471	-	A/R	LS	-	-												MODEL SIMILAR TO X-22A, LONG AND LAT TRANSIENT RESPONSE USING DYN MODEL, COMPARISON OF LIFT, DRAG, AND PITCH-MOM OF ISOLATED DUCT
	481	-	A/R/D	LS	-	-												MODEL SIMILAR TO X-22A, LONG TRANSIENT RESPONSE USING DYN MODEL, TIME HISTORIES OF MODEL MOTION IN VARIOUS LONG DEGREES OF FREEDOM
	485	DP	E/A	M	M	WT	X											YS-119A MODEL TESTED IN 3 DEGREES OF LAT-OIR, FREEDOM IN MID-TRANSITION FLT COND, CONTROL EFFECTIVENESS, CONTROL MIXING REQUIREMENTS
	496	DP	E/A	T	M	WT												PRINCETON FORWARD FLIGHT FACILITY (VZ2 MODEL)
	498	TW	E/A	T	M	T/F	X											ASYMPTOTIC APPROX USING MULTIPLE TIME SCALES FOR LONG, DYN OF VTOL VEHICLES
	524	-	A	T	-	-												RESEARCH AIRPLANE DESIGN STUDY, STAB AND CONT SUMMARIES, FLT DYN ANALYSIS
	522	-	A	HIT/C	-	-												DYN LAT STAB AND CONT CHAR OF THE VZ-2, SIM FLT TEST EVALUATION, TRANSITION RANGE WHERE WING STALLING OCCURS
	531	TW/DSS	E/A	T	M	SIM												X-13
	543	TS	E/A	LS	PM	WT												DYN STAB AND CONT CHAR OF A VECTORED-THRUST VSTOL MODEL, FLT SIMULATION
	553	DJ	E/A	HIT/C	M	SIM												PROB AREAS IN SIM OF LAT-OIR DYN BEHAVIOR OF STOL AIRCRAFT, ED OF MOTION, TURBULENCE EFFECTS
	578	TW/DSS	E/A	T	SIM	SIM												DEVEL OF DYN MODEL FOR ANALYZING VSTOL TRANSPORTS IN LOW-ALT TURBULENCE IN TRANSITION, FACTORS AFFECTING RESPONSE TO TURBULENCE
	593	-	T/A	T	-	-												VZ-2
	600	TW	E/A	T	PM	WT	X											X-18
	601	TW	E/A	S	PM	F												VZ-2
	602	TW	E/A	S	PM	F												

* See table 9B for key to symbols

TABLE 9-A. (CONT'D)*

B-2 ICONTI	RESEARCH CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VISTOL CONFIG	NAME OF REPORT MATERIAL	FRONT VIEW OF AIRFLOW	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS			
								STABILITY AND CONTROL														
								Roll	Pitch	Yaw	Roll/Pitch	Pitch/Yaw	Roll/Yaw	Roll/Pitch/Yaw	Control	Longitudinal	Lateral/Directional	Dynamics		Stability	Structural	Oscillatory Effects
604	D85	E/A	H	M	F	X																4 ENGINE TRANSPORT CONFIG, EXTENSIBLE VAMES
607	D85	E/A	T	M	F	X																4 ENGINE TRANSPORT CONFIG, EXTENSIBLE VAMES
608	D85	T/A	T	-	-																	6 EDS OF MOTION DEVELOPED AND EXAMINED
602	TH	T/A/E	S	P/M	F/M/T																	STAB DERIVS (VZ-2)
603	DP	A/T/E	T/C	P/C	F/M/T																	LAT STAB DERIVS (VZ-4)
604	DP	A/T/E	T/C	P/C	F/M/T																	LONG STAB DERIVS (VZ-4)
605	-	T/A	H	-	-																	TECHNIQUE FOR ASSESSING EFF OF CONFIG GEOM, SIZE, AND MASS ON DYNAMICS OF HOVERING VEHICLES. EQ OF MOTION, THEORY COMPARED WITH TEST DATA ON DUCTED PROPS AND FREE PROPS
61	-	A	H/T	-	-																	
7	-	E/A	H/T	S	S																	HELICOPTER, AIRPLANE, VISTOL COMPARISON
8	S	E/A	H/T	S/SIM	S/SIM																	SEVERAL AIRCRAFT, UNPUBLISHED
39	-	D	H/T	-	-																	AGARD RECOMMENDATIONS AS OF 1962
47	S	R/D/P/A	S	-	-																	AIRWORTHINESS STANDARDS FROM RECOMMENDATIONS OF AEROSPACE INDUSTRIES ASSN, FAA DRAFT DISCUSSED
79	-	D	H/T	-	-																	AGARD RECOMMENDATIONS
86	TH	E/D/P/R	H/T	SIM	SIM																	STUDY OF TILT-WING HANDLING QUALITIES. 2 ND OF FREEDOM
107	DP	E/A	H/T/L/S	-	-																	CONT AND STAB AUGMENTATION REQUIREMENTS, THEOR AND ANALOG-COMPUTER INVESTIGATIONS
108	-	E/A	L/S	SIM	SIM																	STUDY TO DETERMINE METHOD OF PRESENTING HANDLING QUALITIES CRITERIA FOR UNSTABLE MODELS
124	S	P/A	H/T	-	-																	DYN AND CONT REQUIREMENTS FOR VTOL, BASED ON HANDLING-QUALITY EXPERIMENTS.
132	-	D/R	H/T/C	-	-																	SUGGESTIONS FOR FLYING-QUALITY SPECIFICATIONS FOR VTOL AIRCRAFT
148	-	P/A	H/L/S	SIM	F/SIM																	EFF OF WEATHERCOCK STAB ON DR HANDLING QUALITIES, SYNTHETIC TURBULENCE.
179	-	E/A	H	SIM	SIM																	VAR STAB HELICOPTER TESTED
200	S	P/A/D	S	-	-																	PILOTTED I D.O.F., FLT SIMULATOR, ALTITUDE
207	-	E/A	T	SIM	SIM																	PROBS IN EST STAB AND CONT CHAR OF VISTOL AIRCRAFT, REG ANALYTICAL STUDIES
213	-	E/A	H	SIM	SIM																	DESCRIPTION OF ANALOG-COMPUTER APPROACH TO VISTOL SIMULATION
218	-	E/A/P/R	H	SIM	SIM																	HEIGHT CONTROL, I D.O.F. SIMULATOR
																						HEIGHT CONTROL REQ FOR VTOL AIRCRAFT DURING HOVER

* See table 98 for key to summary

TABLE 9-A (CONT'D)*

AIRCRAFT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONFIG	NAME OF REPORT OR ARTICLES	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS
						RIGHT ROOM OR AIRCRAFT			STABILITY AND CONTROL								
						Yaw	Roll	Pitch	Longitudinal	Dynamic	Stability	Oscillations	Rate of Turn	Control	Handling	Other	
217	62	-	-	E/A	H						X		X	X	X	X	HEIGHT CONTROL, FIXED-BASE SIMULATOR AND AIRCRAFT FLIGHT CHECKS
243	66	-	-	A	H/T/C								X	X	X	X	PROGRESS IN DEVELOPMENT OF HANDLING QUALITY SPEC FOR MILITARY V/STOL AIRPLANES
246	63	-	-	D	H/T										X		FAA PROPOSED V/STOL FLIGHT REQUIREMENTS
262	66	-	-	A	H												FACTORS AFFECTING EFFICIENCY OF HOVER CONTROL SYSTEM FOR V/STOL CONTROL EFFECTIVENESS CONTROL CRITERIA
290	66	S	S	R/A	C/T/H								X	X	X	X	NO. AMERICAN ROCKWELL RESEARCH IN V/STOL FLT CONT. V/STOL FLT CONTROL DESIGN WITH IFR CAPABILITY, V/STOL DCG PROB FROM CONVENTIONAL FLT TO HOVER
310	66	J/A-P	-	R/A	H/A/S								X	X	X	X	EFF OF VEHICLE SIZE ON HANDLING QUALITIES OF V/STOL AIRCRAFT AT HOVER AND LOW SPEEDS
318	66	-	-	A	LS								X	X	X	X	LONG HANDLING QUALITIES DATA ANALYZED IN TERMS OF PILOT RATING TRENDS ASSOC WITH VARIATIONS IN IMPORTANT PARAMETERS
351	67	-	-	R/D	S										X	X	DEVEL OF V/STOL FLYING-QUALITIES CRITERIA. AREAS FOR FURTHER RESEARCH
363	63	-	-	R/D	LS											X	V/STOL HANDLING QUALITIES USING FIXED-BASE SIMULATORS. SIM TECHNIQUES, BOUNDARIES OF DAMPING AND CONT SENSITIVITY
383	60	-	-	E/A	H/T											X	FLY SIM TO DETERMINE LONG HANDLING QUALITIES AND PILOT TECHNIQUES. NORMAL AND EMERGENCY CONDITIONS
403	62	TW	-	E/A	H/T/LS											X	DIRECTIONAL EFF ON DIR HANDLING QUALITIES. AIRBORNE SIMULATOR (VAR STAB HELICOPTER) ANGULAR RATE DAMPING CONTROL SENSITIVITY
407	64	-	-	E/P/R/A	H/A/S								X	X	X	X	FLY RESEARCH TO DETERMINE CONT POWER AND CONT SENSITIVITY REQUIREMENTS DURING VISUAL HOVERING AND LOW SPEED APPROACH. (VARIABLE STAB HELICOPTERS)
409	66	-	-	E/P/R/A	H/A/S								X	X	X	X	V/STOL ANALYSES FOR SIM AND DEVEL OF EGS OF MOTION. EGS OF MOTION FOR X, Y, Z, R, AND P. (112)
412	63	-	-	A	-												PARAMETERS IDENTIFIED TO SPECIFY HANDLING-QUALITIES CRITERIA. DERIVED FROM
500	66	-	-	E/A	H/T											X	HOVERING CONT REQUIREMENTS OF VARIABLE STAB AND CONT X, Y, Z
522	67	DJ	-	E/A	H											X	LONG CONT PROBS AT LOW DAMPING
528	61	-	-	E/A	H/T											X	DAMPING AND CONT POWER EFF ON HELICOPTER HANDLING QUALITIES
528	66	H	-	E/A	H/A/S											X	RESEARCH AND PROGRESS TO 1969 IN DEVEL OF V/STOL FLYING-QUALITIES SPEC. PERTINENT AREAS DISCUSSED
530	66	-	-	R/D/A	H/T/C											X	RESULTS OF FLT TESTS IN HOVERING RIG TO INVESTIGATE HANDLING QUALITIES
540	66	-	-	E/P/R/A	H											X	DIR HANDLING-QUALITIES CRITERIA FOR INSTRUMENT APPROACH
557	66	-	-	E/A	T											X	DYN RESPONSE CRITERIA FOR V/STOL AIRCRAFT SIMULATOR
563	67	-	-	R	H/T/C												
587	60	-	-	A	H/T												
588	60	-	-	A	H/T												

* See table 9A for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NAME OF REPORT OR MATERIAL	PILOT BEHAVIOR OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS													COMMENTS					
								Fuselage	Wing	Propeller	Engine	Control	Longitudinal	Lateral/Directional	Dynamics	Stability	Structures	Operational Effects	Area of Low Speed	Control/Transfer		Handling Qualities	Handling Characteristics			
63 (CONT)	69	-	P/A	H/L	SIM	SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CRITERIA FOR VTOL DYN RESPONSE IN HOVER AND LOW-SPEED FLT LONG, LAT, HEIGHT, AND DIR HANDLING QUALITIES REQUIREMENTS		
64	64	-	R/D	H/T	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	QUALITATIVE DISCUSSION OF STAB AND CONT PROBS OF VTOL AIRCRAFT		
64	7	-	E/A	H/T	S	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	HELICOPTER AIRPLANE V/STOL COMPARISON /		
63	8	5	E/A	H/T	S/SIM	S/SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SEVERAL AIRCRAFT, UNPUBLISHED		
65	9	DSS/DSS-BLC	R/A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LIFT PERFORM LIMITATIONS IN LOW-SPEED OPERATION, AND HANDLING QUALITIES PROBS OF STOL AIRCRAFT	
64	40	-	R/D	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FLYING QUALITIES FOR MIL V/STOL VEHICLES RECOMMENDED BY AGARD FLT MECH PANEL	
64	47	5	R/D/P/A	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	AIRWORTHINESS STANDARDS FROM RECOMMENDATIONS OF AEROSPACE INDUSTRIES ASSN, FAA DRAFT DISCUSSED	
64	58	1P	E/A	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FLYING QUALITIES REPT FOR KAMAN K 168	
64	84	DSS	A	LS	SIM	SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	OTHER AIRCRAFT, SHORT-FIELD LDG CHAR OF STOL AIRCRAFT FROM PERF STUDIES, MANUEVER DYN ANALYSES AND FLT SIM	
64	86	-	P/A/E/A	H/T	SIM	SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EFF OF SOME DERIVS, TURBULENCE, AND CONT POWER ON VTOL HANDLING QUALITIES	
64	88	TW	E/D/P/R	H/T	SIM	SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TILT-WING HANDLING QUALITIES, 2° OF FREEDOM	
64	89	-	E/P/R	M	M	F	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CRITICAL DEMANDS ON VTOL ATTITUDE IN HOVER, APPLICATION OF MANUEVERING CRITERIA IN VAR STAB AIRCRAFT	
64	101	TW	A	T	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FACTORS INFLUENCING DYN LONG STAB OF TILT-WING V/STOL AIRCRAFT	
64	104	L+P	A/P/R	H/T/C	PH	F	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SHORT SC-1 PERF, STAB, AND CONT, ESPECIALLY IN HOVER AND TRANSITION	
64	117	FW	R/D/A	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	XV-5A SIMULATION PROGRAM, DESIGN PROBS SOLVED BY SIMULATION	
64	124	L	R/A	H/T	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	DYN AND CONT REQUIREMENTS FOR VTOL, BASED ON HANDLING-QUALITY EXPERIMENTS, LONG HOVER AND TRANSITION	
64	141	DSS	A	C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BREGUET 941, LOW-SPEED FLYING QUALITIES COMPARED WITH AGARD REQUIREMENTS FOR V/STOL
64	148	-	P/A	H/L/S	SIM	FSIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EFF OF WEATHERCOCK STAB ON DIR HANDLING QUALITIES, SYNTHETIC TURBULENCE, VAR STAB HELICOPTER TESTED
64	151	DSS	D	LS/C	P	F	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BREGUET 941 AND 942
64	161	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LAT DIR HANDLING QUAL OF V/STOL AIRPLANES
64	166	5	P/E	T	P	F	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SEVERAL PHOTOTYPES
64	180	DJ	L/A/P/R	H	P	FSIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X-14A UTILITY OF DIRECT SIDE-FORCE MANUEVERING DEVICE FOR VTOL AIRCRAFT
64	200	5	R/A/D	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PROBS IN EST STAB AND CONT CHAR OF VTOL AIRCRAFT, RECALCULATED STUDIES, MATH MODELS DISCUSSED
64	202	L+P	A/T/E	H/T	P	F	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SHORT SC-1

* See table 9C for key to summary

TABLE 9-A. (CONT'D)*

CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VTOL CONCEPT	MATERIAL OF PROTOTYPAL	MIGHT REQUIRE OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS
								Wing	Fuselage	Engine	Propeller	Control Surfaces	Longitudinal	Lateral/Directional	Dynamic	Stability	Structural	Control/Systems	Other	
B-4 (CONT)	203	86	A/D/PR	H	SIM	SIM	SIM													6° OF FREEDOM MOTION SIMULATOR EVALUATED ON ITS ABILITY TO SIMULATE VTOL VISUAL HOVER AC
	208	82	E/A	H/T	E	F														LOW-SPEED CONTROL CROSS COUPLING HELICOPTER SIMULATOR
	209	84	P/R/A	L/S/R	E	F														EFF OF CHANGES IN STATIC DIR STAB ON HANDLING QUALITIES AND ON DIR SENSITIVITY AND DAMPING
	210	81	E/A	H/T	SIM	SIM														GYROSCOPIC CROSS COUPLING, PITCH-ROLL
	211	81	E/A	H/T	SIM	SIM														GYROSCOPIC CROSS COUPLING, PITCH-YAW
	213	82	E/A	H	SIM	SIM														HEIGHT CONTROL, I D O F SIMULATOR
	217	82	E/A	H	SIM/E	SIM/F														HEIGHT CONTROL, FIXED-BASE SIMULATOR AND AIRCRAFT FLIGHT CHECKS
	221	88	D	H/T	-	-														HANDLING QUALITIES, PILOTING TECHNIQUES, AND HUMAN FACTORS OF VTOL
	223	86	T/E/PR	LS	SIM	SIM														VTOL CONT AND RESPONSE REQUIREMENTS USING VAR STAB HELICOPTER AS SIMULATOR, C _g VARIED, CONTROL SENSITIVITY AND CONT POWER REQUIREMENTS, SIMULATED TURBULENCE
	241	86	E/A	H	SIM	SIM														6° OF FREEDOM MOTION SIMULATOR USED TO INVESTIGATE CONT-SYS REQUIREMENTS, EMPHASIS ON HOVERING, SIMULATOR CHART
	242	86	E/A	H/T	SIM	SIM														6° OF FREEDOM MOTION SIMULATOR, LOW-SPEED CONT SYS CONCEPTS RELATING TO HANDLING QUALITIES AND CONT POWER REQUIREMENTS
	243	86	A	H/T/C	-	-														PROGRESS IN DEVEL OF HANDLING-QUALITY SPEC FOR MIL VTOL AIRPLANES
	285	80	D/A	-	SIM	SIM														REVIEW STUDY ON SIMULATORS
	288	82	E/A	T	SIM	SIM														3 CONFIGS, DP, TR, AND TW WITH FLAPS
	289	84	T/A	LS	-	-														EVALUATION OF LAT CONT EOS FOR APPLICATION TO STOL AIRCRAFT
	282	86	A	H	-	-														FACTORS AFFECTING EFFICIENCY OF HOVER CONTROL SYS FOR VTOL, CONTROL EFFECTIVENESS, CONTROL CRITERIA
	290	80	R/A	H/T/C	SIM	SIM														NO. AMERICAN ROCKWELL RESEARCH IN V/STOL FLT COND, VTOL FLT CONT DESIGN WITH IFR CAPABILITY, VTOL LOG PROB FROM CONVENTIONAL FLT TO HOVER
	291	85	DSS/BLC	E/P/R/A	LS	P/R/SIM														HANDLING QUALITIES OF A STOL SEAPLANE
	298	83	L+P	E/A/D	H/L/S	P	F													RESEARCH FLT-TEST RESULTS ON SC-1 FLYING QUALITIES
	299	88	L+P	R	H/L/S	-	-													SERIES OF TESTS ON SC-1 VARIABLE-STAB VTOL
	300	81	HL	D/R/A	LS	E	F													FLIGHT EXAMINATION OF STOL APPROACH
	304	86	DSS	E/A	S	P/SIM	WT/SIM	X												VZ-3 PROTOTYPE WT AND SIMULATOR STUDY
	309	86	DJL+P	R/A	H/L/S	-	-													EFF OF SIZE ON VTOL AIRCRAFT HOVER AND LOW-SPEED HANDLING QUALITIES
	316	83	DP	E/A/PR	T/L/S	P	F													RESULTS OF COMBINATIONS OF AIRCRAFT ATTITUDE, AIRSPEED, AND ANGLE OF ATTACK IN SIMULATED GRD-CONTROLLED LDC APPROACHES

* See table 9B for key to summary

TABLE 9.A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	TAB OF PUBLICATION	V/STOL CONCERN	NATURE OF REPORT MATERIAL	FLIGHT REGIME OR MENTION	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS													COMMENTS		
								Wing	Fuselage	Engine/Propeller	Two-Dimensional Data	Passive Data	Max Lift or Thrust	Ground Effect	Forward Section	Control	Lateral/Directional	Dynamic	Stability	Maneuvers		Onset/Effects	Loss of Control
318 (CONT)	65	-	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	LOW HANDLING QUALITIES DATA ANALYZED IN TERMS OF PILOT RATING TRENDS ASSOCIATED WITH VARIATIONS IN IMPORTANT PARAMETERS
326	66	DJ	-	T	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	SIM OF PRINCIPLES OF CONTROLLING SMALL JET VTOL AIRCRAFT
335	61	DP	T	H/S	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	HOVERING IN STILL AIR AND GUST COND. GLIDE APPROACHES AT LOW SPEED. DAMPING AND SENSITIVITY
351	67	-	R/D	S	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	DEVEL OF VTOL FLYING-QUALITIES CRITERIA. AREAS FOR FURTHER RESEARCH
360	68	TW	-	LS	M	WT	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	DYN STAB TESTS. EFF OF STAB DERIVS ON DYN STAB.
371	67	FM	E/P/R/A	H/T/C	PH	F	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FLT EVALUATION OF HANDLING QUALITIES OF XV-5A
375	63	S	D	M/T	P	F	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FRENCH VSTOLS (BREGUET 941, BALZAC)
383	63	-	R/D	LS	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	VTOL HANDLING QUALITIES USING FIXED-BASE SIMULATORS. SIM TECHNIQUES. BOUNDARIES OF DAMPING AND CONT SENSITIVITY
384	68	L/P	E/A	T/L/S	E	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	HANDLING QUALITIES OF VTOL AIRCRAFT. CONT MODES COMPARED IN TERMS OF PILOT ACCEPTANCE AND CONT POWER REQ
385	66	TW	R	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	SUMMARY OF TEST PROGRAM ON CL-84 V/STOL PROTOTYPE AND 2 TYPES OF SIMULATORS TO ASSESS QUALITATIVELY HANDLING QUALITIES
402	63	TW	R/A	H/T	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	LONG FLT CONT. FLOW SEPARATION. FITCH MOB. CONT. SYS
403	63	TW	E/A	H/T/L/S	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FLT SIM TO DETERMINE LONG HANDLING QUALITIES AND PILOTING TECHNIQUES. NORMAL AND EMERGENCY CONDITION
407	64	-	E/P/R/A	H/L/S	SIM	SIM/F	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	DIHEDRAL EFF ON DIR HANDLING QUALITIES. AIRBORNE SIMULATOR (VAR-STAB HELICOPTER). ANGULAR RATE DAMPING CONTROL SENSITIVITY
408	68	DJ	E/A	LS	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FLT INVESTIGATION OF STAB AUGMENTATION SYS FOR P-1127 JET-LIFT V/STOL AIRCRAFT. WITH VAR-STAB HELICOPTER
408	66	-	E/P/R/A	H/L/S	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FLT RESEARCH TO DETERMINE CONT POWER AND CONT SENSITIVITY REQUIREMENTS DURING VISUAL HOVER AND LOW-SPEED APPROACH (VAR STAB HELICOPTERS)
410	63	-	A/D/E/P/R	H/T/N-A/X	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	HOVER, TRANSITION, AND STEEP APPROACHES. CONT. CROSS-COUPLING EFF
411	65	TW	E/A/P/R	H/T/C	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	CANADAIR CL-84 SIMULATED BY AIRBORNE SIMULATOR
414	64	DJ/L-P	R/D	LS	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	AERODYNAMICS AND FLYING QUALITIES. JET INTERFERENCE. EFF OF MULTIPLE JETS AND WING PLATFORM. INLET EFF. INGESTION CONT POWER
417	64	TW/ FIW/DJ	R/D	H/L/S	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	DYN TESTS OF FREE-FLT MODELS OF 3 V/STOL CONCEPTS. DYN STAB AND CONT PROBS
421	68	DJ	E/A/P/R	H/T/C	E	F	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	FLT EVALUATION OF P-1127 (XV-5A)
428	68	DP	R/P/R/A	H/T	SIM	SIM	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	3 TYPES OF GRID-BASED SIMULATORS OF THE XV-5A EVALUATED AND COMPARED WITH ACTUAL FLIGHT
431	68	-	R/A	H/L/S	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	VZ-2 WING STALLING PHENOMENA STUDIED. LIFT AND DRAG CORRELATED WITH FLT TEST RESULTS. FLYING QUALITIES PROBS CORRELATED WITH WING STALL. TUF STUDY
432	63	TW/DJ/68	E/A	T	M	WT	X	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	PILOTING TASKS DEFINED. HANDLING QUALITIES OF VTOL AND CONVENTIONAL AIRCRAFT CONTRASTED
440	63	-	R/A	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	REPORT SOURCE OR ABBREVIATION	TEST ARTICLE	TYPE OF TEST	Force and Moment	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS
									Free Flight	Fixed Propeller	Free Propeller	Free-Propeller Mode	Max. Lift or Thrust	Ground Effect	Propeller Reaction	Control	Longitudinal	Lateral/Directional	Dynamics	Stability	
482	57		T/A	T						X											INSTRUMENT FLT SIMULATOR STUDY. HOVER CONTROL POWERS
474	82		E/A	H	SIM																SUMMARY OF FLT TEST RESULTS (VZ2)
482	82		T/W	S	P	F	X														FLT SIMULATOR STUDY OF ATTITUDE CONT REQUIREMENTS FOR SET VTOL AIRCRAFT
483	85		E/P/A	H/DLS	SIM					X											BREGUET BI. RESULTS OF FLT TEST OF PERE. HANDLING QUALITIES AND OPERATIONAL CHAR.
500	84		DSS	E/A	LS	P	F			X											DIR AUGMENTATION FOR SATISFACTORY HANDLING QUALITIES OF STOL AT LOW APPROACH SPEEDS.
501	87		E/P/A	LS	SIM/PM					X											MODIFIED C-130 STOL PERFORM. B/LC FLAP, AILERONS, ELEVATOR, RUDDER
502	83		E/A/PR	LS	P	F				X	X	X									LAT-DIR HANDLING QUALITIES OF THE C-130
503	83		E/A/PR	LS	SIM					X	X	X									PARAMETERS IDENTIFIED TO SPECIFY HANDLING QUALITIES CRITERIA. DERIVS. OBTAINED
506	88		E/A	H/T	SIM					X	X	X									SEVERAL VTOL AIRCRAFT
508	81		PR	S	P	F															HOVERING CONTROL REQUIREMENT OF VAR STAB AND CONTROL X-14
572	82		D/J	E/A	M	P	F				X										LONG CONT PROB AT LOW DAMPING
578	87		E/A	H/T	SIM/F					X	X	X									DAMPING AND CONT POWER EFF ON HELICOPTER HANDLING QUALITIES
579	86		E/A	H/S	E	F				X	X	X									RESEARCH AND PROGRESS TO 1988 IN DEVELOPE. V/STOL FLYING QUALITIES SPEC. PERTINENT AREAS DISCUSSED
580	88		R/D/A	H/T/C																	BELL X-13 VERTOL VZ-20H, DOAK VZ-40A, MCCONNELL XV-1. HANDLING QUALITIES DEFICIENCIES AND RECOMMENDED CORRECTIONS
585	81		D/A	S	S	F															VTOL FLYING QUALITIES AND VAR STAB AIRCRAFT IN FLYING QUALITIES RESEARCH
588	88		E/A/C	H/T/C																	AUTO PILOT IN HOVERING CONT. CONT SYS NONLINEARITIES. SIMULATOR TEST. METHOD FOR ANALYZING STAB AND CONT CHAR OF AUTOPILOT
579	85		C	H	SIM	SIM				X	X	X	X	X	X	X	X	X	X	X	FLT TESTS IN HOVERING RIG TO INVESTIGATE HANDLING QUALITIES
540	86		E/P/R/A	C	SIM	F				X											VAR STAB HELICOPTER USED TO DETERMINE EFF OF PARAMETERS ON LONG HAULING QUALITIES
541	87		E/P/R/A	C	SIM	F				X											SIMULATORS AND THEIR CAPABILITY FOR V/STOL VISUAL FLT SIM
548	87		R/D	H/T	SIM	SIM															STATISTICAL MODELS FOR GUST ENVIRONMENT TO DETERMINE GUST RESPONSE CHAR
545	88		A	H/T																	V/STOL FLYING QUALITIES CHAR. STATE OF THE ART TO 1980
588	88		R/A	S						X	X	X									USE OF PILOT TRANSFER-FUNCTION MODEL AND OTHER ANALYTICAL TECHNIQUES
575	88		D/T/W-DSS	A	H/T																

* See Table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/S/OL CONCEPT	NATURE OF REPORT OR MATERIAL	FLIGHT PROFILE OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS															COMMENTS			
								STABILITY AND CONTROL								OTHER AREAS										
								Heading Qualities	Control	Control	Control	Control	Control	Control	Control	Control	Control	Control	Control	Control	Control	Control		Control		
894				A	H	-	X									X								EFF OF GUST VEL DISTRIBUTIONS ON LAT DIR RESPONSE OF HOVERING VTOL AIRCRAFT		
895				A	H											X								RIGID VS FLAPPING PROP BLADES ON VZ-2 MODEL		
896				E/A	H/T	PM	F										X							LONG TRIM CHAR (VZ-3)		
897				E/A	T	P	F																		CRITERIA FOR VTOL DYN RESPONSE IN HOVER AND LOW-SPEED FLT LONG, LAT, HEIGHT, AND DIR HANDLING QUALITIES REQUIREMENTS	
898				P/R	H/L	SIM	SIM																		QUALITATIVE DISCUSSION OF STAB AND CONT PRGBS OF VTOL AIRCRAFT	
899				D	H/T	-	-																		PROB AREAS IN DESIGN OF VTOL RELATED TO HANDLING QUALITIES AND NEEDED RESEARCH	
900				D	H/T/C	-	-																		VTOL APPROX TRANSFER FUNCTIONS AND CLOSED-LOOP HANDLING QUALITIES SAMPLE CALCULATIONS	
901				A	H/T/C	-	-																		FLYING QUALITIES REPT FOR KAMAN K-108 DYN STAB IN TRANSITIONAL FLT	
902				E/A	T	-	-																		EFF OF GRD PROXIMITY ON A DELTA WING WITH AND WITHOUT JET BLOWING AT IE	
903				E/A	LS	M	WT	X	X																JET-FLAP MODEL WITH MOVING BELT RIG FOR GRD SIM	
904				E/A	ST	M	S																		BASIC AERO CHAR OF JET-FLAP AIRCRAFT INCLUDING GRD EFF	
905				E/A	LS	M	SIM	X																	INVESTIGATION OF VTOL GRD PROXIMITY PROBS EFF OF GRD ON AERO CHAR	
906				E/A	LS	M	WT	X																	VTOL AIRCRAFT IN GRD PROXIMITY GRD EROSION, RECIRCULATION, AND PRESS DISTRIB ON AIRCRAFT	
907				E/A	LS	M	WT	X																	SINGLE AND DOUBLE JET MODELS GRD EFF ON PERF	
908				E/A	H	M	WT																		INVESTIGATION OF VSTOL MODEL TESTING FOR GRD EFF	
909				R	H	-	-																		RECIRCULATION PROB OF JET-LIFT AIRCRAFT FLYING OR HOVERING IN WIND IN GRD PROXIMITY	
910				E	H	M	WT	X																	MULTIPLE LIFTING JETS	
911				E/A	LS	M	WT																		SEMI-SPAN JET-AUGMENTED FLAP MODEL WITH AND WITHOUT GRD BOARD	
912				E/A	LS	M	WT																		AERO CHAR IN GRD EFF DOWNWASH AT HORIZ TAIL PLUS AREA INDICATED	
913				E/A	LS	M	WT	X																	AERO CHAR OF LARGE-SCALE MODEL OF A PROP TILT-WING DURING GRD EFF	
914				E/A	LS/H	M	WT	X																	LIFT LOSS DUE TO SUCTION PRESS INDUCED BY ENTRAINMENT OF VERTICAL EFFLUX FROM LIFTING JETS HOVERING IN AND OUT OF GRD	
915				E/A	ST	M	ST	X																	LONG-AERO CHAR IN GRD EFF 3 GRD HEIGHTS, VTOL AND STOL OPERATION	
916				E/A	LS	M	WT																		LONG, LAT, AND CONT CHAR OF A PROP TILT-WING MODEL IN GRD EFF, RECIRCULATION EFF, MOVING-BELT GRD PLANE, THROUGH REPT	
917				E/A	H	M	ST																			
918				E/A	H/T/C	M	WT																			
919				E/A	LS	M	WT	X																		

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VISTOL CONFIG	NATURE OF REPORT MATERIAL	RIGHT REFORM OF AIRFLOW	TYPE OF TEST	FACE AND MOUNTING	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS									
								STABILITY AND CONTROL																					
								Wing	Test Apparatus	Ducted Propeller	The Dimensional Data	Reference Data	Mach. Lift or Turning	Ground Effect	Propeller Effects	Distal Effects	Control	Longitudinal	Lateral Directional	Dynamic	Substitution	Stability	Optimistic Effects	Eye of Low Airspeed	Control/Systems	Handling Qualities	Handling Qualities		
446	57	TW	E/A	ST	M	ST	X																					4-PROP CONFIGURATION	
447	57	TW/DJ	E/A	H	M	WT	X																					QUANTITATIVE MEASURE OF GRD EFF ON 2 JET VTOL AIRCRAFT	
448	60	TW-E DJ	E/A	H	M	ST	X																					INCLUDES TUFT STUDIES	
456	62	TW	E/A	H	M	ST																						SLIPSTREAM FLOW AROUND VZ.2, X.18, AND ARB CONFIG	
482	64	TP	E	H	M	WT																						FULL-SCALE, HALF-MODEL SIMULATION OF A DUAL TANDEM DUCTED PROP AIRCRAFT. DOWNWASH ALLEVIATION	
484	66	TW/DSS	E/A	T	M	T/W/T	X																					XC-142A MODEL. GRD EFF ON LONG, FORCES AND PITCH MOM	
532	59	S	E/A	S	S	F																						GRD INTERFERENCE STUDY	
538	60	DJ/L-P	R	H/L																								TABULAR SURVEY OF 132 REPORTS ON GRD EFF ON JET LIFT VISTOL AIRCRAFT. REGION OF DEFLECTED JET DESCRIBED	
546	69	DJ/L-P	E/A	H	M	ST	X																					JET-INDUCED LIFT EFF ON VTOL AIRCRAFT. JET DECAY PROFILES. NOZZLE LAT SPACING. 8 JET ARRANGEMENTS. THEORY AND TEST DATA FOR CIRCULAR, SUBSONIC JETS. AERO EFF SINGLE AND MULTIPLE JETS IN AND OUT OF GRD. INFLUENCE OF EXTERNAL FLOWS	
549	69	DJ/L-P	H/T/A	H/L	M	WT/ST																						TRENDS IN LIFT, PITCH MOM, AND ROLLING MOM DUE TO GRD EFF	
561	63	DF	E/A	H	M	WT	X																					GRD EFF ON SIMPLE JET EXHAUSTING BENEATH A FLAT SURFACE	
563	59	DJ	E	H	M	ST																						AERO CHAR OF A COMBINATION OF JET FLAP AND DEFLECTED SLIPSTREAM CONFIG	
566	60	DSS/JF	E/A	ST/L	M	WT	X	X																				XV-48. LOWERED INTERFERENCE EFF IN AND OUT OF GRD IN LANGLEY LOW-SPEED TUNNEL. BASIC DATA IN CRUISE IN LANGLEY HIGH-SPEED TUNNEL	
586	68	L+P	E/A	H/T/C	M	WT	X																					DEVELOPMENT OF DYN MODEL FOR ANALYZING VISTOL TRANSPORTS IN LOW-ALT TURBULENCE IN TRANSITION. FACTORS AFFECTING RESPONSE TO TURBULENCE	
593	68	-	T/A	T	-	-																						GRD EFF ON PERF OF LIFTING FAN	
616	62	FWK	E/A	H	M	WT	A																					FREE-FLY INVESTIGATION TO EVALUATE GRD EFF ON JET-FLAPPED WING	
617	61	JF	E	LS	M	WT SIM																						EFF OF GRD AND JET FREE-STREAM INTERFERENCE ON LONG CHAR	
624	66	DJ/L+P	E/A	LS	M	WT	A																					INTERFERENCE EFF BETWEEN LIFTING JETS. FREE-STREAM VELOCITY, AND MODEL SURFACES AT LOW FWD SPEEDS. EFF ON LONG AERO CHAR. VARIOUS JET CONFIG AND WING HEIGHTS. GRD EFF	
625	64	L+P	E/A	LS	M	WT	X																						FLOW-FIELD CHAR AND GRD INFLUENCE ON MODEL WITH JET-AUGMENTED FLAPS. DOWNWASH AND DOWNWASH GRADIENTS
628	57	JF	E/A	LS	C	WT	X	X																				GRD EFF ON CIRCULAR AND ANNULAR NOZZLES	
629	57	-	E/A	ST	C	ST																						TECH AND OPERATIONAL LESSONS FROM XC-142 PROGRAM. W-T and FLY-TEST RESULTS COMPARED.	
632	68	TW	R/D	H/T/C																									VISTOL AERO RESEARCH AT RAE 1962-86. JET LIFT, FAN LIFT, B.C. JET FLAPS. GRD SIM.
653	66	S	R/D	H/T/C																									A FORMULA DERIVED BY CONFORMAL TRANSFORMATION FOR LIFT INDUCED BY 90° JET FLAP IN GRD EFF. COMPARISON WITH OTHER THEORY AND EXPERIMENT
654	62	JF	T/A	LS																									

* See tab 9B for key to summary

TABLE 9.A. (CONT'D)

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	PILOT ROOM OR AIRBOM	TEST ARTICLE	TYPE OF TEST	Wing	AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS					
									STABILITY AND CONTROL															
									Wing	Free Propeller	Free Propeller	Two Dimensional Data	Positive Data	Max. Lift	Control	Longitudinal	Lateral/Directional	Dynamics		Stability	Stations	Operational Tests	Use of Low Thrust	Heading Qualities
5.5 (CONT)	609	68	L+P	E/A	T/C	M	WT							X	X						X	LONG AND LAT DIR CHAR OF JET-LIFT MODEL GRD EFF. CONTROL EFFECTIVENESS. EFF OF POWER VARIATION OF LIFT JETS		
	671	63	L+P	E/A	H/L	M	WT															SHORT SC-1 THRUST LOSS AS FUNCTION OF WING HEIGHT ABOVE GRD FOR JET-LIFT SCHEMES. THRUST LOSS REDUCTION		
	678	64	L+P	E/A	H	M	ST															INLET TEMPERATURE RISE IN GRD EFF AND ITS EFF ON LIFT		
	5.6	175	56	-	T/A	S	-																	
	210	61	-	E/A	H/T	SIM	SIM																GYROSCOPIC CROSS COUPLING, PITCH-ROLL	
	211	61	-	E/A	H/T	SIM	SIM																GYROSCOPIC CROSS COUPLING, PITCH-YAW	
	222	63	TS/DSS	PR	S	P	F																X:13 AND VZ-3	
	554	58	TS	E/A	H/T	PM	WT																X:13	
	630	63	-	A/D	H/L	-	-																STAB DUE TO GYROSCOPIC FORCES	
5.7	18	63	TW	A/E	H/T	-	-																MECHANICAL GYROSCOPIC STABILIZER APPLIED TO TILT-WING VTOL AIRCRAFT. DESIGN CRITERIA. PERF. DESIGN FEATURES	
	18	61	-	DS	H/T	-	-																FEASIBILITY STUDY	
	24	66	FW	E/PR/A	H	SIM	SIM																KV-5A FLT SIMULATOR STUDY OF HOVERING IN GUSTY COND. OPTIMIZATION OF STAB AUGMENTATION GAINS	
	53	61	-	D	H/T	-	-																V/STOL CONT SYS DESIGN	
	67	66	DR	D	H/T/R	-	-																DESCRIPTION OF X-22A VAR STAB SYS	
	176	60	-	A	M	-	-																	
	177	62	-	A/D	H	S/M/F	-																	
	201	62	L+P	C	H/T	P	F																	SHORT SC-1 CONTROL SYS
	202	60	L+P	A/T/E	H/T	P	F																	SHORT SC-1
	205	60	S	A/E/PR	S	SIM	SIM																	FACTORS AFFECTING PILOTTED FLT SIM. USE OF SIMULATORS TO STUDY FLT TECHNIQUES
	208	64	DJ/L+P	A	H	-	-																	MIXED CONTROL SYS TO HOVER UNSTABILIZED JET-LIFT AIRCRAFT. CONTROL SYS MOM A FUNCTION OF STICK POS AND RATE OF CHANGE OF STICK POS
	312	62	L+P	D	T	P	F																	SHORT SC-1 "LIFT COMPENSATION"
	621	65	DJ	E/PR	H/L	E	F																	HOVERING VTOL AIRCRAFT (X-14A) WITH VARIATION IN CONT POWER AND STICK TRAVEL
	676	62	-	A	H/T	-	-																	
	690	63	-	A/D	H/L	-	-																	STAB DUE TO GYROSCOPIC FORCES

* See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/TOL CONCEPT	NATURE OF REPORT MATERIAL	NIGHT BRIDGE OR AIRBORNE	TEST ARTICLES		AREAS OF INVESTIGATION OR ANALYSIS										COMMENTS															
								STABILITY AND CONTROL																									
								Yaw	Pitch	Roll	Lateral Directional	Directional Stability	Directional Control	Control	Longitudinal	Yaw	Pitch		Roll														
SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/TOL CONCEPT	NATURE OF REPORT MATERIAL	NIGHT BRIDGE OR AIRBORNE	TEST ARTICLES	TYPE OF TEST	Yaw	Pitch	Roll	Yaw	Pitch	Roll	Yaw	Pitch	Roll	Yaw	Pitch	Roll	Yaw	Pitch	Roll	Yaw	Pitch	Roll								
88	10	62	-	D	LS	P	F	X																								SKYLARK (SINGLE ENGINE LIGHT AIRCRAFT)	
16	63	TW	-	A/E	H/T		-																									MECHANICAL GYROSCOPIC STABILIZER APPLIED TO TILT-WING VTOL AIRCRAFT. DESIGN CRITERIA, PERF. DESIGN FEATURES	
21	83	-	-	D	H/T	SIM	SIM																									MECHANICAL V/STOL CONT.SYS	
47	88	S	R/D/P/R/A	S	S		-																									AIRWORTHINESS STANDARDS FROM RECOMMENDATIONS OF AEROSPACE INDUSTRIES ASSN., FAA DRAFT	
46	98	DP	T/E	H	H	C	ST	X																								THRUST CONTROL BY RUDDERS AT DUCT OUTLETS	
84	84	DBS	A	LS	LS	SIM	SIM																									OTHER AIRCRAFT. SHORT-FIELD LGD CHAR. OF STOL AIRCRAFT FROM PERF STUDIES. MANUEVER DYN ANALYSES, AND FLT SIM	
90	90	-	-	E/P/R	H	M	F																									CRITICAL DEMANDS ON VTOL ATTITUDE. APPLICATION OF MANUEVERING CRITERIA USING VAR-STAB AIRCRAFT	
98	94	-	-	R/A	LS	-	-																									VTOL CONT CRITERIA. DATA FROM INDUSTRY AND NASA CORRELATED. COMPARISON WITH CRITERIA FROM HELICOPTER MIL SPEC. AGARD J08. AND MIL F 8785	
124	88	S	S	R/A	H/T	-	-																									DYN AND CONT REQUIREMENTS FOR VTOL, BASED ON HANDLING-QUALITY EXPERIMENTS.	
127	98	S	S	D/A	H/T	P	F																									LONG HOVER AND TRANSITION	
142	83	S	A	A	H	-	-																									SEVERAL TEST-BED AIRCRAFT	
180	88	FP	FP	E/A	H/T	C	ST	X																								HANDLING QUALITIES, EST OF CONT POWER, AND CONT THRUST REQ. CONTROL SYS DESIGN CRITERIA	
180	88	DJ	DJ	E/A/P/R	H	P	F/SIM																									MONOCYCLIC PROP PITCH FOR LONG CONT	
202	80	L+P	L+P	A/T	H/T	P	F																									X-14A. UTILITY OF DIRECT SIDE-FORCE MANUEVERING DEVICE FOR VTOL AIRCRAFT	
209	84	-	-	P/R/A	LS/H	E	F																									SHORT SC-1	
212	86	-	-	PR	H/C	E	F																									EFF OF STATIC DIR STAB ON HANDLING QUALITIES AND DIR SENSITIVITY AND DAMPING	
227	88	FW/F/FP	FW/F/FP	R/A	H/T	-	-																										SIM OF VTOL CONT REQUIREMENTS USING VAR-STAB HELICOPTER
238	82	DJ	DJ	E/A	ST/LS	C	ST/MT																										CLOSED-LOOP DYN RESPONSE OF VTOL AIRPLANE PILOT, AND AUTO STABILIZATION SYS SHOWING IMPORTANCE OF LOW-SPEED CONT REQUIREMENTS
241	86	-	-	E/A	H	SIM	SIM																										JET DEFLECTOR TESTS AND COMMENTS
282	86	TW	TW	# E/A	H	M	ST	X																									6° OF FREEDOM MOTION SIMULATOR FOR STUDYING CONT SYS REQUIREMENTS. SIMULATOR CHAR
287	84	S	S	R/D	H/LS	-	-																										GRD EFF ON PLAIN, SINGLE SLOTTED, AND DOUBLE SLOTTED FULL SPAN FLAPS USED FOR YAW CONT
288	84	DJ/L+P	DJ/L+P	A	H	-	-																										LOW-SPEED CONT SYS REQ FOR VTOL. GUIDANCE FREQUENCIES, ATTITUDE CONT. GENERATION OF MOMENTS DISCUSSED. STABILIZATION DEVICES. CONT SYS OF GEN V101 TILT-ENGINE CONFIG DESCRIBED
290	89	S	S	R/A	C/T/H	SIM	SIM																										"WIKED" CONT SYS TO HOVER UNSTABILIZED JET-LIFT AIRCRAFT. CONT SYS MOM. A FUNCTION OF STICK POS AND RATE OF CHANGE OF STICK POS.
313	89	TW	TW	E/A	T	M																											IND. AMER. ROCKWELL RESEARCH IN FLT CONT AREA. STUDY OF VTOL FLT CONT DESIGN WITH IPR CAPABILITY. LGD PROB FROM CONVENTIONAL FLT TO HOVER.
																																	4-POINT CONTROL

* See table 9B for key to summary

TABLE 9.A (CONTD)*

SUBJECT INDEX CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF RESEARCH MATERIAL	PILOT REQUIREMENTS OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS													COMMENTS						
								Wing	Free Propeller	Ducted Propeller	Two Dimensional Data	Pressure Data	Mass Time Turning	Control Effort	Propeller Moment	Disturbance Ratio	Control	Longitudinal	Lateral/Directional	Yaw		STABILITY AND CONTROL					
																						Heading Changes	Heading Changes	Heading Changes	Heading Changes	Heading Changes	
338	61	DP	T	H/S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	HOVERING IN STILL AIR AND GUST COND. GLIDE APPROACHES AT LOW SPEED. DAMPING AND SENSITIVITY.	
369	58	DSS	E/A	ST	C	ST	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	WING PLUS PROPS. LE SLAT	
382	88	-	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CONT PROBS OF LARGE V/STOL TRANSPORTS. CONT POWER REQ. THEIR INFLUENCE ON HARDWARE DESIGN AND AIRCRAFT WEIGHT.	
384	88	L-P	E/A	F/S	E	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	V/STOL HANDLING QUALITIES. CONT MODES COMPARED IN TERMS OF PILOT ACCEPTANCE AND CONT POWER REQ.	
409	88	-	E/P/R/A	H/S	SIM	SIM																				FLT-RESEARCH PROGRAM TO DETERMINE CONT POWER AND CONT SENSITIVITY REQ DURING VISUAL HOVER AND LOW-SPEED APPROACH (VAR-STAB HELICOPTERS)	
422	80	BLC	E/A/T	LS	M	WT	X																			LIKE F-104. SEVERAL SPOILERS, 2AILERON CONFIGS. 3 TAIL HEIGHTS	
481	82	TW	E/A	H/T	P	F																				AILERONS FOR YAW CONTROL (VZ2)	
517	82	HL	D	LS	P	F																				ULTRA LOW-SPEED CONT SYS	
522	82	DJ	E/A	H	P	E																				HOVERING CONT REQUIREMENTS OF VAR STAB AND CONT.	
538	83	-	A	H	SIM	SIM																				AUTOPLOTT FOR V/STOL HOVER CONT. CONT SYS NONLINEARITIES. METHOD FOR ANALYZING STAB AND CONT CHAR OF AUTOPILOT	
564	87	-	E/A	LS	M	WT																					JET AND FREE STREAM INTERFERENCE EFF ON ROLL CONT OF V/STOL AIRCRAFT IN TRANSITION
572	86	DP	E/A	H/T/C	M	WT	X																			LONG AERO AND CONT CHAR OF DUCTED-PROP V/STOL MODEL	
577	86	L-P	A	H	-	-																				PROPULSION SYS AND/OR CONT SYS-INTERFACE FOR HOVER CONT CONCEPTS USING LIFT + LIFT CRUISE PROPULSION	
583	88	-	T/A	T	-	-																					DEVELOP DYN MODEL FOR ANALYZING V/STOL TRANSPORTS IN A LOW-ALT TURBULENCE IN TRANSITION. FACTORS AFFECTING RESPONSE TO TURBULENCE
514	82	DSS	E/A	T	P	F																					LONG TRIM CHAR (VZ3)
643	84	-	R/D	H/T	-	-																					QUALITATIVE DISCUSSION OF STAB AND CONT PROBS OF V/STOL AIRCRAFT
658	88	L-P	E/A	T/C	M	WT																					LONG AND LAT DIR CHAR OF JET-LIFT MODEL. GRD EFF CONT EFFECTIVENESS. EFF OF POWER VARIATION OF LIFT-JETS
59	183	89	TW/DSS	E/A	LS	M	WT																				LONG AERO CHAR EFF OF PROP-ROTATION DIRECTION
194	86	TW	E	LS	M	WT	X	X																			EFF OF PROP-ROTATION DIRECTION, FLAPS, SLATS, AND FENCES ON AERO AND FLOW CHAR
185	86	TW	E	LS	M	WT	X	X																			EFF OF PROP-ROTATION DIRECTION, FLAPS, SLATS, AND FENCES ON AERO AND FLOW CHAR
185	87	TW	E	LS	M	WT	X	X																			EFF OF PROP-ROTATION DIRECTION, FLAPS, SLATS, AND FENCES ON AERO AND FLOW CHAR
187	87	TW	E	LS	M	WT	X	X																			EFF OF PROP-ROTATION DIRECTION, FLAPS, SLATS, AND FENCES ON AERO AND FLOW CHAR
188	87	TW	E	LS	M	WT	X	X																			EFF OF PROP-ROTATION DIRECTION, FLAPS, SLATS, AND FENCES ON AERO AND FLOW CHAR
485	43	-	E/A	LS/C	M	F																					EFF OF PROP-ROTATION DIRECTION ON LAT STAB CHAR

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SR (CONT)	RESEARCH NUMBER	YEAR OF PUBLICATION	VISTOL CONCEPT	NAME OF REPORT MATERIAL	FLIGHT MODE ON AIRFLOW	TEST ARTICLES	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS															COMMENTS
								STABILITY AND CONTROL															
								Roll	Pitch	Yaw	Roll/Pitch	Roll/Yaw	Pitch/Yaw	Roll/Pitch/Yaw	Control	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	Control/Trim	
810	43	-	E/A	LS/C	PM	WT	X	X	X	X	X	X	X	X	X	X	X	X	X	EFF OF PROP-ROTATION DIRECTION ON STATIC STAB			
531	64	TW/D08	E/A	T	M	F		X	X	X	X	X	X	X	X	X	X	X	X	DYN LAT STAB AND CONT. REMOTE-CONTROL MODEL EFF OF WING STALLING AND STALL CONTROL DEVICES			
810	30	PF	R/D/A	L/S	-	-	X													LIFT ON A WING IN PROP SLIPSTREAM			
59	66	DJL-P	T/A	H/T	-	-		X												SEMEMPirical APPROACH TO PREDICTING PERF. LOSSES AND PITCH MOM. CAUSED BY JET INTERFERENCE			
91	66	TW/D08	N/A	T	-	-														WING STALL DURING TRANSITION, STALL-FREE TRANSITION, EFF OF SLIPSTREAM ON PITCH MOM			
128	63	TW/D08	T	L/S	-	-														METHOD PREDICTING WING SLIPSTREAM INTERACTIONS, LIFTING-SURFACE THEORY			
186	66	TW/D08	T	H/T	-	-		X												WING LOADING OF ARBITRARY PLANFORM EQUAL TO OR LESS THAN SPAN OF PROP JET			
171	68	B	T	C/B	-	-														RESEARCH ON PROP FLOW FIELD ASSOCIATED WITH TYPICAL VISTOL OPERATIONS			
181	61	F	E/A	L/S	M	WT	X													AERO FORCES AND MOM ON JET-FLAPPED WING IN PRESENCE OF PROP SLIPSTREAM AND FREE STREAM			
183	68	TW/D08	E/A	L/S	M	WT		X												LONG AERO CHAR. EFF OF PROP-ROTATION DIRECTION			
226	64	D08	A	L/S	-	-														AERO FORCES ON WING-PROP COMBINATIONS INCL SLIPSTREAM EFF THEORY APPLIED TO 2- AND 4-PROP VISTOL CONFIG			
263	66	D08	A	L/S	-	-														EQ AND CHARTS FOR LIFT AND LONG - FORCE COEFFS OF WINGS IN PROP SLIPSTREAMS, SAMPLE CALCULATIONS			
311	68	DJL-P	E/A	L/S	M	WT			X											FLOW IN JETS EJECTED NORMAL TO THE WIND			
382	66	DJL-P	R/D	H	-	-		X												AERO OF JET VISTOL ENGINE INSTALLATIONS, JET INDUCED EFF. EFF OF GRD, JET WAKE, AND INLET LIP SHAPE			
388	66	DJL-P	R/D	T	M	WT	X													CHAR OF JET POWERED VISTOL FIGHTER CONFIGS. INTERFERENCE EFF DUE TO INTERACTION BETWEEN FREE STREAM AND JET WAKES			
400	68	DJL-P	E/A	L/S	M	WT														PATH AND SHAPE OF WAKE FROM A SINGLE JET EXITING AT LARGE ANGLES TO FREE STREAM			
404	68	D08	E/T/A	L/S	M	WT	X													AERO CHAR OF PROP-WING-FLAP SYS. EQ FOR EST AERO FORCES. PROP SLIPSTREAM EFF COMPARISON OF TEST AND THEORY			
467	67	D08	E/A	H/T	M	WT	X													WING WITH DUCTED FANS AND DOUBLE-SLOTTED FLAPS. DUCT POS AND DUCT EXIT CONFIG VARIED. FLAP TURNING EFFECTIVENESS			
477	60	PF	R/D	L/S	-	-														PROP EFFECTS ON STAB AND CONT OF VISTOL AIRCRAFT			
508	68	PF/TW	E/A	L/S	-	-														LIFT-GENERATING CAPABILITIES OF WINGS EXTENDING THROUGH PROP SLIPSTREAMS			
582	37	PF	A	L/S	-	-		X												METHOD CALCULATING INCR IN LIFT OF WING DUE TO PROP SLIPSTREAM. COMPARISON WITH TEST			
584	67	-	E/A	L/S	M	WT			X											JET AND FREE-STREAM INTERFERENCE EFF ON ROLL CONTROL OF VISTOL AIRCRAFT IN TRANSITION			
612	63	FIF	E/A	L/S	M	WT	X													INTERFERENCE LOADS DUE TO INTERACTION BETWEEN MAINSTREAM AND EFFLUX EFF ON LIFT AND PITCH MOM.			
620	61	TW/D08	E/A	L/S	C	WT	X													EFF OF 2-DIM STREAM-SHEAR FLOW ON AIRFOIL MAX LIFT. PROP TO WING CHORD RELATIONSHIP			

* See table 9B for key to summary

TABLE 9.A (CONT'D)*

S. NO (POINT)	REFERENCE NUMBER	YEAR OF PUBLICATION	VTOL CONCEPT	NAME OF REPORT OR JOURNAL	RIGHT BOARD OR AIRBORN	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS
								STABILITY AND CONTROL											
								Roll	Pitch	Yaw	Roll/Pitch	Roll/Yaw	Pitch/Yaw	Roll/Pitch/Yaw	Control	Control/Transfer	Transfer	Transfer/Control	
622	80	-	T/A	-	-	-	X	X	X	X	X	X	X	X	X	X	2-DIM EFF OF SLIPSTREAM SHEAR ON AIRFOIL CHAR		
624	86	DJ/L-P	E/A	U9	M	WT	X	X	X	X	X	X	X	X	X	X	EFF OF GRD AND FREE STREAM INTERFERENCE ON LONG CHAR		
626	82	TW/DSS	E/A	ST	M	ST	X	X	X	X	X	X	X	X	X	X	PROP SLIPSTREAM EFF OF 8-PROP VTOL MODEL AT STATIC THRUST		
630	83	TW/DSS	E/A	T	M	WT	X	X	X	X	X	X	X	X	X	X	EFF OF NONUNIFORM FLOW AND SLIPSTREAM - FREE STREAM INTERACTION ON WING AERODYNAMICS		
670	83	TW/DSS	T	HT/C	-	-	X	X	X	X	X	X	X	X	X	X	LIFTING-SURFACE THEORY FOR WINGS EXTENDING THROUGH INCLINED JETS		
511	1	87	-	E/A	ST/LS	M	ST/LS	X	X	X	X	X	X	X	X	X	RECIRCULATION EFF OF VERT AND INCLINED JET; ON HORIZ SURF		
39	88	DJ/L-P	T/A	HT	-	-	X	X	X	X	X	X	X	X	X	X	SEMEMPirical APPROACH TO PREDICTING PERF LOSSES AND PITCH MOMENTS CAUSED BY JET INTERFERENCE		
82	87	-	R/D	HT	-	-	X	X	X	X	X	X	X	X	X	X	AERO INTERFERENCE EFFECTS OF JET LIFT SYSTEMS		
63	88	L-P/DJ	R/A	HT	-	-	X	X	X	X	X	X	X	X	X	X	PROPULSION SYSTEM - AIRFRAME-INTERFERENCE EFF, LIFT-ENGINE-INLET-FLOW DISTORTION, EXHAUST GAS REINGESTION		
88	88	-	E/D	LS	-	-	X	X	X	X	X	X	X	X	X	X	COANDA EFF AT WIDELY SEPARATED DEFECTION SURFACES		
84	84	DJ/L-P	E/A	H	M	WT	X	X	X	X	X	X	X	X	X	X	STATIC PRESS DISTRIB ON WALL AROUND A CIRCULAR JET EXHAUSTING NORMALLY FROM A PLANE		
85	85	DJ	A/T/E	H/LS	M	WT	X	X	X	X	X	X	X	X	X	X	WALL INTO AN AIRSTREAM		
89	89	DJ	E/A	T	M	WT	X	X	X	X	X	X	X	X	X	X	FLOW FIELD UNDER A UNIFORM CIRCULAR JET NORMAL TO AND IMPINGING ON GRD, JET-GRD-PLANE INTERACTION		
114	83	DJ/L-P	E/A	L8/H	V	WT	X	X	X	X	X	X	X	X	X	X	JET LOCATION INTERFERENCE EFF ON LONG AERO CHAR OF JET VTOL MODEL		
121	87	-	E/A	ST	N	ST	X	X	X	X	X	X	X	X	X	X	RECIRCULATION PROB OF JET-LIFT AIRCRAFT FLYING OR HOVERING IN WIND IN GRD PROXIMITY		
204	87	F/W	E/D/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	RECIRCULATION EFF OF VERT JET DIRECTED DOWNWARD ON HORIZ SURF		
208	87	-	-	-	-	-	X	X	X	X	X	X	X	X	X	X	INFLUENCE OF FAN EFFLUX FLOW ON LIFT AND PITCH MOMENTS OF FUS, WING, AND TAIL PLANE		
214	86	DJ/L-P	E/T/A	H	M	ST	X	X	X	X	X	X	X	X	X	X	REVIEW OF JET-EFFLUX STUDIES: ANALYTICAL DESCRIPTION OF FLOW FIELD CREATED BY VTOL AIRCRAFT		
240	87	F/W/FIF	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	LIFT LOSS DUE TO SUCTION PRESS INDUCED BY ENTRAINMENT OF VERT EFFLUX FROM LISTING JETS HOVERING IN AND OUT OF GRD		
201	87	DJ/L-P	E/A	LS	M	WT	X	X	X	X	X	X	X	X	X	X	NACELLE WITH 2 LIFTING FANS IN TANDEM: EFF OF EFFLUX ON LIFT		
287	86	DJ/L-P	T/A	H/LS	-	-	X	X	X	X	X	X	X	X	X	X	HOT GAS INGESTION, AERO BLOCK-DOWN, JET INTERFERENCE IN TRANSITION		
280	88	F/W	D/L-P	A/D	H	-	X	X	X	X	X	X	X	X	X	X	FORMULAS FOR APPROX CALC OF FLOW PHENOMENA FOR A TURBULENT JET COLLIDING WITH A FLAT SURF		
352	86	DJ/L-P	R/D	H	M	-	X	X	X	X	X	X	X	X	X	X	ANALYTICAL MODEL OF JET INTERFERENCE ANALYZED SIM MODEL OF JET EFFLUX SUPERIMPOSED ON		
375	87	L-P	E/A	H	M	S	X	X	X	X	X	X	X	X	X	X	RELEASE AND REINGESTION OF VERTICAL AIRBORN VORTEX LATTICE TECHNIQUE DISCUSSED, APPLIED TO P 1127 THEORY AND TEST COMPARED		
																	AERODYNAMICS OF JET VTOL ENGINE INSTALLATIONS, JET INDUCED EFF OF 3RD, JET WAKE, AND INLET LIP SHAPE		
																	PARAMETRIC DATA ON GAS INGESTION AND JET EFF IN JET POWERED VTOL VEHICLES IN GRD PROXIMITY		

* See table 9B for key to terminology

TABLE 9-A (CONT'D)

PROJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	VTOL CONCEPT	NATURE OF REPORT MATERIAL	PILOT REQUIRE OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	AREAS OF INVESTIGATION OR ANALYSIS			STABILITY AND CONTROL										COMMENTS																																						
								Fores and Aft			Wing			Free Flight			From Flight			From Directional Data			Pressure Data			Max Lift or Turning			Ground Effect			Propeller Effect			General			Longitudinal			Dynamic			Stability			Oscillatory Effect			Type of Test Method			Modeling/Analysis			Modeling/Analysis			
								X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X									
S.11 (CONT)	362	64	FV/FIF	E/A	H/S	M	WT/ST										X																																				FLOW UNDER NORMALLY IMPINGING JET INVESTIGATED. PROPERTIES OF FLOW NEAR GRD ROTORS AND DUCTED FANS.						
	397	66	DJ/LP	E/A	T	M	WT	X																																													AERO CHAR OF A 5-JET VTOL CONFIG. HORIZ-TAIL-POSITION EFFECTS. GRD PROXIMITY.						
	400	66	DJ/LP	E/A	LS	M	WT																																															PATH AND SHAPE OF WAKE FROM A SINGLE JET EXTING AT LARGE ANGLES TO FREE STREAM AERODYNAMICS AND FLYING QUALITIES. JET INTERFERENCE. EFF OF MULTIPLE JETS AND WING PLANFORM. INLET EFFECTS. INGESTION CONTROL POWER.					
	414	64	DJ/LP	R/D	LS		-																																															JET INDUCED LIFT LOSSES OF JET-VTOL CONFIGURATIONS.					
	424	66	DJ/LP	-	H	M	ST																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.							
	434	66	FW	A	-	-	-																																														METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.						
	444	62	DJ/LP	E/A	H	M	WT																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.							
	479	64	L-P/RIW	E/A	LS	M	WT																																												METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.								
	537	67	DJ/LP	A	H/S	-	-																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.							
	544	62	DJ/LP	T	H/S	-	-																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.							
	548	66	DJ/LP	E/A	H	M	ST	X																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.						
	550	66	DJ/LP	ET/A	H/S	M	WT/ST																																													METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.							
	563	58	DJ	E	H	M	ST																																															METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.					
	585	61	S	R/D	T	-	-																																																METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	588	61	DJ	E/A	H/T	M	WT	X																																															METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	582	67	DJ/LP	T	H																																																		METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	585	66	L-P	E/A	H/T/C	M	WT	X																																															METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	609	62	FIF	E/A	H	M	WT	X																																															METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	626	64	L-P	E/A	LS	M	WT	X																																															METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	626	66	DJ	E/A	T																																																			METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.			
	677	63	DJ/LP	E/A	LS	M	WT																																																METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.				
	648	66	FV/FIF	R/A	S																																																			METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.			
	648	66	FV/FIF	R/A	H/T																																																			METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.			
	667	66	DJ/LP	R/A	H/S																																																				METHOD FOR STUDYING EFF ON AERO CHAR OF WINGS IN VICINITY OF LIFTING PROPULSION DEVICES. STAB AND CONT. GRD EFF. AND W-T CORRECTIONS.		

• See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT NUMBER	CLASSIFICATION	REFERENCES NUMBER	YEAR OF PUBLICATION	VISTOL COMMENT	NATURE OF REPORT MATERIAL	RIGHT RECORD OR AIRBORNE	TEST ARTICLES	TYPE OF TEST	WING	FUSELAGE	TAIL	PROP	JET	AREAS OF INVESTIGATION OR ANALYSIS											COMMENTS	
														STABILITY AND CONTROL	Cross Section	Wing	Fuselage	Empennage	Powerplant	Propellers	Propellers	Propellers	Control Surfaces	Control Surfaces		Control Surfaces
5.11 (CONTD)		67	DJ/L-4	T	LS	-	-	-	X																INTERACTION BETWEEN A JET EXHAUSTING NORMALLY FROM A LIFTING SURF INTO A UNIFORM STREAM. COMPARISON WITH TEST	
		68	-	T/E/A	LS	M	WT		X																POTENTIAL FLOW MODEL OF A CIRCULAR JET ISSUING NORMALLY FROM AN INFINITE FLAT PLATE INTO A DEFLECTING STREAM. FLOW SURVEY. COMPARISON WITH TEST	
5.12		16	-	R/D	S	-	-																		SEVERAL REPORTS ON VISTOL MODEL TESTING. WT. PRINCETON DYNAMIC MODEL TRACK. NASA TECHNIQUES	
		74	TW/DDB	R/A	H/T/C	M/PM	WT/F																		WT. FLY-TEST PROGRAM TO DETERMINE STATUS OF WT. TEST TECHNIQUES	
		137	-	D	LS	-	-																			DESCRIPTION OF PRINCETON DYNAMIC MODEL TRACK (VSTOL MODEL TESTING)
		145	F1/F	E/A	LS	M	WT	X																		EFFECT OF SCALE AND TUNNEL WALLS ON AERO CHAR
		174	TW	E/A	T	M	WT	X																		WT. DATA CORRELATION
		250	TW/DDB	E/A	T	M	WT	X																		TUNNEL WALL EFFECT ON DEFLECTED-SLIPSTREAM AND TILTING MODELS
		272	S	T/A/R	LS	-	-																			LINEARIZED THEORY OF WT. JET BOUNDARY CORRECTIONS AND GRID EFF. INTERFERENCE FACTORS AS A FUNCTION OF WAKE DEFLECTION
		274	-	D	LS	-	-																			FEATURES TO BE CONSIDERED IN APPLYING WALL-INTERFERENCE CORRECTIONS TO VSTOL DATA
		275	-	R/D/T	LS	-	-																			WT WALL EFFECT ON EXTREME FORCE COEFFS. EFF OF NONUNIFORM INTERFERENCE GRADIENTS
		278	S	R/D	T	M/PM	WT/F																			CORRELATION OF WT. AND FLY-TEST DATA ON VISTOL AIRCRAFT. WT. WALL CORRECTIONS SIZING CRITERIA
		365	S	D	LS	-	-																			WT WALL EFFECTS IN VSTOL TESTING FROM EXPERIENCE OF LANGLEY RESEARCH CENTER
		380	-	E/A	-	S	WT																			THEOR AND EXPERIMENTAL STUDY TO DEVELOP VISTOL WT. WALLS
		428	-	D	H/T/C	-	-																			WIND TUNNEL FOR LOW FWD SPEED, HOVER, AND TRANSITION TESTING
		428	-	D	H/T/C	-	-																			LARGE SCALE CANADIAN VISTOL TUNNEL
		440	DP	E/A	H/T	M	WT																			WT BOUNDARY EFFECTS RELATED TO VISTOL DATA
		441	-	R/D	LS	-	-																			WT BOUNDARY CORRECTIONS APPLICABLE TO VSTOL MODEL TESTING
		471	L	A/R	LS	-	-																			3 MODEL TEST TECHNIQUES USED BY NASA TO INVESTIGATE DYN STAB OF VISTOL MODELS, AND TEST RESULTS
		478	TW	R/D	H/T	-	-																			WT TEST METHODS FOR POWERED VISTOL MODELS. PROP EFF ON STAB AND CONT OF VSTOL AIRCRAFT
		582	S	D	S	-	-																			LOW SPEED WT DESIGN AND TECHNIQUES. SIZE AND TEST SECTION REQ. NEW TUNNELS
		611	-	R/T	H/T	-	-																			TECHNIQUES FOR TESTING LIFTING-JET OR LIFTING-FAN MODELS
		652	-	T	LS	-	-																			METHODS TO EXPEDITE WT TESTING OF JET AND LIFT-FAN MODELS
		653	S	R/D	H/T/C	-	-																			VISTOL AERO RESEARCH AT RAE, 1962-66. JET LIFT. FAN LIFT. BLC. JET FLAPS. GRID SIM. WT TEST TECHNIQUES

* See table 9B for key to summary

TABLE 9-A (CONT'D)*

SEARCH CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V/STOL CONCEPT	NATURE OF REPORT MATERIAL	FLIGHT MODES OF AIRCRAFT	TEST ARTICLES	TYPE OF TEST	Wing	Fuselage	AREAS OF INVESTIGATION OR ANALYSIS												COMMENTS				
										General	Control	Longitudinal	Lateral Directional	Dynamics	Stability	Structures	Operational Effects	Eng or Prop System	Control Systems	Handling Qualities	Manning		Costs			
6.13	14	68	S	R/D	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	AERO PROBS AND RES FOR V/STOL AIRCRAFT	
	17	67	-	R/D	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SURVEY OF FLT MECHANICS OF VTOL AIRCRAFT, INCL TECHNOLOGY, EFF OF VEHICLE CHAR	
	28	67	-	R/A	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SURVEY PAPERS, THRUST FOR HOVER CONTROL, GRD EFF, JET-INDUCED EFF, REINGESTION	
	44	60	S	R/D	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MASA AMES RESEARCH THROUGH 1960	
	54	68	S	R/A	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PROMISING V/STOL CONFGS, LIFT SYS, PROPULSION, AIRFRAME SYS, DYN AND AERO CHAR, CONTROL SYS	
	96	67	S	E/A	LS	M	WT	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	NATURE OF TURBULENCE IN WAKE OF 2 DIM AIRFOIL	
	100	64	-	-	-	SIM	SIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	METHODS OF MECHANIZING ED OF MOTION USING ANALOG COMPUTER	
	118	67	S	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	METHODS PRODUCING HIGH LIFT, COMPARISON ON BASIS OF MAX LIFT	
	283	60	S	A/R/D	H/T/L/S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EST OF V/STOL CHAR, INTERACTION BETWEEN LIFTING SYS AND PROPULSION WAKES, JET AND PROP SLIPSTREAM INTERACTIONS	
	273	61	S	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	GEN NOMOGRAPHIC SOLUTION FOR INDUCED VEL AND WAKE SKEW ANGLE	
	308	64	DSI/IF	R/D	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	BASIC STOL PERF AND LOW-SPEED CONT AND HANDLING DEVEL. OF HAVILAND AIRCRAFT GO	
	338	61	S	R/A/D	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SUMMARY OF VTOL STATE OF THE ART THROUGH 1961	
	364	61	S	D	H/T/C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PRINCIPLES OF V/STOL AERODYNAMICS REGARDING DESIGN FOR GOOD PERF	
	508	60	DP/FP	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PREDICTION OF OPTIMUM PERF CHAR	
	510	68	S	T/A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LIFT-GENERATING SYSTEMS COMPARED, FIXED WING, ACTUATOR DISK, DUCTED PROP, ANNUAL WING, THEORY AND TEST COMPARED	
	526	68	FW/IF	T	WT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	NUMERICAL SOLUTION OF 3-DIM INCOMPRESSIBLE FLOW PROBS, ITS APPLICATION TO V/STOL CONFLGS
	661	61	S	D	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	AERO ASPECTS OF V/STOL SYS, RESEARCH AT RAE THROUGH 1961, ESPECIALLY DIRECT-LIFT JET, PROP LIFT, JET FLAPS, BLC	
	667	66	-	A	LS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	RELATIONSHIPS INVOLVED IN SHORTENING TAKEOFF AND LANDING DIST OF HIGH-SPEED AIRCRAFT
6.0	12	66	S	R/A/D	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	AERO PROBS OF V/STOL AIRCRAFT	
	13	66	S	R/A	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	RECOMMENDATIONS FOR V/STOL AERO. RESEARCH
	20	66	S	S	H/T/C	S	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PAPERS OF VTOL STOL CONF. 1966
	23	64	S	A/R	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	RESEARCH AND RECOMMENDATIONS ON V/STOL AERODYNAMICS
	32	60	S	S	S	S	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MASA CONF ON V/STOL AIRCRAFT (26 PAPERS)
	37	61	S	B/B	S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MASA V/STOL REPT, BIBLIOGRAPHY AND V/STOL TRANSPORT STUDY

* See table 9B for key to summary

TABLE 9-A (CONTD)*

SUBJECT CLASSIFICATION	REFERENCE NUMBER	YEAR OF PUBLICATION	V STOL CONCEPT	NATURE OF REPORT MATERIAL	RIGHT RECORD OR AIRFLOW	TEST ARTICLE	TYPE OF TEST	WING	AREAS OF INVESTIGATION OR ANALYSIS								COMMENTS
									STABILITY AND CONTROL								
									Rolling Control	Yawing Control	Control Systems	Control Flaps	Control Surfaces	Control Surfaces	Control Surfaces	Control Surfaces	
46	59	S	BIC	S	P	F	X					X				3 ARTICLES ON VSTOL. NASA BIBLIOGRAPHY, REF 37	
49	60	S	S	S	S	S	X									AGARD SYMPOSIUM ON VSTOL AIRCRAFT	
50	66	S	R	S	-	-										DDC VTOL BIBLIOGRAPHY, 1963 - JUNE 1966	
51	68	S	R	S	-	-										DDC VTOL BIBLIOGRAPHY, EXPERIMENTAL VTOL MODELS XV.5, KC 142, X 22, ETC, 1963 - JUNE 1968	
54	68	S	P/D	H/T/C	-	-										VTOL STATE OF THE ART. LIFT SYS, PROPULSION, AIRFRAME SYS, DYN AND AERO CHAR, CONT SY	
76	63	S	BIB	S	-	-										VTOL LITERATURE SURVEY COVERING 1961-62	
77	81	S	BIB	S	-	-										AGARD VSTOL BIBLIOGRAPHY THROUGH 1960	
200	80	S	E/A/D	S	M	WT										LARGE-SCALE, WT STUDIES OF VTOL TYPES. NASA CONF DN VSTOL AIRCRAFT	
243	80	JF	R/R/B	LS	-	-	X									DETAILED JET FLAP REVIEW, THEORIES, DATA BIBLIOGRAPHY	
262	88	S	BIB	S	-	-										VTOL FLYING-QUALITIES BIBLIOGRAPHY	
408	87	S	T/E/A/D	S	-	-										CLASSROOM TEXT ON AERODYNAMICS OF VSTOL FLIGHT	
527	59	DP	R/B/B	S	-	-	X									REVIEW AND BIBLIOGRAPHY	
533	81	B/C/J/F	S	LS	S	S	X									AERO ASPECTS OF VSTOL AIRLINES	
538	88	D/J/L/P	R	H/LS	-	-										TABULAR SURVEY OF 137 REPORTS ON GRD EFF OF JET-LIFT VSTOL AIRCRAFT REGION OF DEFLECTED JET	
586	82	-	B/B/D	LS	-	-										BIBLIOGRAPHY OF PRINCETON LOW-SPEED WORK	

* See table 9B for key to summary

9.1 FREE-PROPELLER CHARACTERISTICS

The methods of this Section are for estimating forces and moments on propellers. The primary purpose of this work is to provide information for analysis of direct propeller effects during the transition flight phase of V/STOL aircraft.

Operation of a propeller in an unsymmetrical flow field results in unsymmetrical loading on the blades as a function of their rotational position, which, in turn, produces forces normal to the thrust axis resulting in pitching and yawing moments. Flow field asymmetries result from either thrust-axis tilt or from flow angles induced by the airplane lifting surfaces. The propellers on V/STOL aircraft will encounter greater asymmetries than those of conventional aircraft because of the greater thrust-axis tilt and greater induced upwash of more effective high-lift devices.

Methods for the prediction of forces and moments on propellers inclined with respect to the free stream are developed by DeYoung in reference 1. DeYoung has generalized existing small-incidence theory (references 2 and 3) using a propeller solidity based on average blade chord. Simple expressions are thus developed for propeller normal (or side) force and some of the principal derivatives. DeYoung develops these expressions by first determining approximate equations of propeller geometry and operating parameters from the theory presented by Ribner in references 2 and 3, and then establishing by statistical means the equation constants and slightly altered functions from computed data of given blade shapes.

DeYoung also derives expressions for the ratio of normal force at high incidence to normal-force derivative at zero incidence, and the ratios of thrust, torque, and power at high incidence to the zero-incidence values.

Reference 5 presents results of a propeller test for three full-scale propellers of different design at nine angles of incidence ranging from 0 to 85 degrees. The operating conditions were selected to simulate the take-off, landing, and transition regimes of V/STOL aircraft. From the data of this reference certain generalizations can be made regarding propeller characteristics likely to be encountered in transition flight. It is shown that the thrust coefficients for given values of blade angle and advance ratio are nearly constant over a large range of thrust-axis angles of attack and that this range decreases with increasing advance ratio. Furthermore, it is shown that, over the same range of thrust-axis angles, the variations of propeller normal force and pitching moment are nearly linear. Using these generalizations it is possible to present approximate methods for the estimation of propeller forces and moments at large angles of inclination from experimental data at small angles of inclination for certain transition programs.

A general notation list is included in this Section for all free-propeller Sections.

The positive direction of forces and moments is shown in figure 9.1-4.

Notation List

A	wing aspect ratio
a_0	blade section lift-curve slope, per rad
B	number of blades

Notation List (continued)

b'	propeller blade chord, ft
\bar{b}'	average blade chord, ft
$b'_{.25, .50, \dots}$	blade chord at $\frac{r}{R} = .25, .50, \dots$, ft
C_N'	normal-force coefficient based on free-stream velocity and propeller disk area, $\frac{N}{q_\infty S_p}$
C_N	normal-force coefficient, $\frac{N}{\rho n^2 D^4} = \frac{\pi J^2}{8} C_N'$
C_T	thrust coefficient, $\frac{T}{\rho n^2 D^4} = \frac{\pi J^2}{8} T_c$
c_r	wing root chord, ft
D	propeller diameter, ft
J	advance ratio, $\frac{V_\infty}{nD}$
J'	modified advance ratio, $J \cos \alpha$
J_{OT}	advance ratio at zero thrust
J_{op}	advance ratio at zero power
N	propeller normal force, lb
n	propeller rotational speed, rps
q_∞	free-stream dynamic pressure, lb/sq ft
R	propeller radius, ft
R_{fus}	maximum fuselage radius forward of propeller plane
r	radial distance to blade element, ft
S_p	propeller disk area, $\frac{\pi}{4} D^2$, sq ft
T	propeller thrust, lb
T_c	thrust coefficient based on free-stream velocity and propeller disk area, $\frac{T}{q_\infty S_p} = \frac{8}{\pi J^2} C_T$
x	longitudinal coordinate measured positive forward from wing leading edge, ft
y	lateral coordinate measured positive to right of plane of symmetry, f
Δ_y	lateral distance from thrust axis of one propeller blade to element of another, ft

Notation List (continued)

V_{∞}	free-stream velocity, ft/sec
α	wing angle of attack measured from zero lift, deg
α_{in}	inflow angle at propeller disk, deg
β	blade angle at .75R blade station, deg
$\epsilon_{z_{slip}}$	upwash induced by propeller slipstream, positive downward, deg
σ	propeller solidity, ratio of blade element area to annulus area at .75R
σ_e	effective propeller solidity (propeller solidity based on average blade chord)
δ_f	force phase angle, deg
Subscripts	
α_{in}	differentiation with respect to inflow angle, α_{in}
L.75	left blade position at three-quarters radius point
R.75	right blade position at three-quarters radius point
fus	fuselage

REFERENCES

1. DeYoung, J.: Force and Moment Derivatives Due to Propellers of Arbitrary Configuration Inclined with Respect to Free Stream. AIAA Preprint No. 64-169, 1964. (U)
2. Ribner, H. S.: Formulas for Propellers in Yaw and Charts of the Side-Force Derivative. NACA TR 819, 1945. (U)
3. Ribner, H. S.: Propellers in Yaw. NACA TR 820, 1945. (U)
4. Ribner, H. S.: Notes on the Propeller and Slipstream in Relation to Stability. NACA ARR L4I12a, 1944. (U)
5. Yaggy, P. F., and Rogallo, V. L.: A Wind-Tunnel Investigation of Three Propellers Through an Angle-of-Attack Range From 0° to 85° . NASA TN D-318, 1960. (U)
6. McLemore, H. C., and Cannon, M. D.: Aerodynamic Investigation of a Four-Blade Propeller Operating Through an Angle-of-Attack Range From 0° to 180° . NACA TN 3228, 1954. (U)

7. Draper, J. W., and Kuhn, R. E.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack Up to 90° . NACA TN 3304, 1954. (U)
8. LaMont, C. W.: Theoretical Forces on Tilted Propellers (Unpublished) Douglas Aircraft Company, Inc., 1961. (U)
9. Dong, J. C.: A Method of Estimating the Propeller Shaft Loads Induced by First Order Excitations. Curtiss-Wright Report C-2378, 1952. (U)
10. Dong, J. C.: Some Theoretical and Experimental Procedures for Determination of the Propeller First-Order Excitation Factor, Aq. Curtiss-Wright Report C-2540, 1956. (U)

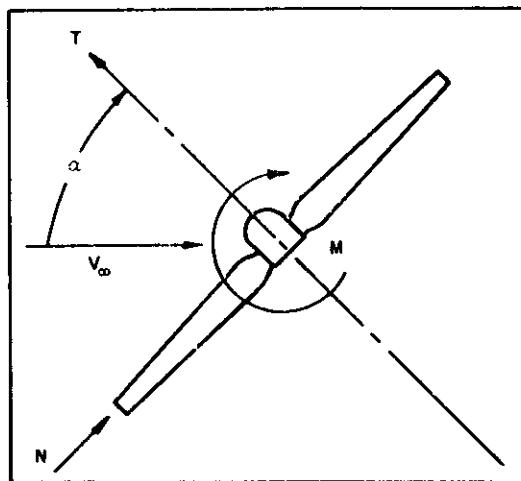


FIGURE 9.1-4 CONVENTIONS USED TO DEFINE POSITIVE SENSE OF FORCES AND MOMENTS

9.1.1 PROPELLER THRUST VARIATION WITH ANGLE OF ATTACK

Two methods are presented in this Section for estimating the thrust of a propeller at high angles of incidence. The first method is that of reference 1 and provides thrust relative to the zero-incidence value. This ratio is approximately proportional to the square of the tangent of the angle of incidence with a constant advance ratio, determined from the velocity normal to the propeller disk. In the theory the thrust is represented by the phase-angle change of the resultant velocity at the blade and takes into account both the angle-of-attack changes and the dynamic-pressure changes. A 90-degree incidence level is formulated from helicopter theory to provide a relatively small correction to the propeller theory. This thrust ratio is dependent on blade angle and advance ratio but, except for a small dependence on solidity, is independent of propeller geometry.

In the absence of complete data on a particular propeller, a second method is given that can be used to approximate the thrust at large incidence angles from experimental data at small incidence angles. This approach is formulated in reference 2, wherein it is demonstrated that certain VTOL transition programs can lie within the region of linear slope of the propeller forces and moments.

The methods presented herein are for an isolated propeller where the thrust-axis angle of attack is the angle between the free-stream velocity and the propeller thrust axis. For airplane installations this angle is often affected by flow induced by the wing, fuselage, and other propellers; however, the results of references 3 and 4 indicate that the major effects of induced flow on propeller thrust occur under conditions that are not likely to be of practical interest (high forward speed at high angles of attack).

DATCOM METHODS

Method 1

The variation of propeller thrust with angle of attack is given relative to the value at zero angle of attack, provided equal advance ratios exist as determined from the velocity normal to the propeller disk. This thrust ratio is given in reference 1 as

$$\frac{C_T(\alpha, J')}{C_T(0, J')} = 1 + \frac{3 \left(\frac{J'}{J_{OT}} \right)^2}{4 \left(1 - \frac{J'}{J_{OT}} \right)} \sin(\beta + \delta) \left[\tan(\beta + \delta) + \sigma_e \left(1 + \sqrt{1 + \frac{2}{\sigma_e} \tan(\beta + \delta)} \right) (1 - \cos \alpha) \right] \tan^2 \alpha \quad 9.1.1-a$$

where all parameters are defined in the general notation list of Section 9.1 and the positive direction of forces and angles is shown in figure 9.1-4.

The procedure to be followed in evaluating equation 9.1.1-a is outlined in the following steps.

Step 1. Determine the propeller effective solidity σ_e by

$$\sigma_e = \frac{b'}{b' \cdot .75} \sigma = \frac{4B\bar{b}'}{3\pi D} \quad 9.1.1-b$$

where

$$\bar{b}' = \frac{1}{0.8} \int_{.2}^1 b' dx', \text{ which may be approximated by}$$

$$\bar{b}' = 0.16 \left(\frac{5}{4} b'_{.25} + 2b'_{.50} + 2b'_{.75} + b'_{.95} \right) \quad 9.1.1-c$$

$b'_{.25}, .50, \dots$ are obtained from the propeller blade planform curve at $\frac{r}{R} = 0.25, 0.50, \dots$

Step 2. The advance ratio at zero-thrust J_{0T} is obtained from figure 9.1.1-7 as a function of β . This functional relationship is given in reference 1 as

$$J_{0T} = 2.2 \tan(\beta + 5) \quad 9.1.1-d$$

Step 3. Using equation 9.1.1-a obtain $\frac{C_T(\alpha, J')}{C_T(0, J')}$ with the σ_e and J_{0T} values obtained in Steps 1 and 2. With this result values of the thrust ratio can be computed for a range of angles of attack and modified advance ratios.

Step 4. Determine the propeller thrust coefficient at selected angles of attack and modified advance ratios by

$$C_T(\alpha, J') = \frac{C_T(\alpha, J')}{C_T(0, J')} C_T(0, J')$$

where $C_T(0, J')$ is the propeller thrust coefficient at zero angle of attack, but with the velocity equal to $V_\infty \cos \alpha$. This parameter will normally be a known quantity.

Figures 9.1.1-8a-g and 9.1.1-11a-d present a comparison of experimental data from reference 2 with the Datcom method as computed from equation 9.1.1-a.

Method 2

This method is suggested in reference 2 for estimating propeller thrust at high angles of attack when experimental data at zero angle of attack are available.

The experimental data of reference 2 show that the thrust coefficient for given values of blade angle and advance ratio is practically constant over a wide angle-of-attack range at low advance ratios, and that this range diminishes with increasing advance ratio. Using these observations, it is possible to identify these ranges in VTOL transition programs.

The boundary of this region, presented in figure 9.1.1-13, has been determined on the basis of five-percent thrust-coefficient increases from the zero-angle-of-attack values for two propellers at a constant blade angle, tested in reference 2. The region varies with blade angle. The boundary curve of figure 9.1.1-13 is defined for a 12-degree blade angle, typical for maximum propeller efficiency in very low-speed flight. The characteristics of the two test propellers are presented in table 9.1.1-A.

As a simple rule of thumb, the propeller thrust at high angles of attack may be assumed to equal the value at zero angle of attack if the modified advance ratio falls below the boundary of figure 9.1.1-13.

A 1-g transition program for a hypothetical airplane described in reference 3 is also shown in figure 9.1.1-13. This program is based on the data obtained for propeller 1 of reference 2. The modified advance ratio lies well below the boundary curve. However, for conditions of steep descent or rapidly decelerating transition the boundary could be exceeded.

Sample Problem

Method 1

Given: The three-bladed propeller designated as propeller number 1 of reference 2. The following example is based on four values of the modified advance ratio over a thrust-axis angle-of-attack range from 0 to 85°.

$$B = 3 \qquad D = 12 \text{ ft} \qquad \beta = 12^\circ$$

r/R	0.25	0.50	0.75	0.95	J'	0.1	0.2	0.4	0.6
b',ft	0.89	1.115	1.175	1.18	C _T (0,J')	0.132	0.121	0.083	0.032

Compute:

Step 1. Determine the effective propeller solidity σ_e .

$$\begin{aligned} \bar{b}' &= 0.16 \left[\frac{5}{4} b'_{.25} + 2b'_{.50} + 2b'_{.75} + b'_{.95} \right] \quad (\text{equation 9.1.1-c}) \\ &= 0.16 \left[\frac{5}{4} (0.89) + (2)(1.115) + (2)(1.175) + 1.18 \right] \\ &= 0.16 (6.87) = 1.10 \end{aligned}$$

$$\sigma_e = \frac{4B\bar{b}'}{3\pi D} = \frac{(4)(3)(1.10)}{(3)(12)\pi} = 0.117 \quad (\text{equation 9.1.1-b})$$

Step 2. Determine the advance ratio at zero-thrust J_{OT} from figure 9.1.1-7 at $\beta = 12^\circ$.

$$J_{OT} = 0.6725$$

Solution:

Determine the ratio of the thrust coefficient at inclination to the thrust coefficient at zero angle of incidence.

$$\begin{aligned} \frac{C_T(\alpha, J')}{C_T(0, J')} &= 1 + \frac{3\left(\frac{J'}{J_{OT}}\right)^2}{4\left(1 - \frac{J'}{J_{OT}}\right)} \sin(\beta + 5) \left[\tan(\beta + 5) \right. \\ &\quad \left. + \sigma_e \left(1 + \sqrt{1 + \frac{2}{\sigma_e} \tan(\beta + 5)} \right) (1 - \cos\alpha) \right] \tan^2\alpha \\ &\hspace{15em} (\text{equation 9.1.1-a}) \\ &= 1 + \frac{3\left(\frac{J'}{0.6725}\right)^2}{4\left(1 - \frac{J'}{0.6725}\right)} \sin(17) \left[\tan(17) \right. \\ &\quad \left. + 0.117 \left(1 + \sqrt{1 + \frac{2}{0.117} \tan(17)} \right) (1 - \cos\alpha) \right] \tan^2\alpha \\ &= 1 + \frac{6.64 J'^2}{4 - 5.95J'} (0.2924) \left[0.3057 + 0.409(1 - \cos\alpha) \right] \tan^2\alpha \\ &= 1 + \frac{1.939J'^2}{4 - 5.95J'} \left[0.3057 + 0.409(1 - \cos\alpha) \right] \tan^2\alpha \end{aligned}$$

Using this result obtain $\frac{C_T(\alpha, J')}{C_T(0, J')}$ as a function of J' and α . This is calculated below for seven angles of attack. Note that at $J' = 0$, $\frac{C_T(\alpha, J')}{C_T(0, J')} = 1.0$; and at

$$J' = J_{OT}, \quad \frac{C_T(\alpha, J')}{C_T(0, J')} \rightarrow \infty$$

				$\frac{C_T(\alpha, J')}{C_T(0, J')} - 1$						
①	②	③	④	$\alpha=85^\circ$	79.5°	75°	67.5°	60°	45°	30°
J'	$4-5.95J'$	$1.999J'^2$	③ / ②	88.68④	18.63④	8.465④	3.252④	1.531④	.4255④	.1206④
.05	3.7025	.0048	.00130	.1152	.0244	.0111	.0042	.0020	.00056	.00016
.10	3.405	.0194	.00570	.505	.1062	.0482	.0185	.0087	.0024	.00069
.15	3.1075	.0436	.01404	1.245	.2619	.1190	.0456	.0215	.0060	.0017
.20	2.810	.0776	.02760	2.447	.5142	.2336	.0898	.0423	.0117	.0033
.30	2.215	.1745	.07879	6.987	1.468	.6669	.2562	.1206	.0335	.0095
.40	1.620	.3102	.1915	16.983	3.568	1.621	.6228	.2931	.0815	.0231
.50	1.025	.4848	.4729	41.934	8.811	4.003	1.538	.7239	.2012	.0570
.60	0.430	.6980	1.6233	143.95	30.24	13.740	5.279	2.485	.6907	.1958
.65	0.1325	.8192	6.1829	548.30	115.19	52.340	20.107	9.464	2.631	.7457

The calculated values of the thrust ratio are compared with the experimental results from reference 1 in figure 9.1.1-14.

The thrust coefficient at angle of inclination and given advance ratio is then

$$C_T(\alpha, J') = C_T(0, J') \frac{C_T(\alpha, J')}{C_T(0, J')}$$

$C_T(\alpha, J')$				
α	$J'=.1$	$J'=.2$	$J'=.4$	$J'=.6$
0	0.132	0.121	0.083	0.032
30	0.1321	0.1214	0.0849	0.0383
45	0.1323	0.1224	0.0898	0.0541
60	0.1331	0.1261	0.1073	0.1115
67.5	0.1344	0.1319	0.1347	0.2009
75	0.1384	0.1493	0.2175	0.4717
79.5	0.1462	0.1832	0.3791	0.9997
85	0.1987	0.4171	1.4926	4.6384

The calculated values of the thrust coefficients are compared with the experimental results from reference 1 in figure 9.1.1-15. The results may be converted to thrust in pounds by

$$-T(\alpha, J') = \frac{8}{\pi(J')^2} C_T(\alpha, J') \rho_{\infty} S_p$$

REFERENCES

1. DeYoung, J.: Force and Moment Derivatives Due to Propellers of Arbitrary Configuration Inclined with Respect to Free Stream. AIAA Preprint No. 64-169, 1964. (U)
2. Yaggy, P. F., and Rogallo, V. L.: A Wind-Tunnel Investigation of Three Propeller Through an Angle-of-Attack Range From 0° to 85°. NASA TN D-318, 1960. (U)
3. Draper, J. W., and Kuhn, R. E.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack. NACA TN 3304, 1957. (U)
4. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Longitudinal Aerodynamics of Three Propeller-Driven VTOL Configurations in the Transition Speed Range, Including Effects of Ground Proximity. NASA TN D-55, 1960. (U)

TABLE 9.1.1-A
Reference 2

Propeller	No. 1 Curtiss C6345-C500	No. 2 Curtiss C6345-C300
Diameter	12.0 ft	10.0 ft
No. of blades	3	3
Airfoil section	NACA 16 series	NACA 64 series
Blade designation	858-7C4-36	X100188
Activity factor/blade	150	188
Solidity	0.124	0.183

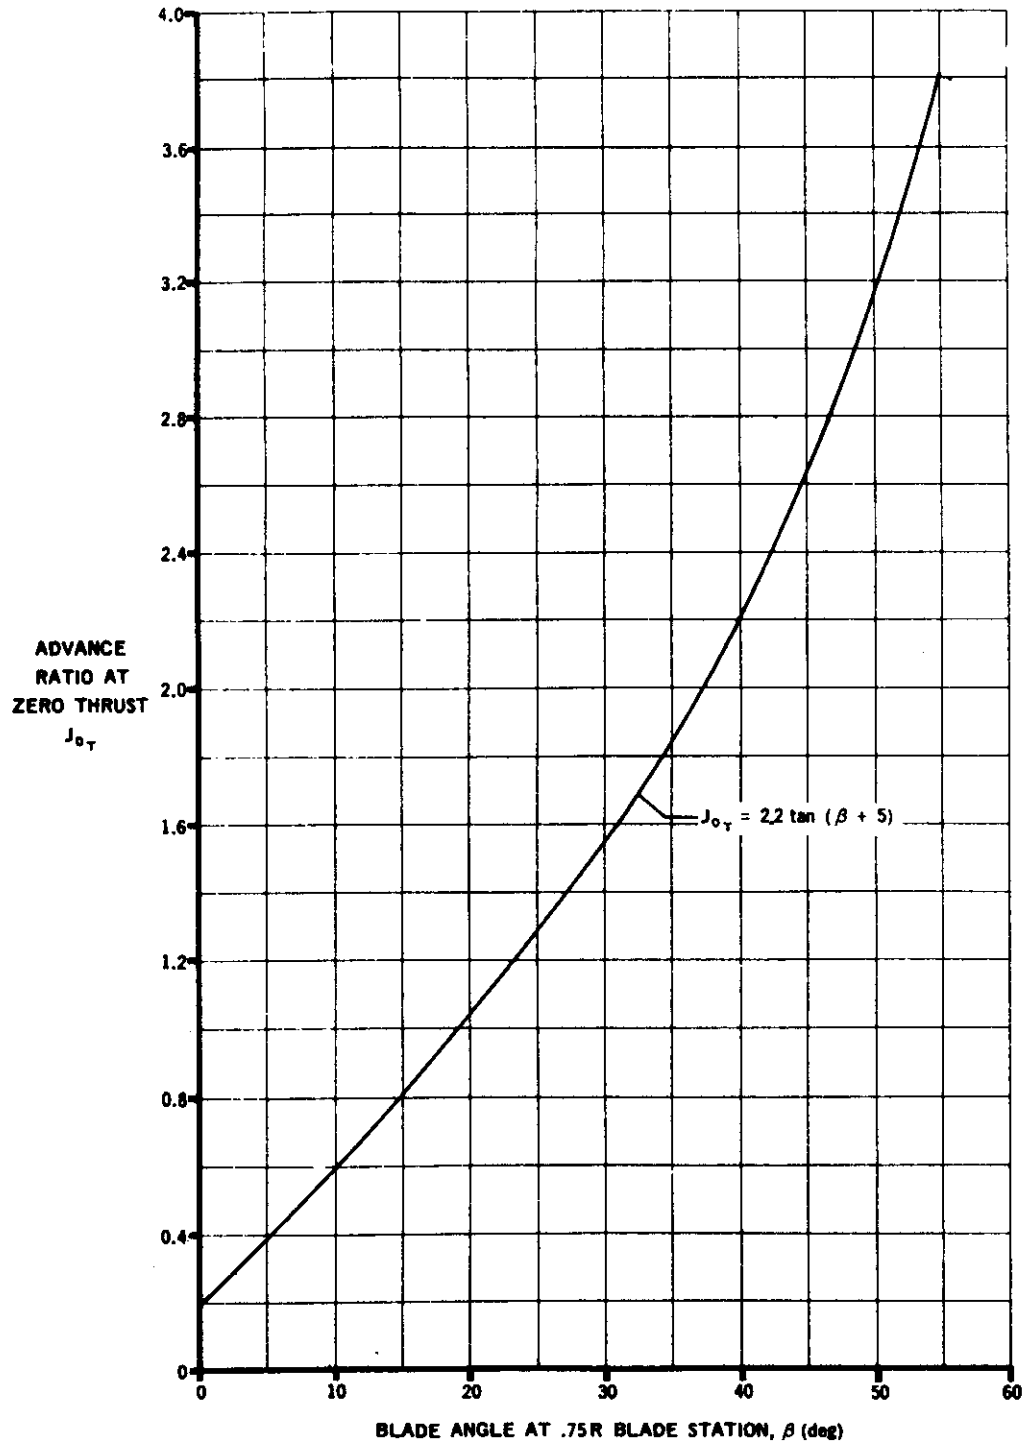


FIGURE 9.1.1-7 ADVANCE RATIO AT ZERO THRUST

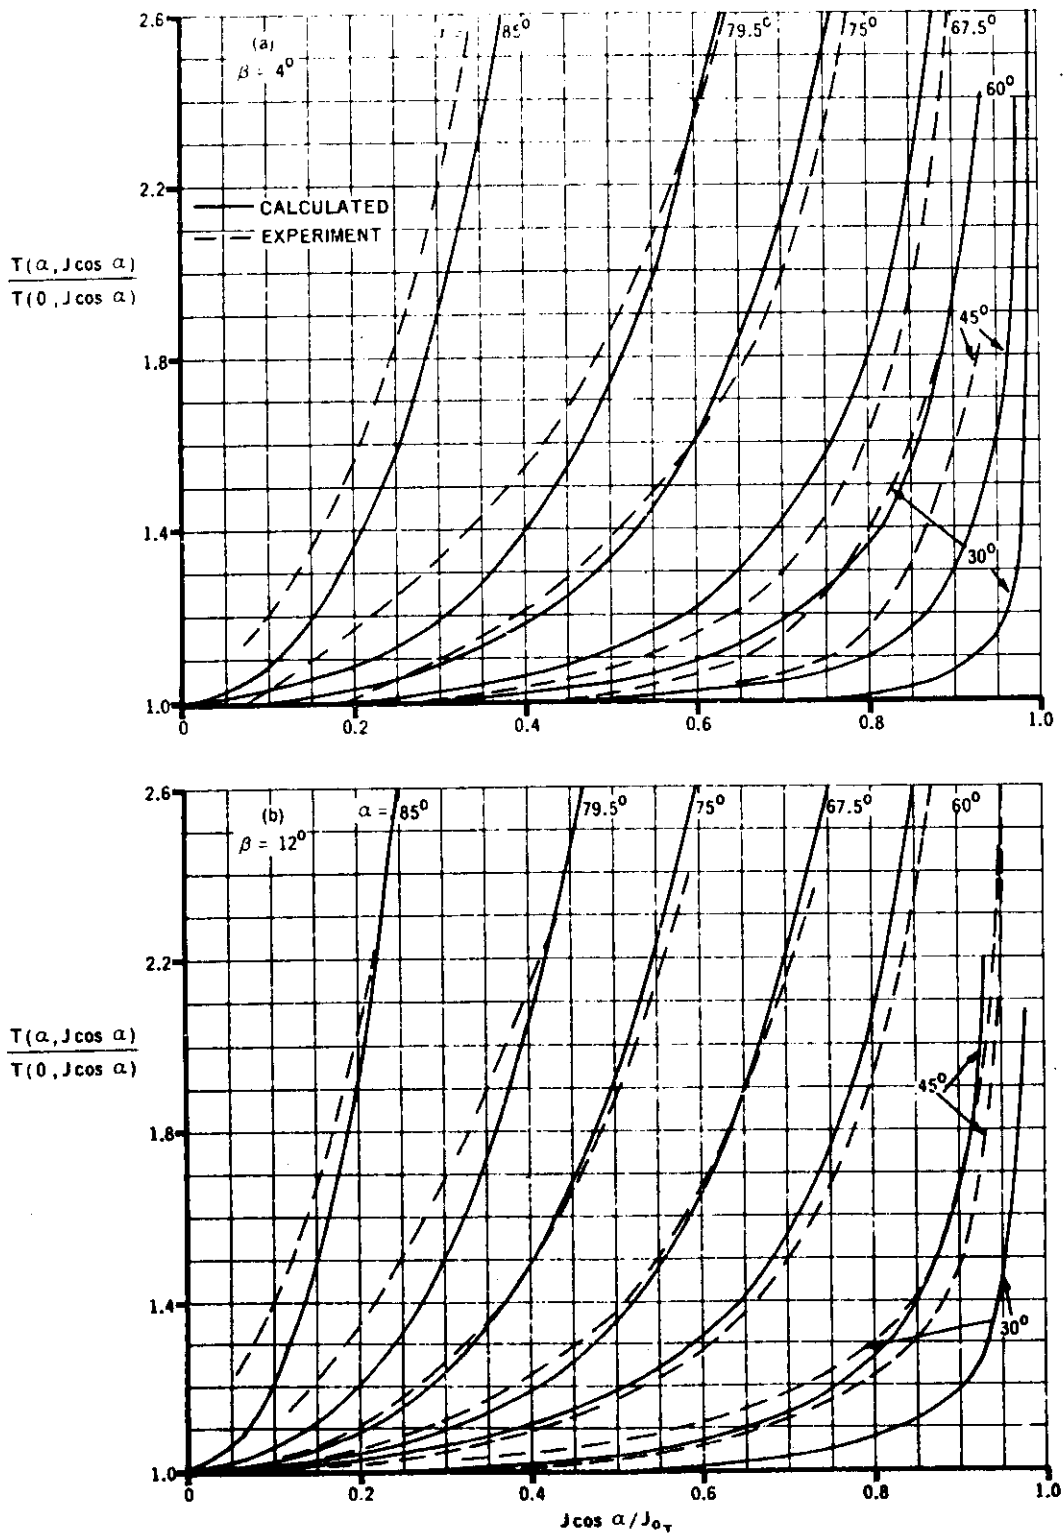


FIGURE 9.1.1-8 COMPARISON OF CALCULATED AND EXPERIMENTAL RATIOS OF THRUST AT PROPELLER THRUST-AXIS ANGLE OF ATTACK TO THRUST AT ZERO THRUST-AXIS ANGLE OF ATTACK FOR PROPELLER 1 OF REFERENCE 2

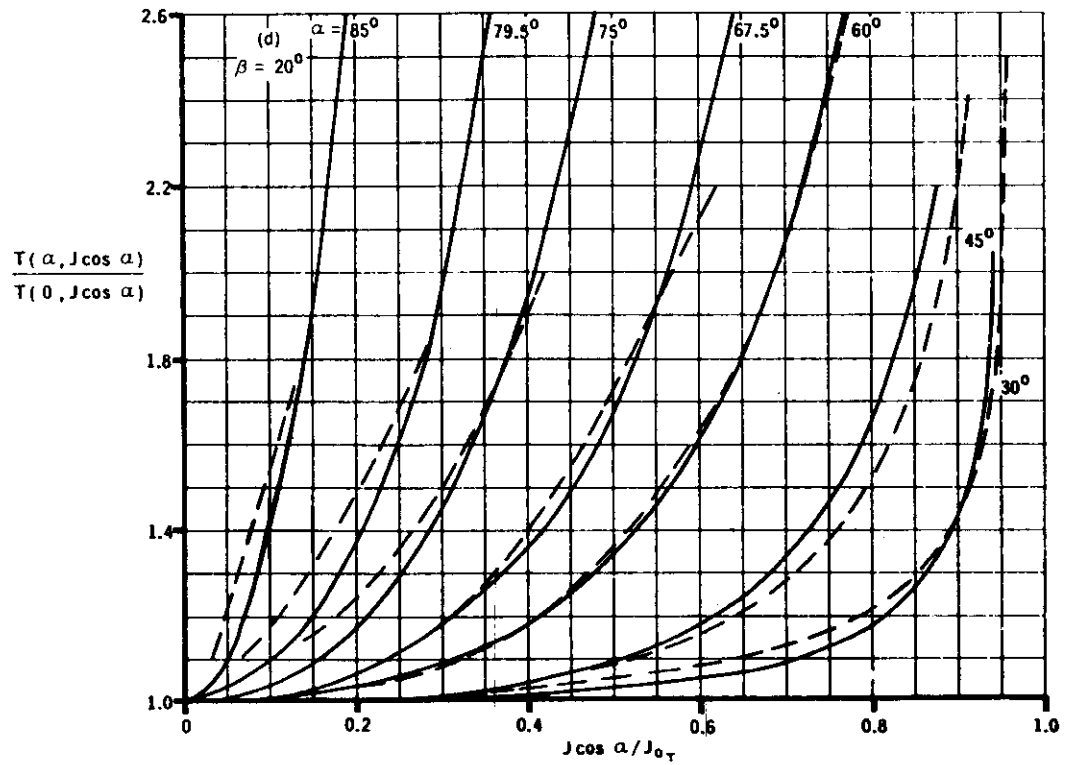
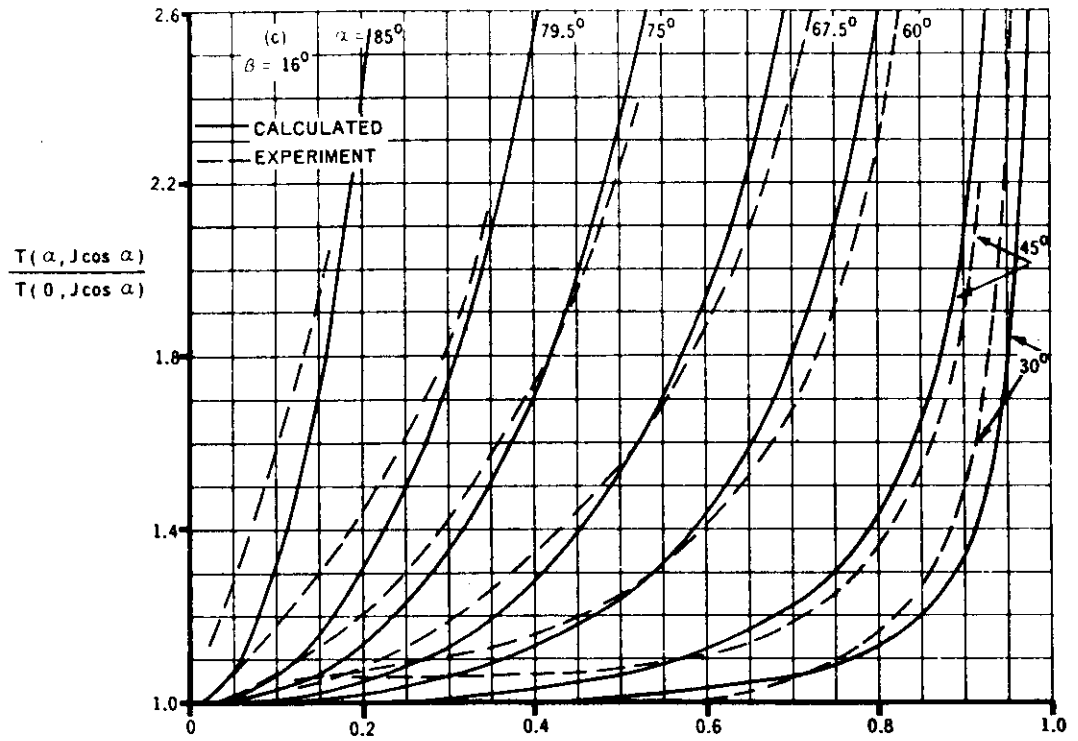


FIGURE 9.1.1-8 (CONTD)

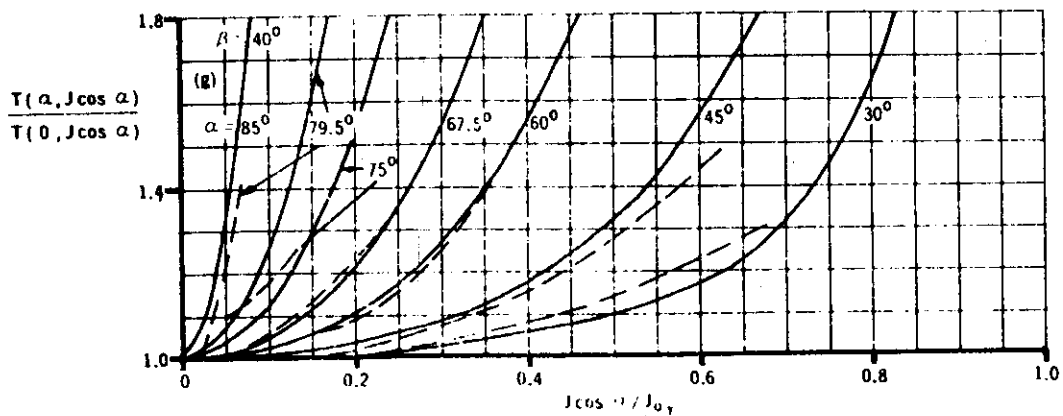
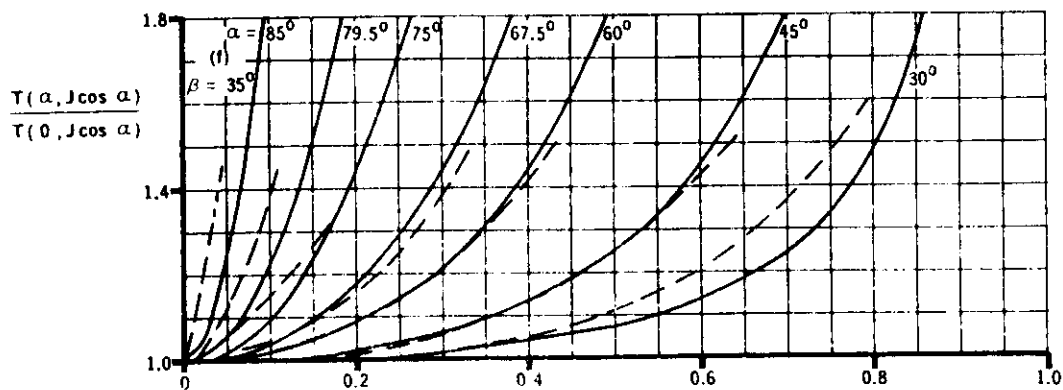
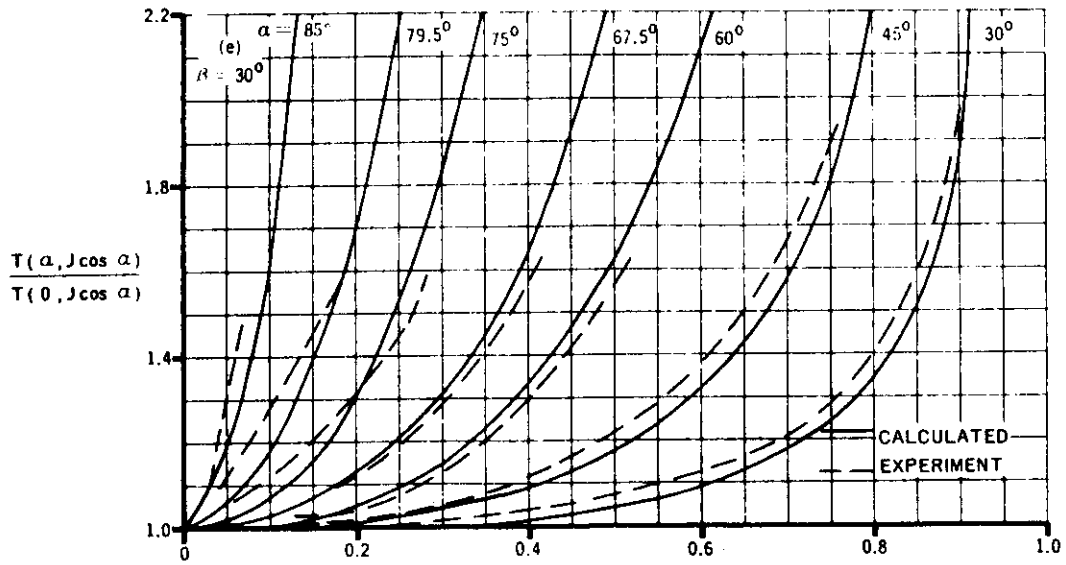


FIGURE 9.1.1-8 (CONTD)

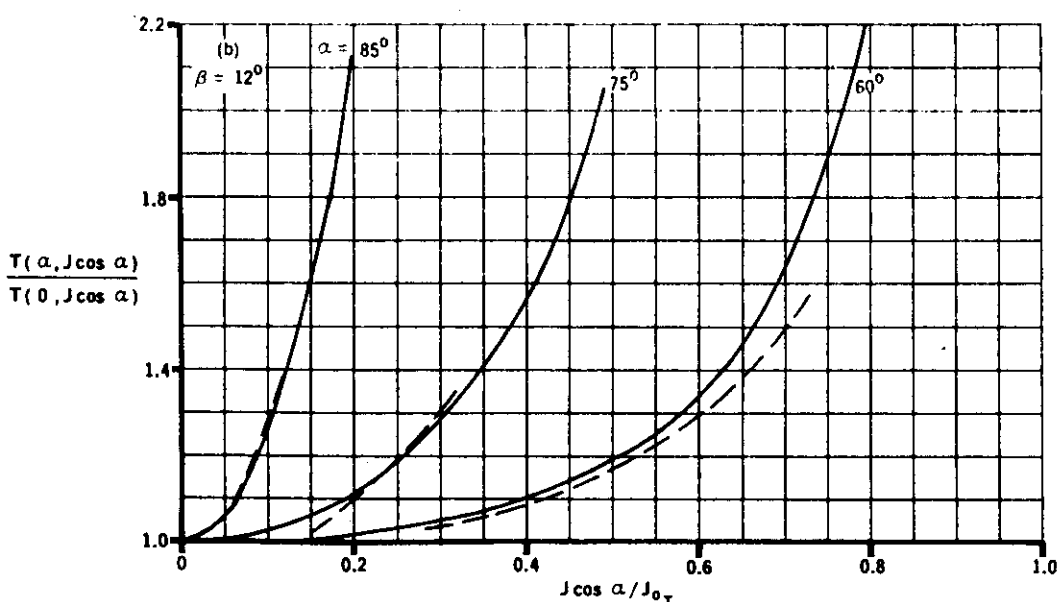
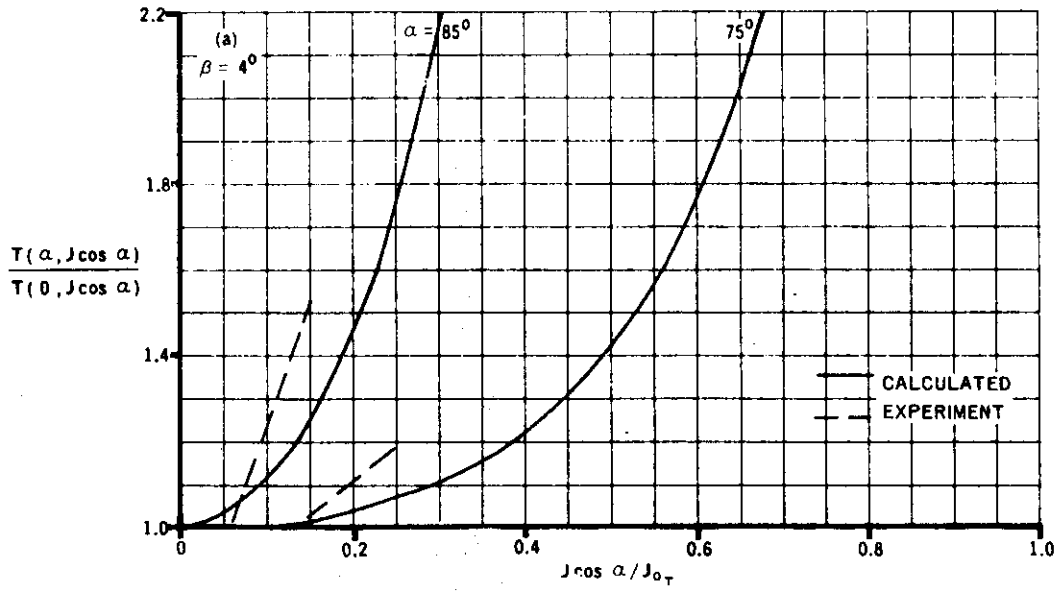


FIGURE 9.1.1-11 COMPARISON OF CALCULATED AND EXPERIMENTAL RATIOS OF THRUST AT PROPELLER THRUST-AXIS ANGLE OF ATTACK TO THRUST AT ZERO THRUST-AXIS ANGLE OF ATTACK FOR PROPELLER 2 OF REFERENCE 2

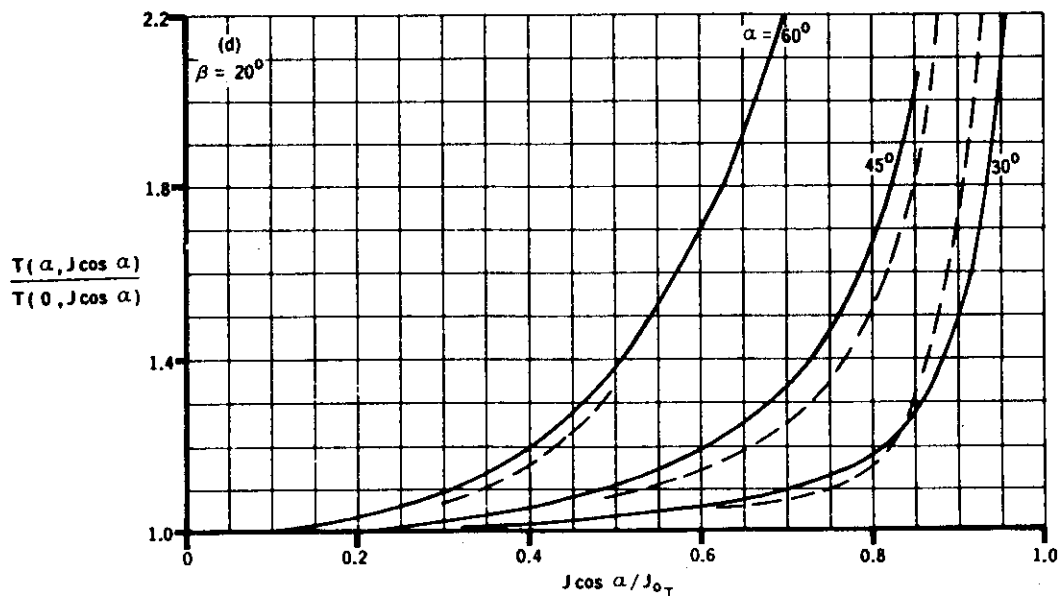
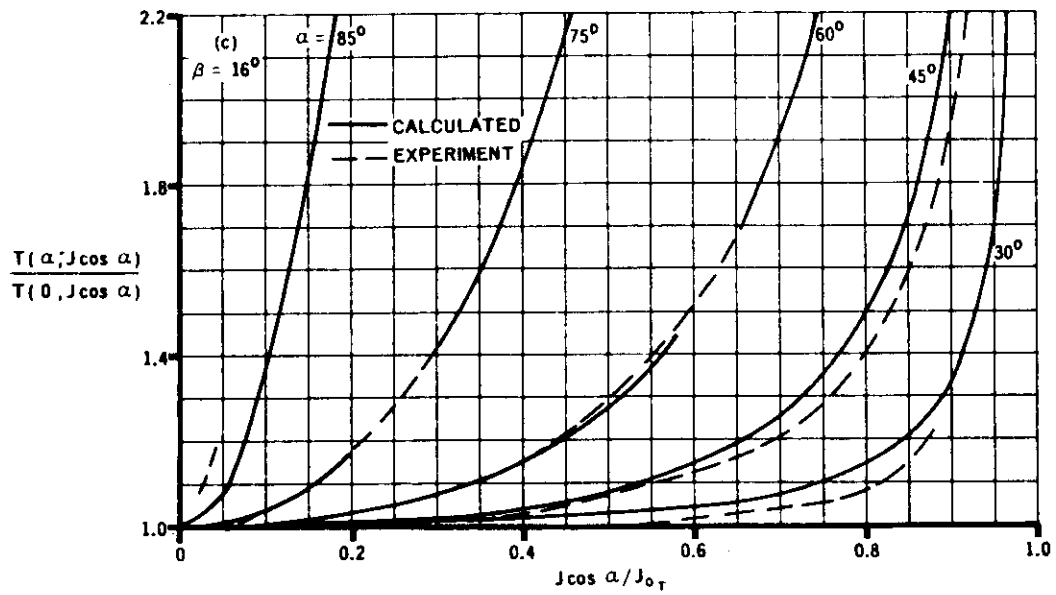


FIGURE 9.1.1-11 (CONTD)

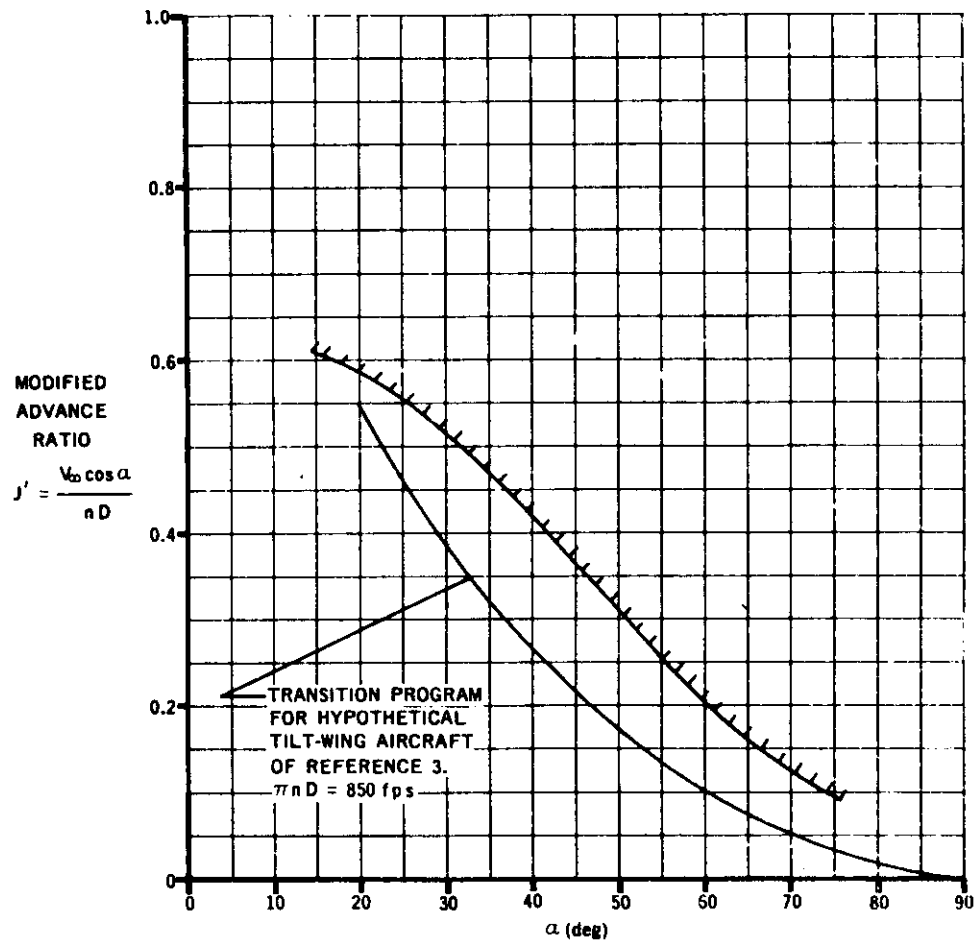


FIGURE 9.1.1-13 BOUNDARY CURVE FOR 5-PERCENT INCREASE OF COEFFICIENT OVER VALUE AT ZERO THRUST-AXIS ANGLE OF ATTACK

——— CALCULATED
 - - - EXPERIMENTAL
 PROPELLER 1, REFERENCE 2

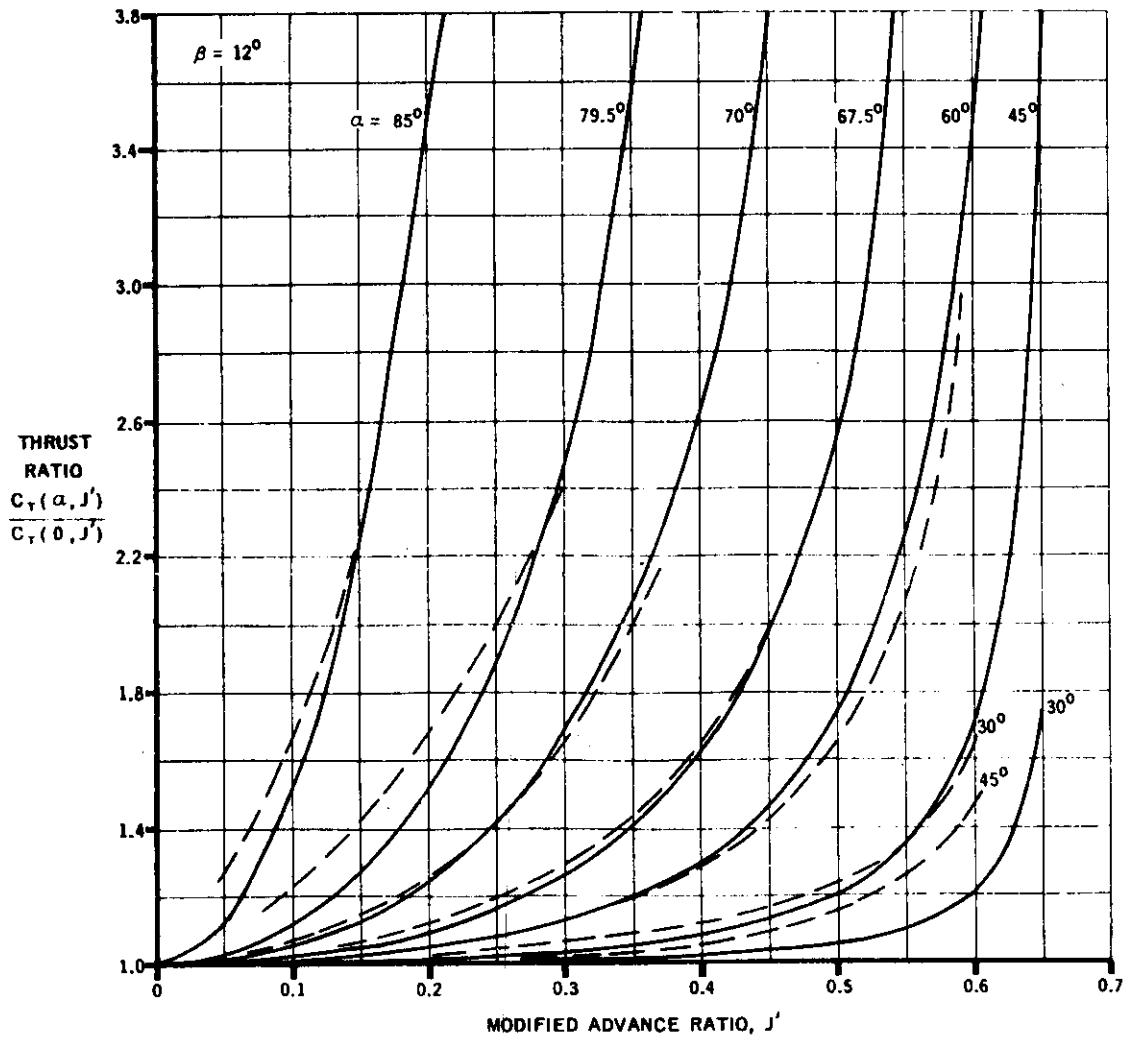


FIGURE 9.1.1-14 DATCOM METHOD 1 SAMPLE PROBLEM RESULTS

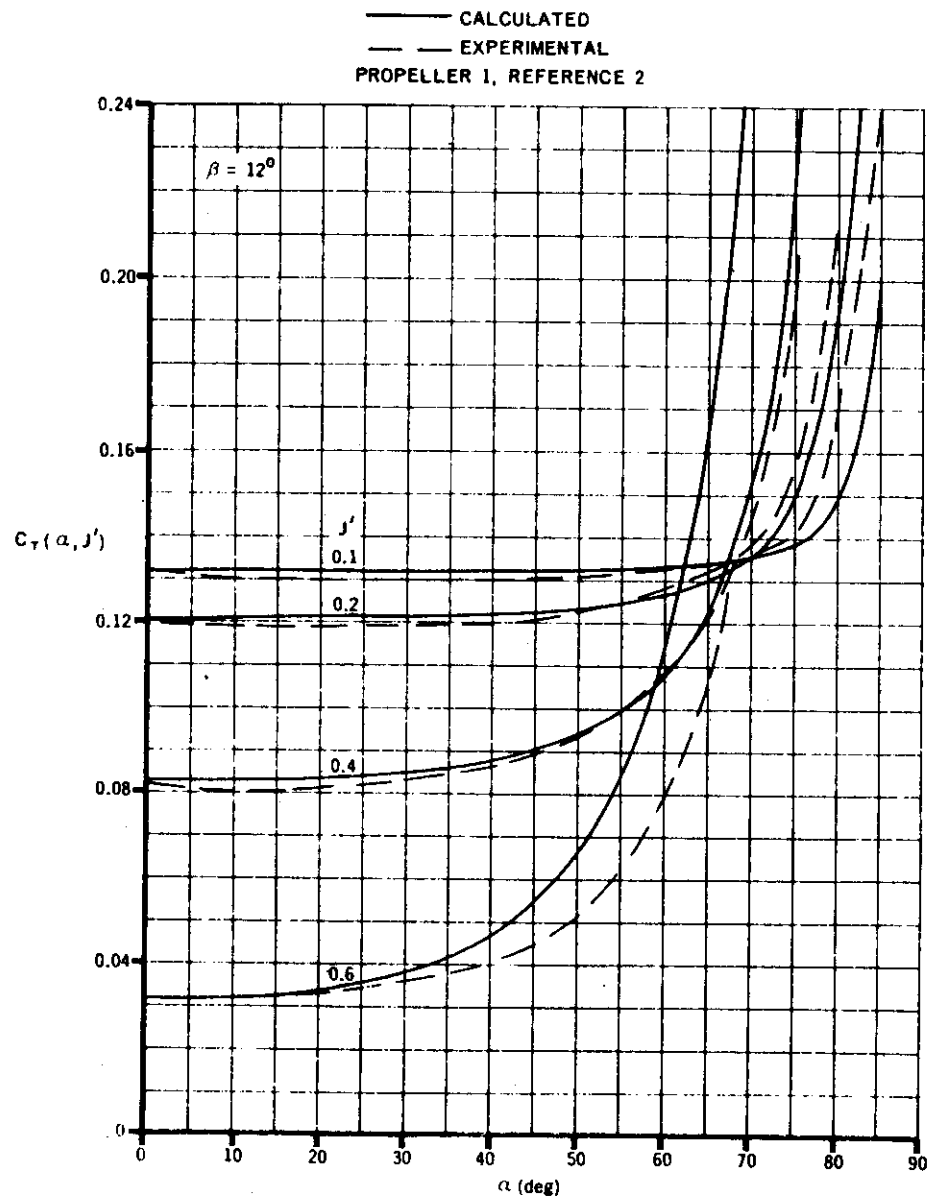


FIGURE 9.1.1-15 DATCOM METHOD 1 SAMPLE PROBLEM RESULTS

9.1.2 PROPELLER PITCHING-MOMENT VARIATION WITH POWER AND ANGLE OF ATTACK

At the present there are no theoretical or semi-empirical methods available in the literature for the prediction of propeller pitching moments at high angles of attack. The method presented herein is empirical and requires experimental data at two moderate angles of attack.

Experimental data indicate that there is an appreciable direct pitching moment on the propeller during operation at angle of attack. This pitching moment may be regarded as being due to the fact that the center of thrust is some distance away from the center of rotation. Figures 9.1.2-3 and 9.1.2-4 show the direct propeller pitching moment expressed as an effective thrust-axis shift for the propeller and the propeller-wing combination of reference 1 and for propeller 1 of reference 2, respectively. These data indicate an increase in propeller pitching moment with increasing angle of attack and a more pronounced shift of the effective thrust axis at the lower thrust coefficients. The data of figure 9.1.2-3 further show that the propeller pitching moment was approximately doubled when the propeller was operated in the presence of the wing because of the upwash induced by the wing.

The Datcom method which follows is based on observations of the large body of test data presented in reference 2.

DATCOM METHOD

This method is suggested in reference 2 for estimating propeller pitching moment at high thrust-axis angles of attack when experimental data are available at two angles of attack, such as zero and 15 degrees.

The experimental data of reference 2 show that the propeller pitching moment for given values of blade angle and advance ratio have nearly a constant slope over wide angle-of-attack ranges at low advance ratio and that the width of these ranges diminishes with increasing advance ratio.

It is not possible to define the limits of the regions of linearity of propeller pitching moments from the experimental data as was done for the propeller thrust in Section 9.1.1. However, in view of the fact that the angle-of-attack ranges of pitching-moment linearity are essentially those over which the thrust is constant, it is assumed that, to a first approximation, the boundary, defined in figure 9.1.1-13, also applies to pitching moments. As noted in Section 9.1.1, this boundary varies with blade angle. It is defined for a blade angle typical of maximum propeller efficiency in very low-speed flight.

As a simple rule of thumb, the propeller pitching moment at high angles of attack may be obtained with accuracy acceptable for preliminary design analysis by a linear extrapolation of experimental data at moderate angles of attack, provided the modified advance ratio falls below the boundary of figure 9.1.1-13.

REFERENCES

1. Draper, J. W., and Kuhn, R. E.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack Up to 90° . NACA TN 3304, 1954. (U)
2. Yaggy, P. F., and Rogallo, V. L.: A Wind-Tunnel Investigation of Three Propellers Through an Angle-of-Attack Range From 0° to 85° . NASA TN D-318, 1960. (U)
3. McLemore, H. C., and Cannon, M. D.: Aerodynamic Investigation of a Four-Blade Propeller Operating Through an Angle-of-Attack Range From 0° to 180° . NACA TN 3228, 1954. (U)

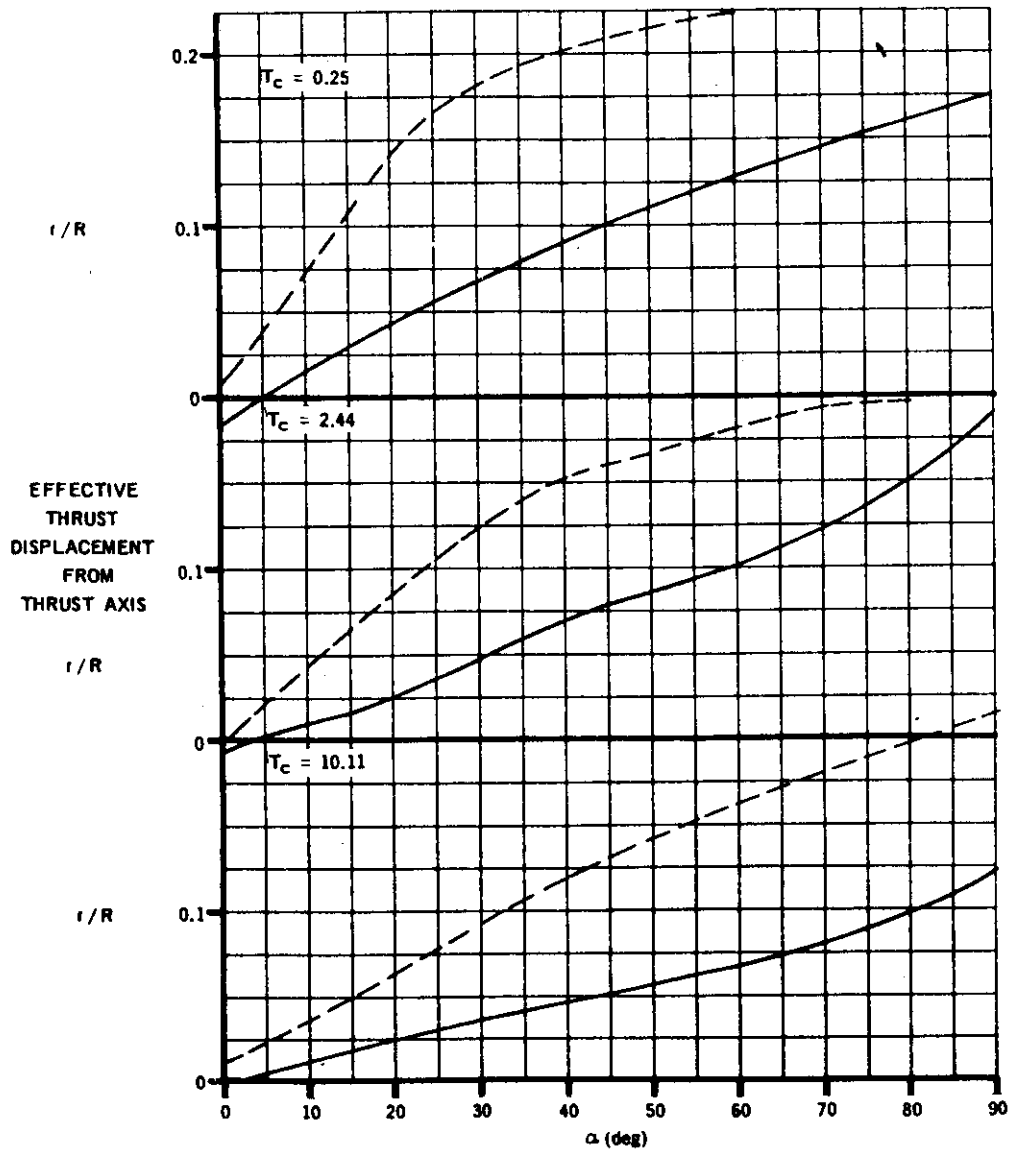
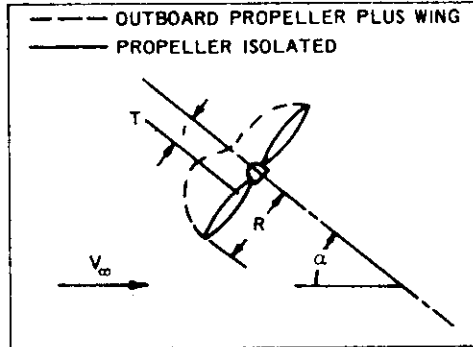


FIGURE 9.1.2-3 EFFECT OF ANGLE OF ATTACK ON EFFECTIVE THRUST DISPLACEMENT FROM THRUST AXIS FOR THE PROPELLER OF REFERENCE 1

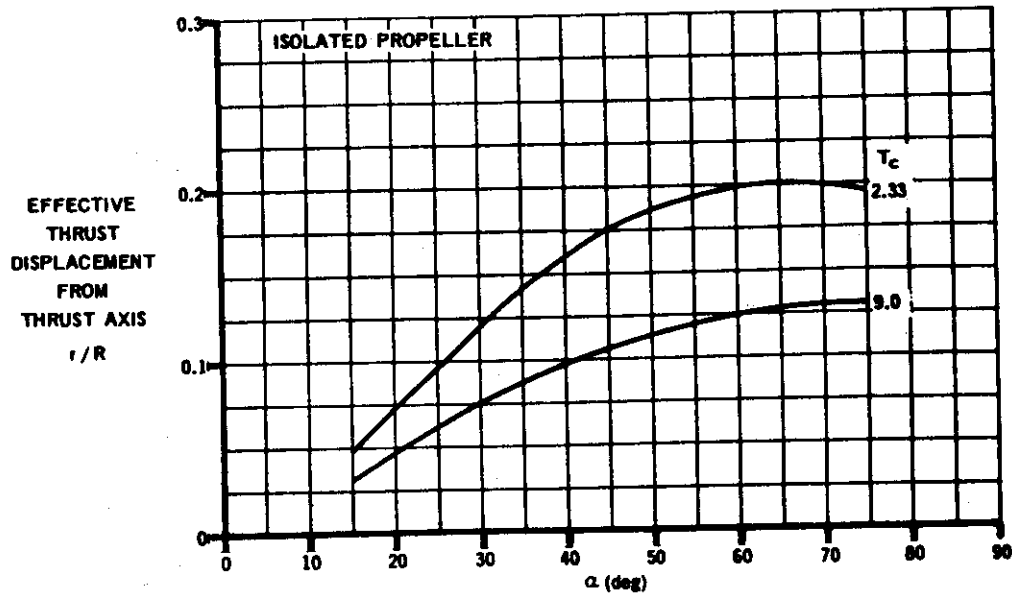
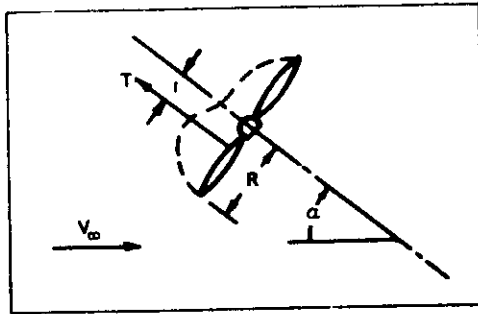


FIGURE 9.1.2-4 EFFECT OF ANGLE OF ATTACK ON EFFECTIVE THRUST DISPLACEMENT FROM THRUST AXIS FOR PROPELLER 1 OF REFERENCE 2

9.1.3 PROPELLER NORMAL-FORCE VARIATION WITH POWER AND ANGLE OF ATTACK

Two methods are presented in this Section for estimating the propeller normal force at high angles of attack .

The first method, developed by DeYoung in reference 1, provides the normal-force coefficient at high angles of attack relative to the linear relation $\left(\frac{dC_N}{d\alpha}\right)_{\alpha=0}$

This ratio is equal to the tangent of the angle of attack, provided equal advance ratios, as determined from the velocity normal to the propeller disk, exist. In theory, the normal force is considered to be proportional to the torque difference due to angle of incidence between the down-going blade and the up-going blade.

The essential part of Datcom method 1 is the estimation of $\left(\frac{dC_N}{d\alpha}\right)_{\alpha=0}$. This involves determining the normal-force derivative with respect to the local angle of attack, the local angle-of-attack gradient, and a correction for phase-angle shift.

DeYoung, in reference 1, has obtained a simple relationship for the normal-force derivative with respect to local angle of attack in the manner described in Section 9.1. A general expression for this derivative as a function of propeller geometry and operating parameters is obtained from the analysis of Ribner in references 2 and 3 and the assumption of a blade section lift-curve slope of $c_{l\alpha} = 0.95(2\pi)$ per radian.

The constants of the resulting expression are evaluated by statistical means from the computed data of the given blade shapes of reference 4.

The normal-force derivative with respect to wing angle of attack is given as the product of the normal-force derivative with respect to the local propeller angle of attack and the local angle-of-attack gradient $\frac{d\alpha_{in}}{d\alpha}$, obtained in reference 1 by an analysis of the upwash due to the wing, fuselage, and other propellers.

Propellers operating at high angles of attack experience appreciable angle-of-attack variation on the blades. Lift increases and decreases in a harmonic fashion. As the angle of attack is increased, circulation increases, and a starting vortex is shed which induces a downwash and changes the buildup of circulation. This unsteady motion causes the lift cycle to be out of phase with the angle-of-attack cycle; consequently, the propeller forces and moments have components in both the lateral and vertical directions. The normal force at incidence is then the product of the normal force computed for zero phase angle and the cosine of the phase angle. In Datcom method 1 the effect of this phase-angle shift is applied to the computed linear relation

$$\left(\frac{dC_N}{d\alpha}\right)_{\alpha=0}$$

In the theory of reference 1 the propeller phase angle is approximated by an analogous wing unsteady solution, assuming that the propeller forces and blade angle of attack are analogous to those of a wing that is harmonically pitching about its quarter-chord line.

A second method is given which, in the absence of complete data on a particular propeller, can be used to approximate the normal force at large angles of attack from experimental data at small angles of attack. This approach is formulated in reference 5, wherein it is demonstrated that certain VTOL transition programs can lie within the region of linear slope of the propeller forces and moments.

DATCOM METHODS

Method 1

The variation of propeller normal force with angle of attack is given relative to $\left(\frac{dC_N}{d\alpha}\right)_{\alpha=0}$, provided equal advance ratios, as determined from the velocity normal to the propeller disk, exist. This ratio is given in reference 1 as

$$\frac{C_N(\alpha, J')}{C_{N\alpha}(0, J')} = \tan \alpha \quad 9.1.3-a$$

The positive normal-force and angle-of-attack senses are shown in figure 9.1-4, and the required parameters are defined in the general notation list of Section 9.1.

This method is essentially one of determining the denominator values in the form of $C_{N\alpha}'$ where

$$C_{N\alpha}' = C_{N\alpha_{in}}' \frac{d\alpha_{in}}{d\alpha} \text{ per rad} \quad 9.1.3-b$$

In computing these values the J or thrust in the relation for $C_{N\alpha_{in}}'$ must be taken at J' and velocity at $V_{\infty} \cos \alpha$.

The derivatives $C_{N\alpha}'$ and $C_{N\alpha}$ are related by

$$C_{N\alpha}(0, J') = \frac{\pi}{8} (J')^2 C_{N\alpha_{in}}'(0, J') \text{ per rad} \quad 9.1.3-c$$

The procedure to be followed in evaluating the normal force is outlined in the following steps.

Step 1. Determine at zero phase angle the propeller normal-force derivative with respect to the local angle of attack at the propeller disk by

$$C_{N\alpha_{in}}' = \frac{4.25 \sigma_e}{1 + 2 \sigma_e} \sin(\beta + 8) \left(1 + \frac{3T_c}{8\sqrt{1 + (2/3)T_c}} \right) \text{ per rad} \quad 9.1.3-d$$

for single-rotation propellers, and by

$$C_{N\alpha_{in}}' = \frac{3.86 \sigma_e}{1 + \sigma_e} \sin(\beta + 14) \left(1 + \frac{3T_c}{8\sqrt{1 + (2/3)T_c}} \right) \text{ per rad} \quad 9.1.3-d'$$

for counter-rotating propellers;

where σ_e is obtained as outlined in Step 1 of Datcom method 1 of Section 9.1.1 and the thrust values are taken at J' , with velocity equal to $V_{\infty} \cos \alpha$. The thrust values will normally be known.

Step 2. Determine the local angle-of-attack gradient $\frac{d\alpha_{in}}{d\alpha}$ by

$$\frac{d\alpha_{in}}{d\alpha} = \frac{1 + \frac{2A}{9(A+10)} \left(\frac{1}{\frac{x_L .75}{c_r} + \frac{1}{10}} + \frac{1}{\frac{x_R .75}{c_r} + \frac{1}{10}} \right) + \frac{1}{2} \left[\left(\frac{R_{fus}}{y_L .75} \right)^2 + \left(\frac{R_{fus}}{y_R .75} \right)^2 \right]}{1 - \frac{1}{4} \sum_{\text{props}} \left[\left(\frac{R}{\Delta y_L .75} \right)^2 + \left(\frac{R}{\Delta y_R .75} \right)^2 \right] \frac{d\epsilon_z \text{ slip}}{d\alpha_{in}}} \quad 9.1.3-e$$

where the first two terms in the numerator are the average upwash at the propeller .75R station due to the wing, and the third term in the numerator is the average upwash at the propeller .75R station due to the fuselage.

The summation term in the denominator is the average downwash in the propeller slipstream at the propeller .75R station. For propellers operating near each other this downwash must be considered in predicting the local angle-of-attack gradient. This downwash may be neglected if a fuselage separates the propellers or if adjacent propellers are sufficiently far apart so that $\Delta y > 2R$. The slipstream gradient is given by

$$\frac{d\epsilon_z \text{ slip}}{d\alpha_{in}} = \frac{T_c}{4 + \frac{8}{7} T_c} + \frac{\left(C_{N_{\alpha_{in}}} \right)_{T_c=0} \sqrt{1 + 1.3 T_c}}{4 + 2T_c} \quad 9.1.3-f$$

Step 3. Determine the propeller normal-force derivative with respect to wing angle of attack at zero phase angle using the terms obtained in Steps 1 and 2 and equation 9.1.3-b

$$C_{N_{\alpha}}' = C_{N_{\alpha_{in}}} \frac{d\alpha_{in}}{d\alpha} \text{ per rad}$$

Step 4. Correct the $C_{N_{\alpha}}'$ value obtained for zero phase angle (Step 3) for phase-angle shift by

$$C_{N_{\alpha}}'(\delta) = C_{N_{\alpha}}' \cos \delta_f \text{ per rad} \quad 9.1.3-g$$

The phase angle is determined by

$$\delta_f = 0.825 \tan^{-1} \frac{15 \sigma_e}{B \sqrt{2 J_{Op} J' - (J')^2}} \quad 9.1.3-h$$

where

$$J_{Op} = J_{OT} + \frac{16}{\sin(\beta + 5) \cos^4(\beta + 5)} \left(\frac{\sigma_e}{B} \right)^2 \quad 9.1.3-i$$

and J_{OT} is obtained as a function of β from Figure 9.1.1-7.

Step 5. Convert the $C_{N\alpha}'$ results of Step 4 to $C_{N\alpha}$ using equation 9.1.3-c.

$$C_{N\alpha}(0, J') = \frac{\pi}{8} (J')^2 C_{N\alpha}'(0, J') \text{ per rad}$$

Step 6. Determine the normal force at selected wing angles of attack and modified advance ratios using

$$C_N(\alpha, J') = C_{N\alpha}(0, J') \tan \alpha$$

A comparison of normal-force derivative at zero thrust, computed using equations 9.1.3-d and 9.1.3-d', with the theory of reference 4 is presented in Table 9.1.3-A. The percentage difference shown has been taken with respect to the values of reference 4. The comparison includes data with two blade shapes and wide variations of solidity, blade pitch angles, and number of blades. The percentage difference is considered to be within the accuracy of detailed propeller theory.

The normal-force ratio given by equation 9.1.3-a is compared with experimental data from reference 5 in figure 9.1.3-14.


Method 2

This method is suggested in reference 5 for estimating the propeller normal force at high angles of attack when experimental data are available at two angles of attack, such as zero and 15 degrees. This is an empirical method based on observations of a large body of test data in reference 5. The method is analogous to the method of Section 9.1.2 for estimating propeller pitching moments and provides acceptable accuracy for preliminary-design analysis. The method merely states that the propeller normal force at high angles of attack may be obtained by linear extrapolation of experimental data, provided the modified advance ratio falls below the boundary of figure 9.1.1-13.

Sample Problem

Method 1

Given: The hypothetical four-propeller, tilt-wing airplane of reference 6 with linear dimensions six times those of the model. The propellers are those designated as propeller 1 of reference 5. The following example is computed for four values of the modified advance ratio over an angle-of-attack range from 0 to 80 degrees.

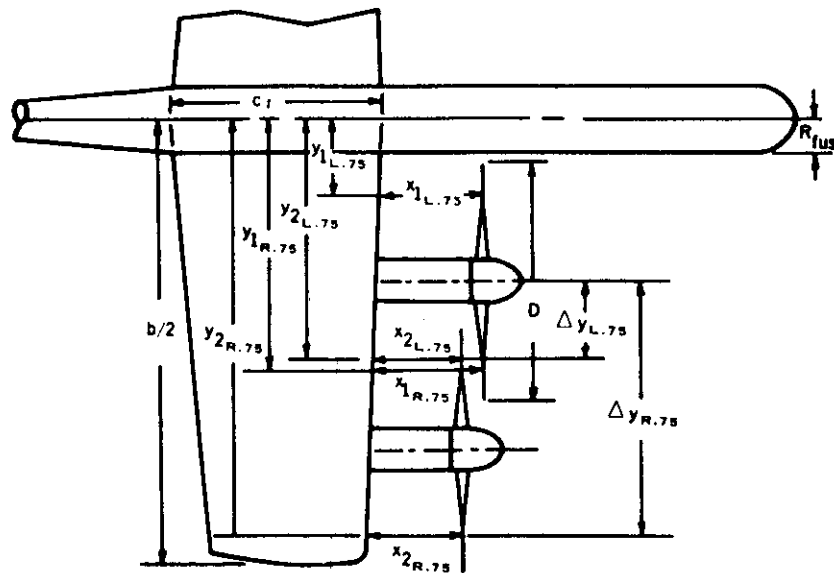

Propeller Characteristics

The propellers are the same as those of the sample problem of Section 9.1.1.

$B = 3$ $D = 12 \text{ ft}$ $\beta = 12^\circ$ $\sigma_e = 0.117$ $J_{OT} = 0.6725$

J'	0.1	0.2	0.4	0.6
$T_c(0, J')$	33.61	7.703	1.321	0.2267

These $T_c(0, J')$ values have been obtained from the $C_T(0, J')$ values given in the sample problem of Section 9.1.1 by

$$T_c(0, J') = \frac{8}{\pi (J')^2} C_T(0, J')$$

Airplane Characteristics

$$c_r = 10.0 \text{ ft} \quad A = 4.89 \quad R_{fus} = 1.25 \text{ ft}$$

Propeller 1 (Inboard)

Propeller 2 (Outboard)

$$\begin{aligned} x_{L.75} &= 5.25 \text{ ft} & y_{L.75} &= 3.25 \text{ ft} & x_{L.75} &= 4.50 \text{ ft} & y_{L.75} &= 11.75 \text{ ft} \\ x_{R.75} &= 5.60 \text{ ft} & y_{R.75} &= 12.25 \text{ ft} & x_{R.75} &= 4.80 \text{ ft} & y_{R.75} &= 20.75 \text{ ft} \end{aligned}$$

$$\Delta y_{L.75} = 4.0 \text{ ft}$$

$$\Delta y_{R.75} = 13.0 \text{ ft}$$

Compute:

Step 1. Determine the propeller normal-force derivatives at zero phase angle with respect to the local angle of attack at the propeller disk $C_N'_{\alpha_{in}}$

$$C_N'_{\alpha_{in}} = \frac{4.25 \sigma_e}{1 + 2 \sigma_e} \sin(\beta + 8) \left(1 + \frac{3T_c}{8\sqrt{1 + (2/3)T_c}} \right) \text{ per rad}$$

(equation 9.1.3-d)

$$= \frac{(4.25)(0.117)}{1 + 2(0.117)} \sin(12 + 8) \left(1 + \frac{3T_c}{8\sqrt{1 + (2/3)T_c}} \right)$$

$$= 0.138 + \frac{0.0517T_c}{\sqrt{1 + (2/3)T_c}}$$

TABLE I

①	②	③	④	⑤	⑥
J'	T_c	$0.0517T_c$ 0.0517 ②	$\frac{\sqrt{1 + (2/3)T_c}}{\sqrt{1 + (2/3)T_c}}$ ④ / ②	$C_N'_{\alpha_{in}} - 0.138$ ③ / ④	$C_N'_{\alpha_{in}} \text{ (1/rad)}$ 0.138 + ⑤
0.1	33.61	1.74	4.84	0.3600	0.498
0.2	7.703	0.398	2.48	0.1600	0.298
0.4	1.321	0.0683	1.371	0.0498	0.1878
0.6	0.2267	0.0117	1.072	0.0109	0.1489

Step 2. Determine the local angle-of-attack gradient $d\alpha_{in}/d\alpha$.

For this configuration $\Delta y < PR$ and the propeller downwash effect on the local angle-of-attack gradient must be considered.

$$\frac{d\alpha_{in}}{d\alpha} = \frac{1 + \frac{2A}{9(A+10)} \left(\frac{1}{\frac{x_L .75}{c_r} + \frac{1}{10}} + \frac{1}{\frac{x_R .75}{c_r} + \frac{1}{10}} \right) + \frac{1}{2} \left[\left(\frac{R_{fus}}{y_L .75} \right)^2 + \left(\frac{R_{fus}}{y_R .75} \right)^2 \right]}{1 - \frac{1}{4} \sum_{prop 1}^{prop 2} \left[\left(\frac{R}{\Delta y_L .75} \right)^2 + \left(\frac{R}{\Delta y_R .75} \right)^2 \right] \frac{d\epsilon_{z slip}}{d\alpha_{in}}} \quad (\text{equation 9.1.3-e})$$

Propeller 1 (Inboard)

$$\begin{aligned} \left(\frac{d\alpha_{in}}{d\alpha} \right)_1 &= \frac{1 + \frac{2(4.89)}{9(4.89 + 10)} \left(\frac{1}{\frac{5.25}{10} + \frac{1}{10}} + \frac{1}{\frac{5.60}{10} + \frac{1}{10}} \right) + \frac{1}{2} \left[\left(\frac{1.25}{3.25} \right)^2 + \left(\frac{1.25}{12.25} \right)^2 \right]}{1 - \frac{1}{4} \left[\left(\frac{6.0}{4.0} \right)^2 + \left(\frac{6.0}{13.0} \right)^2 \right] \frac{d\epsilon_{z slip}}{d\alpha_{in}}} \\ &= \frac{1 + 0.073 \left(\frac{1}{0.625} + \frac{1}{0.650} \right) + \frac{1}{2} (0.148 + 0.0104)}{1 - 0.25 (2.25 + 0.213) \frac{d\epsilon_{z slip}}{d\alpha_{in}}} \\ &= \frac{1 + 0.073 (3.115) + 0.0792}{1 - 0.25 (2.463) \frac{d\epsilon_{z slip}}{d\alpha_{in}}} \\ &= \frac{1.3067}{1 - (0.616) \frac{d\epsilon_{z slip}}{d\alpha_{in}}} \end{aligned}$$

Propeller 2 (Outboard)

$$\left(\frac{d\alpha_{in}}{d\alpha} \right)_2 = \frac{1 + 0.073 \left(\frac{1}{\frac{4.50}{10} + \frac{1}{10}} + \frac{1}{\frac{4.80}{10} + \frac{1}{10}} \right) + \frac{1}{2} \left[\left(\frac{1.25}{11.75} \right)^2 + \left(\frac{1.25}{20.75} \right)^2 \right]}{1 - (0.616) \frac{d\epsilon_{z slip}}{d\alpha_{in}}}$$

$$= \frac{1 + 0.073 \left(\frac{1}{0.550} + \frac{1}{0.580} \right) + \frac{1}{2} (0.0113 + 0.0036)}{1 - (0.616) \frac{d\epsilon_{zslip}}{d\alpha_{in}}}$$

$$= \frac{1 + 0.073 (3.542) + 0.00745}{1 - (0.616) \frac{d\epsilon_{zslip}}{d\alpha_{in}}}$$

$$= \frac{1.266}{1 - (0.616) \frac{d\epsilon_{zslip}}{d\alpha_{in}}}$$

$$(C_{N\alpha'}^i)_{T_c=0} = 0.138 \quad (\text{step 1 with } T_c=0)$$

$$\frac{d\epsilon_{zslip}}{d\alpha_{in}} = \frac{T_c}{4 + \frac{8}{7} T_c} + \frac{(C_{N\alpha'}^i)_{T_c=0} \sqrt{1 + 1.3 T_c}}{4 + 2 T_c} \quad (\text{equation 9.1.3-f})$$

$$= \frac{T_c}{4 + \frac{8}{7} T_c} + \frac{0.138 \sqrt{1 + 1.3 T_c}}{4 + 2 T_c}$$

TABLE II

①	②	③	④	⑤	⑥	⑦	⑧
J'	T _c	4 + $\frac{8}{7}$ T _c	$\frac{T_c}{\text{③}}$	$\sqrt{1 + 1.3 T_c}$	4 + 2 T _c	$\frac{0.138 \text{ ⑤}}{\text{⑥}}$	④ + ⑦
0.1	33.61	42.41	0.7925	6.69	71.22	0.0130	0.8055
0.2	7.703	12.80	0.6018	3.32	19.41	0.0236	0.6254
0.4	1.321	5.51	0.2397	1.65	6.642	0.0343	0.2740
0.6	0.2267	4.259	0.0532	1.14	4.453	0.0353	0.0885

Using the $\frac{d\epsilon_{zslip}}{d\alpha_{in}}$ values from Table II calculate $\frac{d\alpha_{in}}{d\alpha}$ for propellers 1 and 2.

TABLE III

①	②	③	④	⑤
J'	$\frac{d\epsilon_{zslip}}{d\alpha_{in}}$	$1 - (0.616) \text{ ②}$	$(d\alpha_{in}/d\alpha)_1$ 1.3067/③	$(d\alpha_{in}/d\alpha)_2$ 1.266/③
0.1	0.8055	0.5038	2.594	2.513
0.2	0.6254	0.6148	2.125	2.059
0.4	0.2740	0.8312	1.572	1.523
0.6	0.0885	0.9455	1.382	1.339

Step 3. Determine the propeller normal-force derivatives at zero phase angle with respect to wing angle of attack $C_{N'_\alpha}$

$$C_{N'_\alpha} = C_{N'_{\alpha_{in}}} \frac{d\alpha_{in}}{d\alpha} \text{ per rad (equation 9.1.3-b)}$$

TABLE IV

①	②	③	④
J'	$C_{N'_{\alpha_{in}}}$ (1/rad) Col. ⑥, Table I	$(C_{N'_\alpha})_1$ (1/rad) Col. ④, Table III x ②	$(C_{N'_\alpha})_2$ (1/rad) Col. ⑤, Table III x ②
0.1	0.498	1.292	1.251
0.2	0.298	0.633	0.614
0.4	0.1878	0.295	0.286
0.6	0.1489	0.206	0.199

Step 4. Correct the $C_{N'_\alpha}$ values obtained in step 3 for phase-angle shift.

$$\begin{aligned}
 J_{oP} &= J_{oT} + \frac{16}{\sin(\beta + 5) \cos^4(\beta + 5)} \left(\frac{\sigma_e}{B}\right)^2 && \text{(equation 9.1.3-1)} \\
 &= 0.6725 + \frac{16}{\sin(17) \cos^4(17)} \left(\frac{0.117}{3}\right)^2 \\
 &= 0.6725 + \frac{16}{(0.2924)(0.9563)^4} (0.00152) \\
 &= 0.6725 + 0.0995 \\
 &= 0.772
 \end{aligned}$$

$$\delta_f = 0.825 \tan^{-1} \frac{15 \sigma_e}{B \sqrt{2 J_{o_p} J' - (J')^2}} \quad (\text{equation 9.1.3-h})$$

$$= 0.825 \tan^{-1} \frac{15(0.117)}{3 \sqrt{2(0.772)(J') - (J')^2}}$$

$$= 0.825 \tan^{-1} \frac{0.585}{\sqrt{1.544 J' - (J')^2}}$$

TABLE V

①	②	③	④	⑤	⑥	⑦	⑧
J'	(J') ² ① ²	1.544 J' 1.544 ①	1.544 J' - (J') ² ③ - ②	√④	0.585 ⑤	tan ⁻¹ ⑥ (deg)	δ _f (deg) 0.825 ⑦
0.1	0.01	0.1544	0.1444	0.3800	1.539	57.0	47.0
0.2	0.04	0.3088	0.2688	0.5180	1.129	48.5	40.0
0.4	0.16	0.6176	0.4576	0.6760	0.865	40.9	33.7
0.6	0.36	0.9264	0.5664	0.7530	0.777	37.8	31.2

The $C_{N'_\alpha}$ values are corrected for phase-angle shift by

$$C_{N'_\alpha}(\delta) = C_{N'_\alpha} \cos \delta_f \quad \text{per rad} \quad (\text{equation 9.1.3-g})$$

TABLE VI

①	②	③	④	⑤	⑥
J'	(C _{N'_α}) ₁ (1/rad) Col. ③, Table IV	(C _{N'_α}) (1/rad) Col. ④, Table IV	cos δ _f	(C _{N'_α}) ₁ cos δ _f ② ④	(C _{N'_α}) ₂ cos δ _f ③ ④
0.1	1.292	1.251	0.6820	0.881	0.853
0.2	0.633	0.614	0.7660	0.485	0.470
0.4	0.295	0.286	0.8320	0.245	0.238
0.6	0.206	0.199	0.8554	0.176	0.170

Step 5. Convert the $C_{N'_\alpha}$ values obtained in Step 4 to C_{N_α} .

$$C_{N_\alpha}(0, J') = \frac{\pi}{8} (J')^2 C_{N'_\alpha}(0, J') \quad \text{per rad} \quad (\text{equation 9.1.3-c})$$

TABLE VII

①	②	③	④	⑤
J'	(J') ² ① ²	$\pi/8 (J')^2$ ($\pi/8$) ②	$C_{N\alpha} (0, J')_1$ (1/rad) ③ x Col. ⑤, Table VI	$C_{N\alpha} (0, J')_2$ (1/rad) ③ x Col. ⑥, Table VI
0.1	0.01	0.00393	0.00346	0.00335
0.2	0.04	0.0157	0.00761	0.00738
0.4	0.16	0.0628	0.0154	0.0149
0.6	0.36	0.1414	0.0249	0.0240

Solution:

The variation of propeller normal-force coefficient with angle of attack at the chosen values of J' is tabulated below using

$$C_N (\alpha, J') = C_{N\alpha} (0, J') \tan \alpha \quad (\text{equation 9.1.3-a})$$

for both the inboard and outboard propellers.

$$C_N (\alpha, J')$$

α	tan α	Propeller 1 (Inboard)				Propeller 2 (Outboard)			
		J' = 0.1	0.2	0.4	0.6	J' = 0.1	0.2	0.4	0.6
0	0	0	0	0	0	0	0	0	0
10	0.1763	0.00061	0.00134	0.00272	0.00439	0.00059	0.00130	0.00263	0.00423
20	0.3640	0.00126	0.00277	0.00561	0.00906	0.00122	0.00269	0.00542	0.00874
30	0.5774	0.00200	0.00439	0.00889	0.01438	0.00193	0.00426	0.00860	0.01386
40	0.8391	0.00290	0.00639	0.01292	0.02089	0.00281	0.00619	0.01250	0.02014
50	1.1918	0.00412	0.00907	0.01835	0.0297	0.00399	0.00880	0.0178	0.0286
60	1.7321	0.00599	0.0132	0.0267	0.0431	0.00580	0.0128	0.0258	0.0416
70	2.7475	0.00951	0.0209	0.0423	0.0684	0.00920	0.0203	0.0409	0.0659
80	5.6713	0.0196	0.0432	0.0873	0.1412	0.0190	0.0419	0.0845	0.1361

The calculated values of the normal-force coefficients for both the inboard and outboard propellers are plotted in figure 9.1.3-15.

REFERENCES

1. DeYoung, J.: Force and Moment Derivatives Due to Propellers of Arbitrary Configuration Inclined with Respect to Free Stream. AIAA Preprint No. 64-169, 1964. (U)
2. Ribner, H. S.: Formulas for Propellers in Yaw and Charts of the Side-Force Derivative. NACA TR 819, 1945. (U)
3. Ribner, H. S.: Propellers in Yaw. NACA TR 820, 1945. (U)
4. Ribner, H. S.: Notes on the Propeller and Slipstream in Relation to Stability. NACA ARR L4I12a, 1944. (U)
5. Yaggy, P. F., and Rogallo, V. L.: A Wind-Tunnel Investigation of Three Propellers Through an Angle-of-Attack Range From 0° to 85° . NASA TN D-318, 1960. (U)
6. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Effect of Propeller Slipstreams on Aerodynamic Characteristics of a Wing Equipped with a 50-Percent-Chord Sliding Flap and a 30-Percent-Chord Slotted Flap. NACA TN 3918, 1957. (U)

TABLE 9.1.3-A
COMPARISON OF NORMAL-FORCE DERIVATIVE AT ZERO THRUST
COMPUTED BY DATCOM METHOD 1 WITH THEORY OF REFERENCE 4

Hamilton Standard 3155-6

$\frac{r}{R}$.25	.50	.75	.95
$\frac{b'}{b'_{.75}}$	0.615	1.03	1.00	0.57
	$(C_{N'}\alpha_{in})_{T_C=0}$			% Diff.
σ, σ_e	β (deg)	ref. 4	Datcom Method 1	
$\sigma = .061$	25	.079	.079	0
$\sigma_e = .0527$	25	.111	.109	-1.8
2	35	.134	.137	2.2
Blades	45	.158	.160	1.3
	55	.177	.179	1.1
$\sigma = .091$	15	.112	.112	0
$\sigma_e = .079$	25	.155	.156	0.6
3	35	.194	.196	1.0
Blades	45	.229	.230	0.4
	55	.258	.256	-0.8
$\sigma = .121$	15	.142	.144	1.4
$\sigma_e = .1054$	25	.198	.200	1.0
4	35	.249	.250	0.4
Blades	45	.295	.293	-0.7
	55	.332	.328	-1.2
$\sigma = .182$	15	.192	.197	2.6
$\sigma_e = .158$	25	.271	.276	1.8
6	35	.346	.346	0
Blades	45	.413	.406	-1.7
	55	.471	.452	-4.0
Counter-Rotation				
$\sigma = .182$	15	.250	.253	1.2
$\sigma_e = .158$	25	.332	.329	-0.9
6	35	.393	.392	-0.3
Blades	45	.446	.448	0.4
	55	.490	.490	0

NACA 10-3062-045

$\frac{r}{R}$.25	.50	.75	.95
$\frac{b'}{b'_{.75}}$	1.03	1.03	1.00	0.765
	$(C_{N'}\alpha_{in})_{T_C=0}$			% Diff.
σ, σ_e	β (deg)	ref. 4	Datcom Method 1	
$\sigma = .083$	20	.143	.139	-2.8
$\sigma_e = .081$	25	.162	.161	-0.6
2	35	.204	.202	-1.0
Blades	45	.235	.236	0.4
	55	.260	.263	1.1
$\sigma = .124$	20	.196	.194	-1.0
$\sigma_e = .122$	25	.226	.225	-0.4
3	35	.284	.281	-1.0
Blades	45	.333	.330	-0.9
	55	.372	.368	-1.1
$\sigma = .165$	20	.243	.244	0.4
$\sigma_e = .162$	25	.280	.282	0.7
4	35	.352	.353	0.3
Blades	45	.416	.414	-0.5
	55	.471	.462	-1.9
Counter-Rotation				
$\sigma = .248$	15	.363	.364	0.4
$\sigma_e = .244$	25	.478	.473	-1.0
6	35	.567	.566	-0.2
Blades	45	.634	.642	1.3
	55	.689	.699	1.4

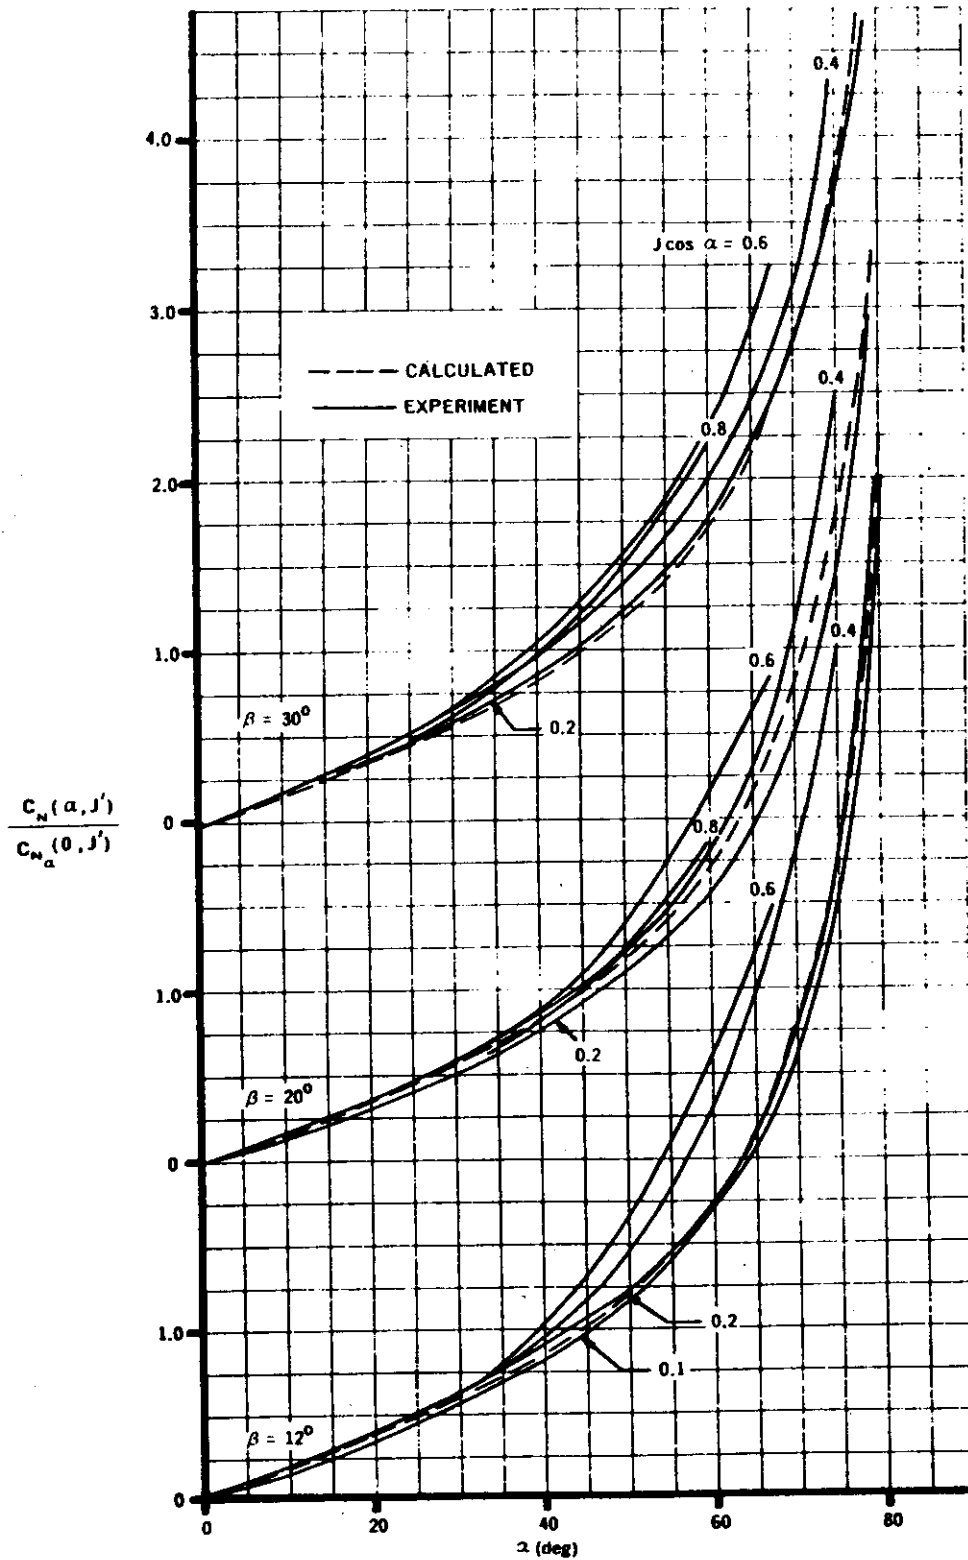


FIGURE 9.1.3-14 COMPARISON OF CALCULATED AND EXPERIMENTAL NORMAL-FORCE RATIO WITH PROPELLER THRUST-AXIS ANGLE OF ATTACK FOR PROPELLER 1 OF REFERENCE 5

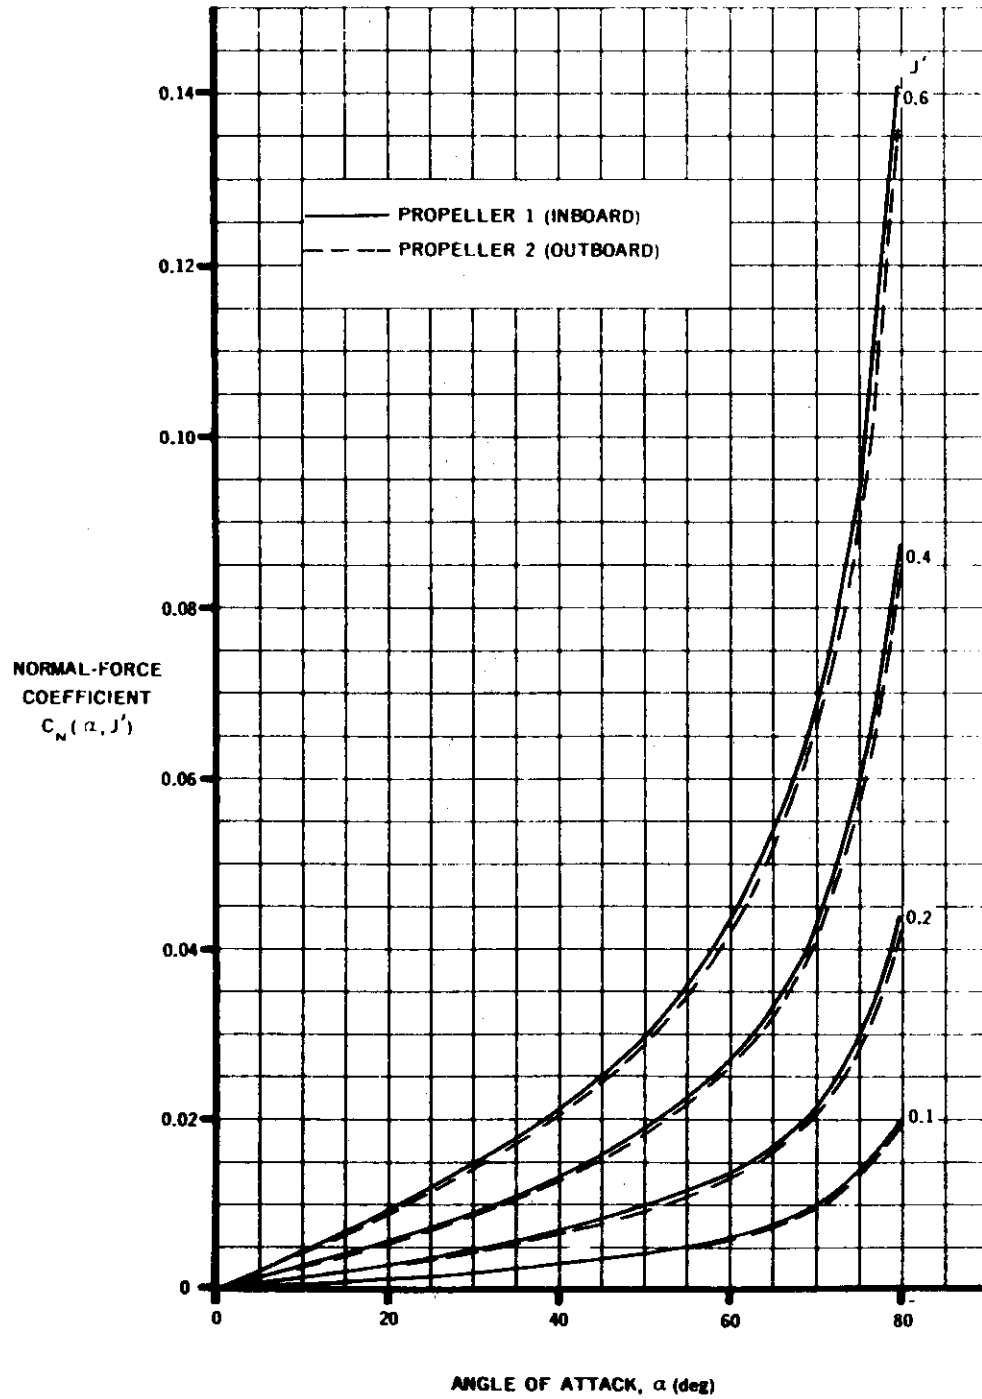


FIGURE 9.1.3-15 VARIATION OF PROPELLER NORMAL-FORCE COEFFICIENT WITH ANGLE OF ATTACK AND MODIFIED ADVANCE RATIO FOR INBOARD AND OUTBOARD PROPELLERS OF A HYPOTHETICAL 4-PROPELLER TILT-WING AIRPLANE. SAMPLE PROBLEM, METHOD 1

9.2 PROPELLER-WING CHARACTERISTICS

The methods of this section are for prediction of the power-on lift and drag forces of propeller-wing combinations of V/STOL aircraft and deal primarily with the low-speed, high-power flight regime where wing stalling tendencies at high angles of attack are delayed by power effects.

The usual approach to attaining V/STOL capabilities is to use power plant thrust to obtain lift at low speeds. Propeller-driven V/STOL configurations, other than those employing ducted propellers, consist basically of three types:

1. Deflected slipstream
2. Tilt wing
3. Combination tilt wing - deflected slipstream

These configurations differ in detail, but each employs interacting wing and thrust systems. In treating such configurations in the low-speed, high-power flight regime we must abandon the familiar distinction between lifting and thrusting systems and combine them.

Several factors dealing with propeller slipstream flow over a wing are of special significance. The local angles of attack of a propeller-wing combination in transition are determined by vector addition of the free-stream and propeller slipstream velocities. The propeller slipstream is a strong factor in reducing the local angles of attack and thereby minimizing the tendency of wing stall. Stalls may occur even in the presence of the slipstream if the slipstream velocity is low.

Since the velocity of the slipstream relative to that of the free stream is increased by increased disk loading, stalling tendencies are decreased by increasing the propeller disk loading. Wing stall can be avoided entirely by immersing the entire wing in the propeller slipstream, provided sufficient thrust is generated by the propellers.

Experimental studies have been conducted to determine the spanwise distribution of the lift increase due to the slipstream at different angles of attack with various free-stream-to-slipstream velocity ratios. The results of these tests, reported in reference 7, indicate that the lift increment due to the passage of a slipstream over a wing consists of two parts:

1. A direct lift gain which can be accurately predicted by potential flow theory.
2. A lift increment due to a "destalling" or boundary-layer-control effect. This "destalling" effect extends to portions of the wing outside the propeller slipstream and improves the wing stalling behavior.

The results also indicate that the limits of the direct slipstream influence are sharply defined and do not vary with wing angle of attack and slipstream strength.

Both references 7 and 61 indicate that the rotation of the propeller slipstream causes an upwash over the wing behind the upward moving blade. This area will generally be the first to stall on a wing that is fully immersed in propeller slipstreams. The effect of propeller rotation on maximum lift was investigated in reference 20, wherein it is concluded that slightly larger values of maximum lift can be generated when propellers rotate with the inboard tips moving up. This lift increase is attributed to a reduction in tip losses resulting from the propeller rotating in such a manner as to oppose the wing-tip vortex and to the fact that the upwash behind the upward moving blade is not entirely cancelled by the downflow at the wing tip.

Propeller-wing combinations in the transition region do not lend themselves to theoretical analysis. The Datcom methods for the prediction of lift and drag forces at forward speed with power on comprise semiempirical expressions from reference 52. These methods employ momentum theory as a starting point. They are based on power-off data and a correlation of slipstream-deflection data at zero forward speed. The correlation of slipstream-deflection data is based on numerous static investigations of a limited number of wing-flap systems. Effects of various parameters on the slipstream-deflection characteristics are summarized in reference 52.

The methods are applicable only in the unstalled flight regime. Comparison of experimental results with calculations made using the Datcom methods indicate that, in general, the estimation procedures give reasonably good results for steady level flight and for climbing flight. Through judicious use of the Datcom methods the lift and drag forces can be estimated for deflected-slipstream, tilt-wing, and combination tilt-wing - deflected-slipstream configurations. At the present time there are no methods available for the prediction of the pitching moment of a propeller-wing configuration in the transition flight regime.

Numerous static and forward speed investigations have been conducted on propeller-driven V/STOL configurations. However, the number of specific designs tested has been so limited that the substantiation of any semiempirical method developed for the prediction of forces and moments has not been possible. Furthermore, excessive wind-tunnel wall effects during simulated low-speed, high-power flight conditions invalidate many investigations.

A comprehensive tabulation of pertinent propeller-wing experimental data is presented as table 9.2-A. This table provides a brief outline of the test data contained in each report and indicates the basic parametric changes made. Additional reports, dealing with complete configurations, can be found in the VTOL-STOL summary table of Section 9.

A general notation list is included in this section for all propeller-wing combination sections. Coefficients are based on the dynamic pressure in the propeller slipstream unless otherwise noted. The conversion from coefficients based on slipstream dynamic pressure to coefficients based on free-stream dynamic pressure is presented at the end of the notation list.

The positive direction of forces and angles is shown in figure 9.2-9.

NOTATION

c	average wing chord, ft
ΔC_D	zero-lift drag increment due to flap deflection based on free-stream velocity
C_{D_f}	power-off zero-lift drag coefficient based on free-stream velocity
C_{D_o}	power-off drag coefficient based on free-stream velocity, $\frac{\text{Drag}}{q_\infty S}$
c_f	average flap chord, ft
C_{F_x}	negative-drag coefficient based on free-stream velocity, $\frac{F_x}{q_\infty S}$
C_{F_x}''	negative-drag coefficient based on slipstream velocity, $\frac{F_x}{q'' S}$
C_{L_o}	power-off lift coefficient based on free-stream velocity, $\frac{L}{q_\infty S}$
C_L''	lift coefficient based on slipstream velocity, $\frac{L}{q'' S}$
D	propeller diameter, ft
e	span efficiency factor
F	resultant force, lb
F_x	horizontal force, lb
$\frac{F}{T}$	thrust-recovery factor
i_w	wing incidence measured between thrust axis and wing chord plane, deg
J	advance ratio, $\frac{V_\infty}{nD}$
K	number of propellers

- L lift, lb
- q_∞ free-stream dynamic pressure, lb/sq ft
- q'' slipstream dynamic pressure, $q_\infty + \frac{T}{S_p}$, lb/sq ft
- S wing area, sq ft
- S_p propeller disk area, $\frac{\pi}{4} D^2$, sq ft
- T thrust per propeller or total thrust when used in thrust-recovery factor, lb
- T_c propeller thrust coefficient based on free-stream velocity and wing area, $\frac{KT}{q_\infty S}$
- T_c'' propeller thrust coefficient based on slipstream velocity and propeller disk area, $\frac{T}{q'' S_p}$
- α angle of attack measured between free stream and thrust axis, deg
- δ flap deflection, deg
- δ_e equivalent flap deflection due to wing camber and incidence, deg
- θ slipstream turning angle measured from thrust axis, deg
- θ_f slipstream turning angle adjusted to the condition of zero camber and zero incidence, deg
- $\Delta\theta$ increment of slipstream turning angle due to wing camber and incidence, deg

Conversion between systems:

(Unprimed coefficients are based on free-stream dynamic pressure.)

$$C_D = \frac{-C_{F_x}''}{1 - T_c''} \quad C_{F_x}'' = \frac{-C_D}{1 + T_c \frac{S}{KS_p}} \quad T_c = \frac{T_c''}{1 - T_c''} \frac{KS_p}{S}$$

$$C_L = \frac{C_L''}{1 - T_c''} \quad C_L'' = \frac{C_L}{1 + T_c \frac{S}{KS_p}} \quad T_c'' = \frac{T_c}{T_c + \frac{KS_p}{S}}$$

$$q_\infty = q'' (1 - T_c'')$$

REFERENCES

1. Anderson, S. B., Quigley, H. C., and Innis, R. C.: Stability and Control Considerations for STOL Aircraft. AIAA Paper 65-715, 1966. (U)
2. Anon: Application of a Mechanical Gyroscopic Stabilizer to VTOL Aircraft. Kellett Aircraft Corp. Report 220A90-2, 1963. (U)
3. Anon: Conference on V/STOL and STOL Aircraft. NASA SP-116, 1966. (U)
4. Beppu, G., and Curtiss, H. C., Jr.: An Analytical Study of Factors Influencing the Longitudinal Stability of Tilt-Wing VTOL Aircraft. Princeton Univ. R 756, USAAVLABS TR-66-53, 1966. (U)
5. Black, E. L., and Booth, G. C.: Correlation of Aerodynamic Stability and Control Derivatives Obtained From Flight Tests and Wind-Tunnel Tests on the XC-142A Airplane. AFFDL TR-68-167, 1968. (U)
6. Boyden, R. P., and Curtiss, H. C., Jr.: Investigation of the Lateral-Directional Stability Characteristics of a Four-Propeller Tilt-Wing VTOL Model at Low Speeds. Princeton Univ. R 743, USAAVLABS TR-68-19, 1968. (U)
7. Brenckmann, M. E.: Experimental Investigation of the Aerodynamics of a Wing in a Slipstream. Jour. Aero. Sci., Vol. 25, No. 5, May 1958. (U)
8. Chambers, J. R., and Grafton, S. B.: Calculation of the Dynamic Longitudinal Stability of a Tilt-Wing V/STOL Aircraft and Correlation With Model Flight Tests. NASA TN D-4344, 1968. (U)
9. Chambers, J. R., and Grafton, S. B.: Static and Dynamic Longitudinal Stability Derivatives of a Powered 1/9-Scale Model of a Tilt-Wing V/STOL Transport. NASA TN D-3591, 1966. (U)
10. Cromwell, C. H., III, and Payne, H. E., III: A Stability Analysis of Tilt-Wing Aircraft (Analytical). Princeton Univ. R 477, 1960. (U)
11. Curnutt, R. A., and Curtiss, H. C., Jr.: Comparison of Longitudinal Stability Characteristics of Three Tilt-Wing VTOL Aircraft Designs. Princeton Univ. R 749, USAAVLABS TR-66-64, 1968. (U)
12. Curtiss, H. C., Jr.: Dynamic Stability of V/STOL Aircraft at Low Speeds. AIAA Paper 69-194, 1969. (U)
13. Curtiss, H. C., Jr., Putman, W. F., and Lebacqz, J. V.: An Experimental Investigation of the Longitudinal Dynamic Stability Characteristics of a Four-Propeller Tilt-Wing VTOL Model. Princeton Univ. R 774, USAAVLABS TR-66-80, 1967. (U)
14. Czinczenheim, J.: Aerodynamic Design and Flight Development of the Breguet 941 STOL Aircraft. RAE-LT-1063, No. 3, 1964. (U)
15. Deckert, W. H., Page, V. R., and Dickinson, S. O.: Large-Scale Wind-Tunnel Tests of Descent Performance of an Airplane Model With a Tilt Wing and Differential Propeller Thrust. NASA TN D-1857, 1964. (U)
16. De Young, J.: Symmetric Loading of a Wing in a Wide Slipstream. Grumman Report ADR-01-04-66.1, 1966. (U)
17. Dickinson, S. O., Page, V. R., and Deckert, W. H.: Large-Scale Wind-Tunnel Investigation of an Airplane Model With a Tilt Wing of Aspect Ratio 8.4 and Four Propellers in the Presence of a Ground Plane. NASA TN D-4493, 1968. (U)
18. Down, H. W., Jr., Jones, G. E., and Satterwhite, J. J.: XC-142A Limited Category II Stability and Control Tests. AFFTC TR-68-9, 1968. (U)
19. Draper, J. W., and Kuhn, R. E.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack Up to 90° . NACA TN 3304, 1954. (U)
20. Draper, J. W., and Kuhn, R. E.: Some Effects of Propeller Operation and Location on Ability of a Wing with Plain Flaps to Deflect Propeller Slipstreams Downward for Vertical Take-Off. NACA TN 3360, 1955. (U)
21. Erlandson, P., Zarcard, J. G., and Olcott, J. W.: Wind-Tunnel Correlation Study of North American Tilt-Wing Model Tested in the NACA L 14' x 16' Tunnel and the Airship Model Test Facility. Naval Air Station, Lakehurst, N. J., 1962. (U)

22. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing With 0.4-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.22 Chord Below Wing. NASA TN D-5016, 1969. (U)
23. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on a Large Semispan Tilting Wing With 0.5-Diameter Chord, Double-Slotted Flap, and Both Left- and Right-Hand Rotation of a Single Propeller. NASA TN D-3375, 1966. (U)
24. Fink, M. P.: Aerodynamic Data on a Large Semispan Tilting Wing With a 0.5-Diameter Chord, a Double-Slotted Flap, and Left- and Right-Hand Rotation of a Single Propeller, in Presence of Fuselage. NASA TN D-3674, 1966. (U)
25. Fink, M. P., and Mitchell, R. G.: Aerodynamic Data on a Large Semispan Tilting Wing With a 0.5-Diameter Chord, a Single-Slotted Flap, and Both Left- and Right-Hand Rotation of a Single Propeller. NASA TN D-3754, 1967. (U)
26. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing With 0.5-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.08 Chord Below Wing. NASA TN D-4030, 1967. (U)
27. Fink, M. P.: Aerodynamic Data on Large Semispan Tilting Wing With 0.5-Diameter Chord, Single-Slotted Flap, and Single Propeller 0.19 Chord Below Wing. NASA TN D-3884, 1967. (U)
28. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on a Large Semispan Tilting Wing With 0.6-Diameter Chord, Fowler Flap, and Single Propeller Rotating Up at Tip. NASA TN D-2180, 1964. (U)
29. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on Large Semispan Tilting Wing With 0.6-Diameter Chord, Single-Slotted Flap, and Single Propeller Rotating Down at Tip. NASA TN D-2412, 1964. (U)
30. Fink, M. P., Mitchell, R. G., and White, L. C.: Aerodynamic Data on Large Semispan Tilting Wing With 0.6-Diameter Chord, Single-Slotted Flap, and Single Propeller Rotating Up at Tip. NASA TN D-1586, 1964. (U)
31. Fink, M. P. and Smith, C. C., Jr.: Pressure Distribution of a Large Semispan Tilting Wing With 0.4-Diameter Chord, Single-Slotted Flap, and a Single Propeller 0.22 Chord Below the Wing. NASA TN D-5481, 1969. (U)
32. George, M., and Kisielowsky, E.: Investigation of Propeller Slipstream Effects on Wing Performance. Dynasciences Corp. Report DCR-234, USAAVLABS TR-67-67, 1967. (U)
33. Goland, L., Miller, N., and Butler, L.: Effects of Propeller Slipstream on V/STOL Aircraft Performance and Stability. TRECOM TR-64-47, 1964. (U)
34. Goodson, K. W.: Effect of Ground Proximity on the Longitudinal, Lateral, and Control Aerodynamic Characteristics of a Tilt-Wing Four-Propeller V/STOL Model. NASA TN D-4237, 1967. (U)
35. Goodson, K. W.: Ground Effects on a Four-Propeller Tilt-Wing Configuration Over a Fixed and a Moving Ground Plane. NASA TN D-3938, 1967. (U)
36. Goodson, K. W.: Longitudinal Aerodynamic Characteristics of a Flapped Tilt-Wing Four-Propeller V/STOL Transport Model. NASA TN D-3217, 1966. (U)
37. Griffin, R. N., Holzhauser, C. A., and Weiberg, J. A.: Large-Scale Wind-Tunnel Tests of an Airplane Model With an Unswept, Aspect-Ratio-10 Wing, Two Propellers, and Blowing Flaps. NASA Memo 12-3-58A, 1958. (U)
38. Grunwald, K. J.: Experimental Investigation of Wind-tunnel Wall Effects and Wall Corrections for a General-Research V/STOL Tilt-Wing Model With Flap. NASA TN D-2887, 1965. (U)
39. Grunwald, K. J.: Investigation of a Semispan Tilt-Wing VTOL Model to Determine Ground Effect on Full-Span Flaps Used for Yaw Control in Hovering. NASA TN D-3437, 1966. (U)
40. Hayes, W. C., Jr., Kuhn, R. E., and Sherman, I. R.: Effects of Propeller Position and Overlap on the Slipstream Deflection Characteristics of a Wing-Propeller Configuration Equipped with a Sliding and Fowler Flap. NACA TN 4404, 1958. (U)
41. Holzhauser, C. A., Innis, R. C., and Vomaska, R. F.: A Flight and Simulator Study of the Handling Qualities of a Deflected Slipstream STOL Seaplane Having Four Propellers and Boundary-Layer Control. NASA TN D-2966, 1965. (U)
42. Huang, K. P., Goland, L., and Bolin, I.: Charts for Estimating Aerodynamic Forces on STOL Aircraft Wings Immersed in Propeller Slipstreams. Dynasciences Corp. Report DCR-161, 1965. (U)
43. Kirby, R. H.: Aerodynamic Characteristics of Propeller-Driven VTOL Aircraft. NASA TN D-730, 1961. (U)

44. Kirby, R. H., Schade, R. O., and Tosti, L. P.: Force-Test Investigation of a 1/4-Scale Model of the Modified VZ-2 Aircraft. NASA TN D-2382, 1964. (U)
45. Kuhn, R. E., and Draper, J. W.: Investigation of the Aerodynamic Characteristics of a Model Wing-Propeller Combination and of the Wing and Propeller Separately at Angles of Attack Up to 90°. NACA TR 1263, 1956. (U)
46. Kuhn, R. E., and Draper, J. W.: Investigation of Effectiveness of Large-Chord Slotted Flaps in Deflecting Propeller Slipstreams Downward for Vertical Take-Off and Low-Speed Flight. NACA TN 3364, 1955. (U)
47. Kuhn, R. E.: Investigation of Effectiveness of a Wing Equipped With a 50-Percent-Chord Sliding Flap, a 30-Percent-Chord Slotted Flap, and a 30-Percent-Chord Slat in Deflecting Propeller Slipstreams Downward for Vertical Take-Off. NACA TN 3919, 1957. (U)
48. Kuhn, R. E.: Investigation of the Effects of Ground Proximity and Propeller Position on the Effectiveness of a Wing with Large-Chord Slotted Flaps in Redirecting Propeller Slipstreams Downward for Vertical Take-Off. NACA TN 3629, 1956. (U)
49. Kuhn, R. E., and Draper, J. W.: An Investigation of a Wing-Propeller Configuration Employing Large-Chord Plain Flaps and Large-Diameter Propellers for Low-Speed Flight and Vertical Take-Off. NACA TN 3307, 1954. (U)
50. Kuhn, R. E.: Investigation at Zero Forward Speed of a Leading-Edge Slat as a Longitudinal Control Device for Vertically Rising Airplanes That Utilize the Redirected-Slipstream Principle. NACA TN 3692, 1956. (U)
51. Kuhn, R. E., and Spreemann, K. P.: Preliminary Investigation of the Effectiveness of a Sliding Flap in Deflecting a Propeller Slipstream Downward for Vertical Take-Off. NACA TN 3693, 1956. (U)
52. Kuhn, R. E.: Semiempirical Procedure for Estimating Lift and Drag Characteristics of Propeller-Wing-Flap Configurations for Vertical- and Short-Take-Off-and-Landing Airplanes. NASA Memo 1-16-59L, 1959. (U)
53. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Effect of Propeller Slipstreams on Aerodynamic Characteristics of a Wing Equipped With a 50-Percent-Chord Sliding Flap and a 30-Percent-Chord Slotted Flap. NACA TN 3918, 1957. (U)
54. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of Three Propeller-Driven VTOL Configurations in the Transition Speed Range, Including Effects of Ground Proximity. NASA TN D-55, 1960. (U)
55. LaMont, C. W.: Power-On Lift and Drag of Tractor Propeller Tilt-Wing and Deflected Slipstream Configurations. (Unpublished Report) Douglas Aircraft Company, 1963. (U)
56. Levinsky, E. S., Thommen, H. U., et al: Lifting Surface Theory and Tail Downwash Calculations for V/STOL Aircraft in Transition and Cruise. USAAVLABS TR-68-67, 1968. (U)
57. Longhurst, W. S.: A Report on Stability and Control Testing of a Tilt Wing V/STOL Aircraft. SAE Paper 660315, 1966. (U)
58. Margason, R. J., Hammond, A. D., and Gentry, G. L.: Longitudinal Stability and Control Characteristics of a Powered Model of a Twin-Propeller Deflected-Slipstream STOL Airplane Configuration. NASA TN D-3438, 1966. (U)
59. Matsuoka, K., Takahashi, M., and Yonezawa, M.: Aerodynamic Characteristics of Propeller-Wing-Flap Systems. Osaka Univ., Eng. and Natural Sci. Bulletin, Series A, Vol. 17, No. 1, 1968. (U)
60. Michaelsen, D. E.: The CL-84 V/STOL Flight Simulation - A Comparison With Reality. ICAS Paper 66-18, 1966. (U)
61. Mitchell, R. G.: Full-Scale Wind-Tunnel Test of the VZ-2 VTOL Airplane With Particular Reference to the Wing Stall Phenomena. NASA TN D-2013, 1963. (U)
62. Neal, B.: The Static and Forward-Speed Testing of a Flapped Wing With Boundary-Layer Control for Use in Deflecting Propeller Slipstreams Downward for Vertical Take-Off, Part II: Tests at Incidence and Ground Proximity Effects. NRC LR-383, 1963. (U)
63. Newsom, W. A., Jr., and Kirby, R. H.: Flight Investigation of Stability and Control Characteristics of a 1/9-Scale Model of a Four-Propeller Tilt-Wing V/STOL Transport. NASA TN D-2443, 1964. (U)
64. Page, V. R., Dickinson, S. O., and Deckert, W. H.: Large-Scale Wind-Tunnel Tests of a Deflected-Slipstream STOL Model With Wings of Various Aspect Ratio. NASA TN D-4448, 1968. (U)

65. Payne, H. E., III, and Cromwell, C. H., III: A Stability Analysis of Tilt-Wing Aircraft (Experimental). Princeton Univ. Rept. 478, 1960. (U)
66. Pegg, R. J., Kelley, H. L., and Reeder, J. P.: Flight Investigation of the VZ-2 Tilt-Wing Aircraft With Full-Span Flap. NASA TN D-2680, 1965. (U)
67. Putman, W. F.: An Experimental Investigation of Ground Effect of a Four-Propeller Tilt-Wing V/STOL Model. USAAVLABS TR-68-45, 1968. (U)
68. Putman, W. F.: An Investigation of the Lateral-Directional Dynamic Stability Characteristics of a Tilt-Wing V/STOL Transport Model in Simulated Low-Speed Descending Flight. USAAVLABS TR-69-46, 1969. (U)
69. Quigley, H. C., Innis, R. C., and Holzhauser, C. A.: A Flight Investigation of the Performance, Handling Qualities, and Operational Characteristics of a Deflected Slipstream STOL Transport Airplane Having Four Interconnected Propellers. NASA TN D-2231, 1964. (U)
70. Quigley, H. C., and Innis, R. C.: Handling Qualities and Operational Problems of a Large Four-Propeller STOL Transport Airplane. NASA TN D-1647, 1963. (U)
71. Schade, R. O., and Kirby, R. H.: Effect of Wing Stalling in Transition on a 1/4-Scale Model of the VZ-2 Aircraft. NASA TN D-2381, 1964. (U)
72. Spreemann, K. P.: Effectiveness of Boundary-Layer Control, Obtained by Blowing Over a Plain Rear Flap in Combination With a Forward Slotted Flap, in Deflecting a Slipstream Downward for Vertical Take-Off. NACA TN 4200, 1958. (U)
73. Spreemann, K. P., and Davenport, E. E.: Investigation of the Aerodynamic Characteristics of a Combination Jet-Flap and Deflected-Slipstream Configuration at Zero and Low Forward Speeds. NASA TN D-363, 1960. (U)
74. Spreemann, K. P., and Kuhn, R. E.: Investigation of the Effectiveness of Boundary-Layer Control by Blowing Over a Combination of Sliding and Plain Flaps in Deflecting a Propeller Slipstream Downward for Vertical Take-Off. NACA TN 3904, 1956. (U)
75. Spreemann, K. P.: Investigation of the Effects of Propeller Diameter on the Ability of a Flapped Wing, With and Without Boundary-Layer Control, to Deflect a Propeller Slipstream Downward for Vertical Take-Off. NACA TN 4181, 1957. (U)
76. Spreemann, K. P.: Investigation of a Semispan Tilting-Propeller Configuration and Effects of Ratio of Wing Chord to Propeller Diameter on Several Small-Chord Tilting-Wing Configurations at Transition Speeds. NASA TN D-1815, 1963. (U)
77. Stapleford, R. L., Wolkovitch, J., et al: An Analytical Study of V/STOL Handling Qualities in Hover and Transition. AFFDL-TR-65-73, 1965. (U)
78. Stenning, T. A., and Dolan, J. A.: Lateral-Directional Simulation of the CL-84 V/STOL Aircraft in the Transition Regime. AIAA Paper 64-806, 1964. (U)
79. Taylor, R. T.: Wind-Tunnel Investigation of Effect of Ratio of Wing Chord to Propeller Diameter With Addition of Slats on the Aerodynamic Characteristics of Tilt-Wing VTOL Configurations in the Transition Speed Range. NASA TN D-17, 1959. (U)
80. Traybar, J. J.: Aerodynamic Characteristics of a General Tilt-Wing Propeller Model Tested at Slow Speeds and High Angles of Attack. Princeton Univ. R 807, USAAVLABS TR-67-79, 1968. (U)
81. Turner, H. L., and Drinkwater, F. J.: Some Flight Characteristics of a Deflected Slipstream V/STOL Aircraft. NASA TN D-1891, 1963. (U)
82. Weiberg, J. A., and Holzhauser, C. A.: Large-Scale Wind-Tunnel Tests of an Airplane Model With an Unswept, Tilt Wing of Aspect Ratio 5.5, and With Four Propellers and Blowing Flaps. NASA TN D-1034, 1961. (U)
83. Weiberg, J. A., and Giulianetti, D. J.: Large-Scale Wind-Tunnel Tests of an Airplane Model With an Unswept Tilt Wing of Aspect Ratio 5.5, and With Various Stall Control Devices. NASA TN D-2133, 1964. (U)
84. Weiberg, J. A., and Giulianetti, D. J.: Wind-Tunnel Investigation of a Tilt-Wing VTOL Airplane With Articulated Rotors. NASA TN D-2538, 1965. (U)
85. White, H. E.: Wind-Tunnel Tests of an Aerodynamically Controlled Tilting-Wing VTOL Configuration. DTMB Aero-1057, 1963. (U)

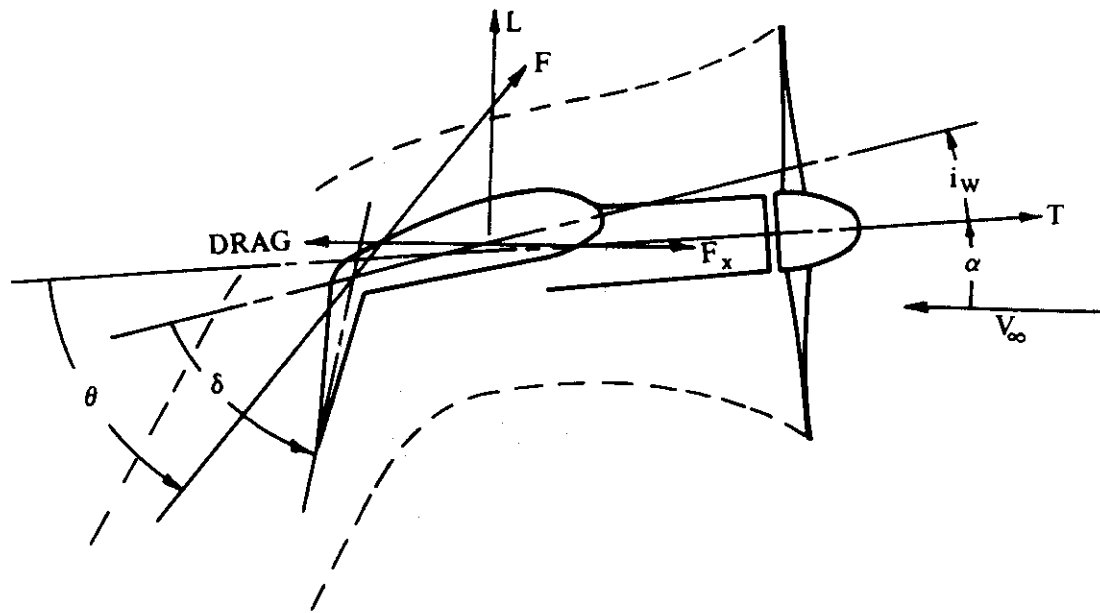


FIGURE 9.2-9 CONVENTIONS USED TO DEFINE POSITIVE SENSE OF FORCES AND ANGLES

TABLE 9.2-A
SUMMARY OF EXPERIMENTAL PROPELLER-WING DATA

REFERENCE NO.	YEAR OF PUBLICATION	WING AIRFOIL SECTION	WING ASPECT RATIO	CONFIGURATION GEOMETRY				WING CHORD (IN) / RETRACTOR	PROPPELLER QUARTER (BT)	BLADES PER PROPPELLER	NUMBER PER SPAN	AUXILIARY TURNING AIDS	PROPPELLER DIAMETER WING CHORD	MAX. ADVANCE RATIO	TEST CONDITIONS					TEST DATA												
				TYPE OF FLAP	FLAP CHORD TO AIRFOIL	PROPPELLER TURNING AIDS	WING CHORD								RANGE	SLIPSTREAM DYNAMIC PRESSURE (BASED ON WING MACH)	SLIPSTREAM REYNOLDS NUMBER (BASED ON WING)	STATIC TURNING EFFECTIVENESS	TRANSITION PERFORMANCE	GROUND EFFECTS	PROPPELLER FORCES	PROPPELLER LOCATION VARIED	PROPPELLER RPM	SUPERSTRAK DYN. PRESS. SURVEY	DOWNWASH SURVEY	POWER						
																											WIND TUNNEL	PROPPELLER TIP	PROPPELLER LOCATION	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP
				WIND TUNNEL	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP								PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP	PROPPELLER TIP									
4	8.53	NACA 65-318		DOUBLE SLOTTED		1.56	4	2	-	-	1.92	-15° - 15°					X															
5	8.53	NACA 65-318		DOUBLE SLOTTED		1.55	4	2	LE SLAT		1.88				(a) 463 (b) 542 (c) 641	X	X							X								
6	8.53	NACA 65-318		DOUBLE SLOTTED		1.55	4	2	KRUGER FLAP		78						X															
7	58	NACA 65-318		-		.67	2	17/SPAN			1.0	0 - 17°						X														
8	8.53	NACA 65-318		DOUBLE SLOTTED		1.72	4	2	LE SLAT		1.92																					
9	8.53	NACA 65-318		DOUBLE SLOTTED		1.72	4	2	LE SLAT		1.92	-30° - 30°																				
10	60	NACA 6015		DOUBLE SLOTTED		1.17	3	1			1.77	0 - 40°						X														
11	68	(a) 5.3 (b) 8.7 (c) 8.5		-		(a) 0.9 (b) 2.4 (c) 1.72	(a) 3 (b) 4 (c) 4	(a) 1 (b) 1 (c) 1			(a) 2.0 (b) 2.0 (c) 1.82																					
12	68	-		-		-	-	-			-	-																				
13	67	NACA 65-318		DOUBLE SLOTTED		1.85	4	2	KRUGER FLAPS		1.92	-15° - 15°																				
14	64	NACA 65A16		TRIPLE SLOTTED		14.76	3	2	AILERONS		1.21																					
15	64	NACA 23017 WITH LE OF NACA 65-318		DOUBLE SLOTTED		9.3	3	2	LE SLATS, KRUGER FLAPS		1.86	-16° - 22°																				

TABLE 9.2-A (CONT'D)

REFERENCE NO.	YEAR OF PUBLICATION	WING ASPECT RATIO	CONFIGURATION GEOMETRY								TEST CONDITIONS				TEST DATA				COMMENTS							
			WING AIRFOIL SECTION	TYPE OF FLAP	FLAP CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTED)	PROPELLER DIAMETER (FT)	BLADES PER PROPELLER	NUMBER PROPELLERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPELLER DIAMETER WING CHORD	* RANGE	MAX. ADVANCE RATIO	SLIPSTREAM DYNAMIC PRESSURE (LB/FT ²)	SLIPSTREAM REYNOLDS NUMBER BASED ON WING MAC	STATIC TURNING EFFECTIVENESS	TRANSITION EFFECTIVENESS	GROUND PERFORMANCE	PROPELLER FORCES		PROPELLER LOCATION VARIED	PROPELLER ROTATION MODE	PROPELLER RPM	SLIPSTREAM DYN. PRESS. SURVEY	DOWNWASH SURVEY	POWER	
17	68	8.35	NACA 23017	DOUBLE SLOTTED	.33	9.3	3	2	LE SLATS	1.86						X										LARGESCALE TILT-WING V/STOL TRANSPORT IN AMES 40 x 80-FT TUNNEL. PROPELLERS OVERLAPPED. FIXED GROUND PLANE. EFFECT OF GROUND HEIGHT ON FLAP EFFECTIVENESS AND AIR CONTROL IN HOVER. EFFECT OF GROUND HEIGHT, FLAPS, SLATS, WING TILT ON LONG CHORD TURNING AIDS AT VARIOUS GROUND HEIGHTS. WING TILT ANGLES, THRUST COEFFICIENTS, AND PROPELLER RPM.
18	68	8.53	NACA 63-318	DOUBLE SLOTTED	.33	15.625	4	2	LE SLATS	1.94						X										
19	64	4.55	NACA 0015	PLAIN	.30	2	3	2		1.32						X										FLIGHT TESTS ON XC-142A PROTOTYPE. A TILT-WING, DEFLECTED-SLIPSTREAM CARGO ASSAULT AIRCRAFT AT EDWARDS AFB. PROPELLERS OVERLAPPED. CATEGORY II PERFORMANCE EVALUATION OF STATIC AND DYNAMIC LONG STABILITY, LATERAL DIRECTIONAL STABILITY, MANEUVERING STABILITY, TAKEOFF, CONVERSIONS, ETC.
20	55	4.55	NACA 0015	PLAIN	.60	2	3	2.1	2 VANES	1.33						X										SEMISPAN WING IN SLIPSTREAM OF 2 LARGE-DIAM PROPELLERS. PROPELLERS OVERLAPPED. TILT WING AND PROPELLER TEST SEPARATELY AND IN COMBINATION IN LANGLEY 300-FT, 10-FT TUNNEL. PROPELLER EFFICIENCY DATA. EFFECT OF PROPELLERS' THRUST AND MACELLES ON AERO CHAR. EFFECT OF SLIPSTREAM ON VARIATION OF LIFT CURVE SLOPE WITH THRUST.
22	69	6.14	NACA 4420	SINGLE SLOTTED	.40	5.67	4	1	LE SLAT	2.5						X										SEMISPAN MODEL. PROPELLERS OVERLAPPED. EFFECTS OF PROPELLER BLADE ANGLE, MODE OF PROPELLER ROTATION, PROPELLER LOCATION, AND RATIO OF WING CHORD TO PROPELLER DIAMETER ON TURNING EFFECTIVENESS, LONG AND VERTICAL POSITION OF PROPELLERS VARIED. EFFECT OF WING CHORD FROM FLAT PLATE WINGS. SOME DATA WITH AUX VANES.
23	66	4.88	NACA 4415	DOUBLE SLOTTED	.35	5.67	4	1	LE SLAT	2.0						X										LARGESCALE SEMISPAN TILT WING AND FUSELAGE IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF PROPELLER ROTATION DIRECTION, FENCES, SLATS, AND FLAP DEFLECTION ON AERO DATA. TABULATED AND PLOTTED. TUFT STUDIES.
24	66	4.88	NACA 4415	DOUBLE SLOTTED	.35	5.67	4	1	LE SLATS	2.0						X										LARGESCALE SEMISPAN TILT-WING IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF FENCES, SLATS IN 2 POSITIONS, FLAP DEFLECTION, AND PROPELLER ROTATION DIRECTION ON AERO CHAR. TUFT STUDIES.
25	67	4.88	NACA 4415	SINGLE SLOTTED	.40	5.67	4	1	LE SLATS	2.0						X										LARGE SEMISPAN TILT WING AND FUSELAGE IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF FENCES, SLATS, FLAP DEFLECTION, AND PROPELLER ROTATION DIRECTION ON AERO CHAR. TUFT STUDIES. LOADS ON FUSELAGE (LIFT ONLY).
26	67	4.88	NACA 4415	SINGLE SLOTTED	.40	5.67	4	1	LE SLATS	2.0						X										LARGESCALE SEMISPAN TILT WING AND FUSELAGE IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF FENCES, SLATS, FLAP DEFLECTION, AND PROPELLER ROTATION DIRECTION ON LONG AERO CHAR. TUFT STUDIES. LOADS ON FUSELAGE (LIFT ONLY).
27	67	4.88	NACA 4415	SINGLE SLOTTED	.40	5.67	4	1	LE SLATS	2.0						X										LARGE SCALE SEMISPAN TILT WING AND FUSELAGE IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF FENCES, SLATS IN 2 POSITIONS, FLAP DEFLECTION, AND PROPELLER ROTATION DIRECTION ON LONG AERO CHAR. TUFT STUDIES. LOADS ON FUSELAGE, LIFT ONLY.
28	64	4.05	NACA 4415	FOWLER	.40	5.67	4	1	LE SLAT, DROOP NOSE, KRUEGER FLAP	1.67						X										LARGESCALE SEMISPAN TILT WING IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF VARIOUS LE DEVICES AND FLAP DEFLECTION ON LONG AERO CHAR. TUFT STUDIES.

TABLE 9.2.A (CONT'D)

REFERENCE NO.	YEAR OF PUBLICATION	WING ASPECT RATIO	CONFIGURATION GEOMETRY						TEST CONDITIONS			TEST DATA						COMMENTS								
			WING AIRFOIL SECTION	TYPE OF FLAP	FLAP CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTED)	PROPELLER DIAMETER (IN)	BLADES PER PROPELLER	NUMBER PROPELLERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPELLER DIAMETER WING CHORD	WING CHORD RANGE	MAX. ADVANCE RATIO	SLIPSTREAM DYNAMIC PRESSURE (LB/FT ²)	SLIPSTREAM REYNOLDS NUMBER (BASED ON WING MAC)	STATIC TURNING EFFECTS	TRANSITION PERFORMANCE	PROPELLER FORCES		PROPELLER LOCATION VARIED	PROPELLER ROTATION MODE	PROPELLER RPM	SLIPSTREAM DYN. PRESS. SURVEY	DOWNWASH SURVEY	POWER		
29	64	4.05	NACA 4415	SINGLE SLOTTED	.40	5.67	4	1	1	LE SLAT, DROOP NOSE, KRUEGER FLAP	1.67	-20° → 90°														LARGE-SCALE SEMISPAN TILT-WING IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF VARIOUS LE DEVICES AND FLAP DEFLECTION ON LONG AERO CHAR. TUFT STUDIES
30	64	4.05	NACA 4415	SINGLE SLOTTED	.40	5.67	4	1	1	LE SLAT, KRUEGER FLAP	1.67	-20° → 90°														LARGE-SCALE SEMISPAN TILT-WING IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF LE SLATS AND KRUEGER FLAPS ON LONG AERO CHAR. TUFT STUDIES.
31	61	6.1	NACA 4420	SINGLE SLOTTED	.40	5.67	4	1	1	LE SLAT	2.5	5° → 80°														SEMISPAN TILT-WING AND FUSELAGE IN LANGLEY TUNNEL. TABULATED PRESSURE DISTRIBUTION SHOWING EFFECT OF FLAP DEFLECTION, PROPELLER ROTATION DIRECTION, SLATS, AND FENCES. TUFT STUDIES. PLOTS OF TYPICAL CHORDWISE PRESSURE DISTRIBUTION, SPANWISE SECTION NORMAL-FORCE COEFFICIENTS, AND CHORDWISE PRESSURE DISTRIBUTION AT VARIOUS SPANWISE STATIONS.
32	67	6.37	NACA 0015	SPLIT	.33	3.26	2				2.17	0 → 90°	8													SEMISPAN SEGMENTED WING ON SEMIFUSELAGE IN LOW-SPEED NAA TUNNEL. EFFECT OF PROPELLER SLIPSTREAM ON SPANWISE DISTRIBUTION OF LIFT, DRAG, PITCHING MOMENTS, AND TOTAL WING FORCES AND MOMENTS. STALL CHAR. OF WING IMMERSED IN SLIPSTREAM SURVEY OF VELOCITY FIELD IN PROPELLER SLIPSTREAM. EFFECTS OF FLAPS, THRUST, AND PROPELLER GEOMETRY. TUFT STUDIES. COMPUTER PROGRAM. THEORETICAL AND EXPERIMENTAL DATA COMPARED.
33	64							1, 2																		ANALYTIC INVESTIGATION OF AERO FORCES ON WING-PROPELLER COMBINATION. RESULTS APPLIED TO V1STOL AIRCRAFT. EFFECT OF PROPELLER SLIPSTREAM ON WING STALL TAKE-OFF AND LANDING PERFORMANCE.
34	67	8.51	NACA 63-318	DOUBLE SLOTTED	.33	1.41	4	2		LE SLAT	1.92		10													1/11-SCALE TILT-WING IN LANGLEY 300MPH 7 x 10-FT TUNNEL. PROPELLERS OVERLAPPED MOVING-BELT GROUND PLANE. SMOKE-FLOW STUDY. EFFECT OF GROUND PLANE ON WING TILT ANGLE, FLAP DEFLECTION, HORIZONTAL-TAIL INCIDENCE, AND PROPELLER ROTATION DIRECTION ON AERO CHAR. EFFECT OF NOSE STRAKES, ASYMMETRIC RPM, AILERON DEFLECTION, AND SPOILERS.
35	67	8.28	NACA 63-318	DOUBLE SLOTTED	.33	1.41	4	2		LE SLAT	1.92	-8° → 24°	10													FULL-SPAN 1/11-SCALE TILT-WING MODEL IN LANGLEY 300MPH 7 x 10-FT TUNNEL. PROPELLERS OVERLAPPED MOVING-BELT GROUND PLANE. EFFECT OF THRUST INCIDENCE ON WING STALL, MOVING GROUND PLANE, WING INCIDENCE, AND HORIZONTAL-TAIL INCIDENCE ON AERO CHAR.
36	66	8.28	NACA 63-318	DOUBLE SLOTTED	.33	1.41	4	2		LE SLAT, DROOP NOSE	1.92	-30° → 40°	10													1/11-SCALE TILT-WING IN LANGLEY 300MPH 7 x 10-FT TUNNEL. PROPELLERS OVERLAPPED. THREADED GROUND BOARD. EFFECT OF THRUST, WING INCIDENCE, HORIZONTAL-TAIL INCIDENCE, PROPELLER BLADE ANGLE, FLAPS, SLATS, NOSE DROOP, AND GROUND ON LONG AERO CHAR.
37	58	9.86	NACA 29017	SLOTTED		6.75	4	1		LE FLAP, BEAMING BLC, DROOPED AILERON	1.43	-8° → 20°														LARGE-SCALE, STRAIGHT-WING MODEL IN AMES 40 x 80-FT TUNNEL. EFFECT OF THRUST, STABILIZER INCIDENCE, NOZZLE HEIGHT, FLAP AND AILERON JET MOMENTUM, FLAPS, AND LE FLAPS ON AERO CHAR. EFFECT OF DROOPED AILERON ON LATERAL CONTROL.
38	66	2.82	NACA 0015	SINGLE SLOTTED	.30		3	1			1.33	0 → 90°														TILT-WING IN LANGLEY 300MPH 7 x 10-FT TUNNEL. 17-FT SECTION OF 7 x 10-FT TUNNEL AND FULL-SCALE TUNNEL. EFFECT OF TUNNEL SIZE, REYNOLDS NUMBER, AND FLAPS ON LONG AERO CHAR. DATA FROM FIRST 2 TUNNELS CORRECTED BY THEORY AND COMPARED WITH DATA FROM FULL-SCALE TUNNEL TO DETERMINE WALL EFFECTS AND VALIDITY OF WALL CORRECTION THEORY (GIVEN IN APP II).

TABLE 9.2-A (CONT'D)

REFERENCE NO.	CONFIGURATION GEOMETRY										TEST CONDITIONS					TEST DATA					COMMENTS				
	WIND ASPECT RATIO	WING AIRFOIL SECTION	TYPE OF FLAP	FLAP CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTOR)	PROPELLER DIAMETER (FT)	BLADES PER PROPELLER	NUMBERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPELLER DIAMETER	WING CHORD	WING CHORD RANGE	MAY ADVANCE RATIO	SUPSTREAM DYNAMIC PRESSURE (LBS/FT ²)	SUPSTREAM REYNOLDS NUMBER (BASED ON WING MAC)	STATIC TURNING EFFECTIVENESS	GROUND EFFECTS	PROPELLER FORCES	PROPELLER LOCATION	PROPELLER ROTATION MODE	PROPELLER RPM		SUPSTREAM DYN. PRESS. SUBRAY	DOWNWASH SUBRAY	POWER	
8	7.64	NACA 4415	(A) DOUBLE SLOTTED (B) SINGLE SLOTTED (C) DOUBLE SLOTTED (D) PLAIN	.15 .25 .40 .40 .44	2	3	2	1.87	1.67	VARIES	0	8	X	X	X	X	X	X	X	X	X	X	X	X	A SEMISPAN TILT-WING VTOL MODEL WITH 6 FLAPS USED FOR YAW CONTROL. NO PROPELLER OVERLAP. TUFT STUDIES. EFFECT OF FLAP-CHORD-TO-PROPELLER-DIAMETER RATIO, TYPE OF FLAP, LENGTH OF FLAP CHORD, FLAP DEFLECTION, AILERON CUTOFFS, AND GROUND PROXIMITY ON AERO CHAR.
9	7.88	NACA 4415	SLIDING, POWER (SLOTTED)	.25	2	3	2.1	1.87	1.67	VARIES	0	8	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. EFFECTS OF PROPELLER POSITION AND OVERLAP ON SLIPSTREAM DEFLECTION CHAR. EFFECTS OF PROPELLER VERTICAL POSITION, CHORDWISE POSITION, AND OVERLAP. EFFECTS OF LE SLAT, MACELLE SIZE, EXTENSION OF MACELLE THROUGH FLAPS (FLAP SEGMENTATION), AND NUMBER OF PROPELLERS. EFFECT OF GROUND PROXIMITY ON PROPELLER STATIC THRUST EFFICIENCY. ANGLE BETWEEN THRUST AXIS AND GROUND PLANE VARIES WITH FLAP DEFLECTION.
41	7.67	NACA 23017, NACA 23012	SLIDING, POWER (SLOTTED)	.11 .11 .11 .11 .11	2	3	2	1.87	1.67	VARIES	0	8	X	X	X	X	X	X	X	X	X	X	X	X	FLIGHT AND SIMULATOR TESTS OF BTOL BEAPLANE UP-32 COMPARED, DEFLECTED-SLIPSTREAM TYPE. NO PROPELLER OVERLAP. MOVING-BASE SIMULATOR. AUTOMATIC STABILIZATION EQUIPMENT IN PLANE. COMPARISON WITH FLIGHT TESTS OF OTHER STOL VEHICLES AND WITH BREGUET 941 SIMULATOR STUDIES. HANDLING QUALITIES RATHER THAN PERFORMANCE OF CHIEF CONSIDERATION.
42	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EQUATIONS ESTIMATING LIFT AND LONG FORCE COEFFICIENTS FOR STOL AND WINGS IN PROPELLER SLIPSTREAMS. COMPARISON WITH TEST DATA. EFFECTS OF PROPELLER SLIPSTREAM, PROPELLER THRUST, TAPER RATIO, SLATS, FLAP-CHORD-TO-WING-CHORD RATIO, PROPELLER DIAMETER-TO-CHORD RATIO, AND WING CAMBER.
43	-	-	SLOTTED	-	2	3	2	LE SLAT	1.76	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	TILT-WING AND DEFLECTED-SLIPSTREAM CONFIG. NO PROPELLER OVERLAP. AERO CHAR. OF VTOL IN HOVER AND TRANSITION. EFFECTS OF WING CHORD, SLATS, AND FLAPS ON POWER REQUIRED.
44	4.78	NACA 4415	SLIDING	.35	3	3	1	LE DROOP	1.76	-10° → 20°	50	80	X	X	X	X	X	X	X	X	X	X	X	X	1/4-SCALE, FULL-SPAN MODEL OF VZ2. FULL-SPAN AILERONS. EFFECT OF FLAPS AND LE DROOP ON AERO CHAR. EFFECT OF FLAP DEFLECTION ON FLOW PATTERNS. TUFT TESTS. AILERON CONTROL EFFECTIVENESS.
45	4.88	NACA 0015	-	-	3	2	-	-	1.33	-10° → 90°	50	80	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN TILT-WING MODEL. PROPELLERS OVERLAPPED. INVESTIGATION OF WING-PROPELLER COMBINED AND SEPARATELY. MACELLE EFFECTS. PROPELLER EFFICIENCY, SPINNER CHARACTERISTICS, PITCHING-MOMENT INCREMENT DUE TO PROPELLERS, AERODYNAMIC INDEXES, TURNING WALL CORRECTIONS, (2) SLIPSTREAM CHARACTERISTICS, (3) PERFORMANCE CALCULATIONS.
46	4.88	NACA 0015	SLOTTED	.60 .30	3	3	2.1	VANE	1.33	-40° → 90°	50	80	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN DEFLECTED-SLIPSTREAM MODEL. PROPELLERS OVERLAPPED. TURNING EFFECTIVENESS OF LARGE-CHORD SLOTTED FLAPS. FORWARD-SPEED TEST WITH INBOARD PROPELLER ONLY. EFFECTS OF VANE AND WING INCIDENCE ON TURNING EFFECTIVENESS. COMPARISON OF TURNING EFFECTIVENESS AND PITCHING MOMENTS OF WING WITH PLAIN FLAPS VS SLOTTED FLAPS. EFFECT OF PROPELLER BLADE ANGLE ON STATIC CONDITION.
47	4.88	NACA 4415	SLIDING, SLOTTED	.60 .30	2	3	2	LE SLAT	1.33	0	4.8	-	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. PROPELLERS OVERLAPPED. EFFECTS OF FLAP DEFLECTION, GROUND PROXIMITY, LE SLAT, END PLATES, AND MODE OF PROPELLER ROTATION. EFFECT OF ATTITUDE OF THRUST AXIS TO GROUND PLANE FROM 0 TO 20°.
48	4.88	NACA 0015	SLOTTED	.60 .30	3	3	2.1	VANE	1.33	0	4.8	-	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. PROPELLERS OVERLAPPED. EFFECTS OF GROUND PROXIMITY AND PROPELLER POSITION ON TURNING EFFECTIVENESS OF WING WITH LARGE-CHORD SLOTTED FLAPS. TUFT STUDIES DISCUSSED. GROUND EFFECT ON ISOLATED PROPELLER THRUST. WING INCIDENCE VARIED. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE.

TABLE 9.2-A. (CONT'D)

REFERENCE NO.	CONFIGURATION GEOMETRY										TEST CONDITIONS					TEST DATA					COMMENTS											
	YEAR OF PUBLICATION	WING ASPECT RATIO	WING AIRFOIL SECTION	TYPE OF FLAP	FLAP CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTION)	PROPPELLER DIAMETER (IN)	BLADES PER PROPPELLER	NUMBER PROPPELLERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPPELLER DIAMETER WING CHORD	MAX. ADVANCE RATIO RANGE	SLIPSTREAM DYNAMIC PRESSURE (LB/FT ²)	SLIPSTREAM REYNOLDS NUMBER (BASED ON WING MAC)	STATIC TURNING EFFECTS	GROUND EFFECTS	PROPPELLER FORCES	PROPPELLER LOCATION	PROPPELLER ROTATION	PROPPELLER ROTATION MODE	PROPPELLER RPM		SLIPSTREAM DIA. PRESS. SURVEY	DOWNWARD SURVEY	POWER								
																									4.55	4.55	2.87	4.89	7.66	-	5.42	5.24
49			NACA 0015	PLAIN	.60 .30	2.0	3	2.1	2 VANES	1.33	-	8	.80	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SEMI-SPAN MODEL, TILT-WING AND DEFLECTED-SLIPSTREAM CONFIG. PROPPELLERS OVERLAPPED. TURNING VANES ABOVE NOSE OF FIRST FLAP. EFFECT OF NO. OF PROPPELLERS ON AERO CHAR. OF SLIPSTREAM NOT STUDIED. EFFECT OF VANE SLIPSTREAM MOMENTS, PERFORMANCE CALCULATIONS. EFFECT OF VANE.
50			NACA 0015	SLOTTED	.60 .30	2.0	3	2.1	LE SLAT	1.33	0	4.8	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SEMI-SPAN MODEL, PROPPELLERS OVERLAPPED. EFFECT OF LE SLAT AS A LONG CONTROL DEVICE. SLAT POSITION VARIED. EFFECTS OF PROPPELLER LOCATION, EFFECTS OF ONE AND TWO PROPPELLERS IN GROUND-EFFECT REGION COMPARED. TUFT STUDIES DISCUSSED. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE.	
51			NACA 4415	SLIDING, PLAIN	.50 .25	2.0	-	1	LE SLAT, END PLATE	1.33	0	4.8	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SEMI-SPAN MODEL, TURNING EFFECTIVENESS OF A WING EQUIPPED WITH A SLIDING FLAP AND A LE SLAT. EFFECT OF SLIDING FLAP ON PITCHING MOMENTS. COMPARISON OF CHAR. OF SLIDING-FLAP WING AND SLOTTED-FLAP WING OF REF 48 AND 49. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE.	
53			NACA 4415	SLIDING, SLOTTED	.50 .30	2.0	-	2	LE SLAT	1.33	1.5	4.8	.62	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SAME MODEL AS REF 47. AERO CHAR. OF HYPOTHETICAL VERTICAL MODEL, EFFECTS OF LE SLAT AND HORIZONTAL STABILIZER. NO CORRECTION FOR TUNNEL-WALL EFFECTS.	
54			NACA 4415	SLIDING, FOWLER (SLOTTED)	.40	2.0	3	2.1	LE SLAT	1.67	1.10	8	.63	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SEMI-SPAN MODEL, NO PROPPELLER OVERLAP. SAME MODEL AS REF 40. LONG AERO CHAR. OF TILT-WING, DEFLECTED-SLIPSTREAM CONFIG. PROPPELLER-ALONE AND WING-ALONE DATA. EFFECTS OF FLAP DEFLECTION, ADVANCE RATIO, ANGLE OF ATTACK, AND DOWNWASH. TEST PERFORMANCE OF HYPOTHETICAL AIRPLANE. APP ON CHAR. OF 1/4-FT SECTION OF LONGLEY 300-MPH 7 x 10-FT TUNNEL.	
56			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	WING LIFTING-SURFACE THEORY WITH INCLINED SLIPSTREAMS. INCLINED ACTUATOR DISC DOWNWARD SURVEY. DOWNWASH CORRECTION TO LONGLEY. COMPARED WITH TEST DATA. SLIPSTREAM DOWNWASH. GROUND EFFECTS. TURNING VANES. EFFECTS OF TURNING VANES ON DOWNWASH. ANGLE DESIGN CHARTS FOR 2-SLIPSTREAM AND 4-SLIPSTREAM CONFIG. AT VARIOUS DOWNWASH ANGLE OF ATTACK, FLAP DEFLECTION, ADVANCE RATIO, ANGLE OF ATTACK, AND THRUST COEFFICIENT.	
58			NACA 4415	DOUBLE SLOTTED	.40	2	3	1	-	1.55	-	7.5	.65	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	DEFLECTED-SLIPSTREAM, WING BODY STOL. MODEL IN LANGLEY 300-MPH 7 x 10-FT TUNNEL. EFFECT OF TAIL AREA, TAIL HEIGHT, THRUST, AND TAIL INCIDENCE ON LONG AERO CHAR.	
59			NACA 4415	-	-	9.5	3	1	LE SLAT, LE DROOP	2.0	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	WIND-TUNNEL TEST ON PROPPELLER-WING-FLAP MODEL USED IN DEFLECTED-SLIPSTREAM STOL AIRCRAFT. EQUATIONS FOR EST AERO FORCES AND COMPARISON WITH TEST DATA.	
61			NACA 4415	-	-	3.5	4	2	BLC	1.187	-	2	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	VZ3 TILT-WING IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF SLATS, NOSE DROOP, AND WING INCIDENCE ON AERO CHAR. TUFT STUDIES. STILL DIAGRAMS.	
62			NACA 0015	SLOTTED	.50 .30	2.0	4	2	-	1.187	-	2	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	LARGE FULL-SCALE MODEL (12-FT SPAN). NO PROPPELLER OVERLAP. MOBILE TEST RIG. EFFECTS OF BLOWING OVER NOSE OF REAR FLAP (.30C). GROUND-PROXIMITY EFFECTS OVER FIXED AND MOVING GROUND. α VARIED FOR FORWARD-SPEED TESTS. THRUST MEASURED. POWER RATIO GIVEN.
63			NACA 60-318	DOUBLE SLOTTED	.47	1.72	4	2	LE SLAT	1.81	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	1/8-SCALE TILT-WING VSTOL IN LANGLEY FULL-SCALE TUNNEL. PROPPELLERS OVERLAPPED. FREE-FLIGHT TESTS IN HOVERING, FORWARD LEVEL FLIGHT, AND DESCENT AT VARIOUS ANGLES OF DESCENT AND WING INCIDENCES, AS WELL AS FORCE TESTS. EFFECTS OF GROUND PROXIMITY.
64			(a) 6.71 (b) 6.52 (c) 6.06	TRIPLE SLOTTED	~.24	9.3	3	2	LE SLAT	(a) 1.19 (b) 1.17 (c) 1.17	-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	LARGE-SCALE DEFLECTED-SLIPSTREAM STOL IN AXES 45° ± 50° ± 50°. 8-FT TUNNEL. NO PROPPELLER OVERLAP. 3 WING SPAN EFFECTS ON DOWNWASH. DOWNWASH CORRECTION TO LONGLEY. EFFECTS OF DEFLECTION, SLATS, PROPPELLER ROTATION DIRECTION, AND SPANWISE VARIATION OF PROPPELLER THRUST.

TABLE 9.2-A (CONT'D)


REFERENCE NO.	CONFIGURATION GEOMETRY										TEST CONDITIONS					TEST DATA					COMMENTS		
	YEAR OF PUBLICATION	WING ASPECT RATIO	WING AIRFOIL SECTION	TYPE OF FLAP	FLAP CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTED)	PROPPELLER DIAMETER (IN)	BLADES PER PROPPELLER	NUMBER PROPPELLERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPPELLER DIAMETER WING CHORD	WING CHORD RANGE	MAX. ADVANCE RATIO	SLIPSTREAM DYNAMIC PRESSURE (LB/FT ²)	SLIPSTREAM REYNOLDS NUMBER BASED ON WING MAC	STATIC TURNING EFFECTIVENESS	GROUND EFFECTS	PROPPELLER LOCATION	PROPPELLER ROTATION MODE	PROPPELLER RPM	SLIPSTREAM DYN. PRESS. SURVEY		DOWNWASH SURVEY	POWER
65	4.58	NACA 0015	-	-	1.167	3	1	-	1.76	0-90°		0.644	9-14	X	X	X	X	X	X	X	X	X	TILT-WING ASSAULT TRANSPORT MODEL IN OPEN-END TUNNEL TO GET STAB DERIVS FOR ED OF MOTION, PROPPELLER EFFECTS DURING HOVER AND TRANSITION.
66	4.74	NACA 4415	SINGLE SLOTTED	.34	9.67	3	1	DROOPED LE	1.84				X	X	X	X	X	X	X	X	X	X	FLIGHT TEST OF VZ-2 TILT-WING VTOL IN LANGLEY FULL-SCALE TUNNEL. FULL SPAN AILERONS EFFECT OF FULL SPAN FLAPS ON RATE OF DESCENT. GROUND EFFECTS.
67	8.53	NACA 63315	DOUBLE SLOTTED	.33	1.55	4	2	LE SLAT	1.92		VARIABLES			X	X	X	X	X	X	X	X	X	1/10-SCALE TILT-WING MODEL IN PRINCETON DYNAMIC MODEL TRACK. SAME AS LTV XC-142A OF REF 13 WITH LE SLATS ADDED. PROPPELLERS OVERLAPPED. GROUND HEIGHT, THRUST COEFF, WING INCIDENCE, FLAP DEFLECTION, AND HORIZONTAL VELOCITY VARIED. LIFT, DRAG, PITCHING MOMENT IN STOL TAKE-OFF AND LANDING. COMPARISON OF WIND TUNNEL AND MOVING-BELT TESTS.
68	8.53	NACA 63318	DOUBLE SLOTTED	.33	1.55	4	2	LE SLAT	1.92					X	X	X	X	X	X	X	X	X	1/10-SCALE TILT-WING VISTOL OF XC-142A IN PRINCETON DYNAMIC MODEL TRACK. PROPPELLERS OVERLAPPED. LAT. DIR. DYNAMIC STAB CHAR IN DESCENT CONDITION. TIME HISTORIES OF RESPONSE TO VARIATIONS IN PROPPELLER PITCH, FUSELAGE PITCH ATTITUDE, DESCENT ANGLE VELOCITY, AND DEGREES OF FREEDOM.
69	8.52	NACA 63A418	TRIPLE SLOTTED	.385	14.76	3	2	-	1.21					X	X	X	X	X	X	X	X	X	FLIGHT TEST OF BREQUET 941 PROTOTYPE ASSAULT TRANSPORT (DS) NO. PROPPELLER OVERLAP INTERCONNECTED PROPPELLERS STOL PERFORMANCE. HANDLING QUALITIES AND OPERATIONAL TECHNIQUES. LIFT AND DRAG AT VARIOUS THRUST COEFFICIENTS IN TAKE OFF, LANDING, AND WAVE-OFF CONFIGURATIONS.
70	10.08	NACA 64A318 (ROOT), 64A312 (TIP)	SINGLE SLOTTED	.75	13.5	4	2	BLOWING BLC, DROOPED AILERONS	.985	-8°-12°				X	X	X	X	X	X	X	X	X	FLIGHT TESTS OF MODIFIED LOCKHEED C-130B (DS). NO PROPPELLER OVERLAP. STOL PERFORMANCE. HANDLING QUALITIES AND OPERATIONAL TECHNIQUES. LIFT, DRAG, INCLUDING EFFECT OF BLC IN TAKE-OFF AND LANDING.
71	4.78	MOD NACA 4415	SINGLE SLOTTED	.33	2.33	3	1	KRUGER-FLAP	1.79					X	X	X	X	X	X	X	X	X	FLIGHT TESTS OF 1/4-SCALE VZ-2 TILT-WING VTOL IN LANGLEY FULL-SCALE TUNNEL. TIME HISTORIES AND PILOT RATINGS OF DYNAMIC LATERAL CONTROL IN DESCENT.
72	2.67	NACA 4415	SLOTTED PLAIN	.67	2.0	-	1	BLC	1.33	0	4.8			X	X	X	X	X	X	X	X	X	SEMISPAN MODEL EFFECTIVENESS OF BLOWING A JET SHEET OF AIR OVER A PLAIN REAR FLAP COMBINED WITH A SLOTTED FORWARD FLAP IN DEFLECTING PROPPELLER SLIPSTREAM DOWNWARD. AIR EXHAUSTED OVER REAR FLAP ONLY. EFFECTS OF GROUND PROXIMITY, BLOWING SYSTEM CHARACTERISTICS. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE.
73	7.0	NACA 63A412	SLIDING, EXTENSION	.385	1.33	3	2	BLC	1.0	-30°-90°	6			X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. NO PROPPELLER OVERLAP. PROPPELLERS DO NOT SPAN ENTIRE WING. NO DATA ANALYSIS. AERO CHAR OF JET-FLAPPED AND DEFLECTED SLIPSTREAM CONFIG. PRESS SURVEY DATA. EFFECT OF GROUND PROXIMITY FOR STATIC AND FORWARD-SPEED CONDITIONS.
74	2.67	NACA 4415	SLIDING PLAIN	.50	2.0	-	1	LE SLAT, BLC END PLATE	1.33	0	4.8			X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. EFFECTIVENESS OF BLOWING A JET OF AIR OVER FLAPS IN DEFLECTING PROPPELLER SLIPSTREAM DOWNWARD. EFFECTS OF LE SLAT, GROUND PROXIMITY, END PLATE, AND PROPPELLER POSITION. BLOWING SYSTEM CHAR. RATIO OF RESULTANT FORCE OBTAINED BY BLOWING VS THAT OBTAINED BY USING EQUAL POWER IN THE PROPPELLER. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE.
75	4.0	NACA 4415	PLAIN	.60	2.0	-	1	BLC	2.00	0	4.8	.39, .47, .59		X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. EFFECTS OF PROPPELLER DIAMETER ON ABILITY OF FLAPPED WING, WITH AND WITHOUT BLC TO DEFLECT PROPPELLER SLIPSTREAM DOWNWARD. BLOWING SYSTEM CHAR. EFFECTS OF GROUND PROXIMITY. 20° ANGLE BETWEEN THRUST AXIS AND GROUND PLANE. R _f VARIES WITH PROPPELLER DIAMETER.

TABLE 9.2-A (CONTD)

REFERENCE NO.	YEAR OF PUBLICATION		WING ASPECT RATIO	WING AIRFOIL SECTION		TYPE OF FLAP	WING CHORD TO AIRFOIL CHORD RATIO (FLAP RETRACTED)		PROPPELLER DIAMETER (IN)	BLADES PER PROPPELLER	NUMBER PROPPELLERS PER SEMISPAN	AUXILIARY TURNING AIDS	PROPPELLER DIAMETER WING CHORD		MAX. ADVANCE RATIO	SLIPSTREAM DYNAMIC PRESSURE (LB/FT ²)	SLIPSTREAM REYNOLDS NUMBER (BASED ON WING MAC)	STATIC TURNING EFFECTIVENESS	GROUND EFFECTS	PROPPELLER FORCES	PROPPELLER LOCATION VARIED	PROPPELLER RPM	SLIPSTREAM DYN PRESS. SURVEY	DOWNWASH SURVEY	POWER	COMMENTS
	(a)	(b)		(a)	(b)		(a)	(b)					(a)	(b)												
76	(a) 4.82 (b) 7.36 (c) 12.31	(a) NACA 4415 (b) NACA 4424	-	(a) SINGLE (b) SLOTTED (c) SLOTTED	(a) 4.0 (b) - (c) -	2.0	1	1	LE SLAT	(a) 2.8 (b) 4.8 (c) 8	0 → 10°	8	(a) 360 (b) 278 (c) 131	X	X	X	X	X	X	X	X	X	X	X	X	3 SEMISPAN TILT-PROPELLER VTOL MODELS IN LANGLEY 300-MPH 7. x 10-FT TUNNEL. EFFECT OF WING-CHORD-TO-PROPPELLER-DIAMETER RATIO, PROPPELLER ROTATION DIRECTION, EFFECT OF WING CHORD INCIDENCE, THRUST COEFF. AND LAG EFFECTS ON PROPELLER ROTATION DIRECTION, WING CHORD TO-PROPPELLER RATIO, PROPELLER INCIDENCE, AND LE SLAT ON POWER REQUIRED, PITCHING MOMENT, AND THRUST ANGLE OF ATTACK, TRANSITION REGIME.
79	(a) 7.5 (b) 6.0 (c) 5.33	NACA 0015	-	-	-	2.0	1	1	LE SLAT	2.96	-10° → 110°	8	(a) 362 (b) 53 (c) 795	X	X	X	X	X	X	X	X	X	X	X	X	SEMISPAN MODEL. EFFECT OF CHANGES IN WING CHORD AND LE SLATS ON LONG AERO CHAR. OF WING-PROPPELLER TILT-WING CONFIG. TUFT-GRID PHOTOGRAPHS. PROPPELLER EFFICIENCY, β VARIES WITH WING CHORD.
80	2.82	NACA 0015	-	-	-	2.0	3	1	-	1.33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TILT WING ON PRINCETON DYNAMIC MODEL TRACK (PROPPELLER + NACELLE). AERO CHAR IN TRANSITION AND HOVER. GRAPHS OF LIFT, HORIZ FORCE, AND PITCHING MOMENT VS THRUST FOR VARIOUS WING ANGLES.	
82	5.64	NACA 23017	-	SINGLE SLOTTED	-	4.77	3	2	B.L.C. LE SLAT	.82	-28° → 28°	-	-	-	-	-	-	-	-	-	-	-	-	-	LARGE SCALE TILT-WING. DEFLECTED-SLIPSTREAM VTOL. NO PROPPELLER OVERLAP. WING FLOW PATTERNS FROM PHOTOGRAPHS. EFFECTS OF WING TILT, FLAPS, SLATS, PROPPELLER ROTATION DIRECTION, AND ON AERO CONTROL. DEVICES ON BUFFET BOUNDARY AND DESCENT CHAR.	
83	5.54	NACA 23017	-	SINGLE SLOTTED	-	4.77	3	2	L.C. SLAT B.L.C. NOSE B.L.C. LE SLAT	.82	-28° → 28°	-	-	-	-	-	-	-	-	-	-	-	-	-	LARGE SCALE TILT-WING. DEFLECTED-SLIPSTREAM VTOL. NO PROPPELLER OVERLAP. WING FLOW PATTERNS FROM PHOTOGRAPHS. EFFECTS OF WING TILT, FLAPS, SLATS, PROPPELLER ROTATION DIRECTION, AND ON AERO CONTROL. DEVICES ON BUFFET BOUNDARY AND DESCENT CHAR.	
84	5.0	NACA 23071	-	FOWLER	.40	15.17	3	1	LE SLAT. DROOPED LE	2.21	0 → 90°	-	-	-	-	-	-	-	-	-	-	-	-	-	TILT-WING MODIFIED GRUMMAN JRF-5 VTOL. IN AMES 40 x 80-FT TUNNEL. GROUND TEST STAND. EFFECTS OF WING TILT, FLAPS, BLADE FLAP DEFLECTION, VELOCITY, AND LAG ON WING LIFT AND CHAR IN TRANSITION. TUFT STUDIES. EFFECT OF ROTOR CYCLIC CONTROL ON LONG AND LATERAL CHAR.	
85	(a) 5.04 (b) 7.84	-	-	SINGLE SLOTTED	.30	1.833	3	1	-	(a) 1.95 (b) 2.40	0 → 90°	-	-	-	-	-	-	-	-	-	-	-	-	-	SEMISPAN TILT WING AND FUSELAGE. EFFECTS OF FLAP DEFLECTION, THRUST COEFFICIENT, AND NACELLE SHAPE ON AERO CHAR.	

9.2.1 PROPELLER-WING-FLAP LIFT VARIATION WITH POWER AND ANGLE OF ATTACK

The methods for calculating power-on lift and drag forces of tilt-wing and deflected-slipstream configurations are those developed by Kuhn in reference 1. The methods treat the flow system of a propeller-wing-flap configuration as two separate mass flows, each deflected through a different angle by the wing. The two mass flows are (1) the mass flow deflected downward by the wing through small to moderate angles and (2) the mass flow in slipstreams created by the action of the propellers and deflected downward through large angles by either tilting the thrust axis or deflecting the flaps. These flow systems are illustrated in sketch (a).

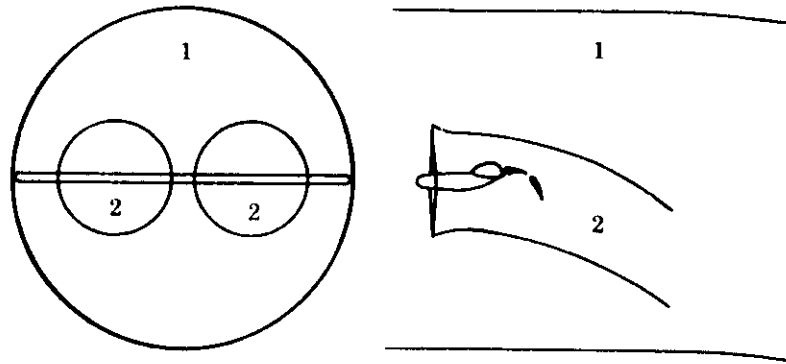

SKETCH (a)

The forces generated in deflection of these mass flows are the familiar lift, induced drag, and profile drag of a wing in a free stream; the propeller thrust which accelerates the propeller slipstream; and a force which accounts for deflection of the propeller slipstream by the wing. Kuhn has analyzed the forces arising from the deflection of each mass flow separately and combined them to arrive at a semiempirical method based on simple momentum theory to estimate the lift and drag forces of propeller-wing-flap configurations. The method uses static slipstream deflection data and power-off wing-flap data as the basis for the calculations.

Kuhn develops expressions for both the lift and drag forces in cruising and high-speed flight by neglecting the forces due to the propeller slipstream and treating the deflection of the mass flow affected by the wing within the assumption of simple momentum theory. Using this assumption at very low cruising speeds requires that the stream tube be deflected through large angles with a minimum loss in order to produce enough lift to support the airplane. Although the validity of extrapolation of simple momentum theory to large angles appears to be a rather gross assumption, the theory gives reasonable results as long as stall can be avoided.

At zero forward speed, only the propeller slipstreams are available to produce thrust and lift. At this end of the speed range Kuhn develops expressions for the lift and drag forces from available static experimental data on the effectiveness of wing-flap systems in deflecting propeller slipstreams. These expressions are presented in terms of propeller thrust, slipstream characteristics, and the turning effectiveness parameters θ and $\frac{F}{T}$. The slipstream characteristics are obtained using simple momentum theory as applied to propellers.

At transition speeds both flow regions are considered. The resulting expressions approach the power-off wing expressions as velocity is increased and thrust reduced to zero, and approach the zero-forward-speed expressions as the speed is reduced to zero. The method thus provides a logical means of interpolating between these end points.

In treating the flow in the two systems, the fact that the propeller slipstreams occupy space within the large wing stream tube is compensated for by assuming the propeller slipstream to be fully contracted at the wing and that the contraction does not alter the diameter of the stream tube affected by the wing.

To determine the velocity increments necessary to calculate momentum changes, Kuhn assumes that the propeller slipstreams are deflected through the turning angle θ obtained at zero forward speed, that the stream tube affected by the wing is deflected through the downwash angle ϵ obtained under power-off conditions, and that both θ and ϵ remain constant with changes in speed and power.

In order to apply the Datcom methods, it is necessary to have experimental results for or to be able to estimate power-off lift and drag-force characteristics of the wing, as well as slipstream deflection characteristics of the propeller-wing-flap configuration at zero forward speed. The slipstream deflection characteristics for a given propeller-wing-flap configuration require experimental static-thrust data, which will more than likely not be available during the preliminary design phase. Therefore design charts, taken from reference 1, for the slipstream deflection characteristics are provided.

The method presented in this Section is for estimation of the lift of propeller-wing-flap configurations at combined forward speed and power-on conditions. The method is applicable only in the unstalled region of flight.


DATCOM METHOD

The lift of a propeller-wing-flap configuration at combined forward speed and power-on conditions is given in reference 1 as

$$C_L'' = C_{L_0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_p}{S} \sin(\theta + \alpha) \left[1 + 1.6 (1 - T_c'')^{1/2} \right] \quad 9.2.1-a$$

where all the parameters are defined in the general notation list of Section 9.2. The coefficients, except for C_{L_0} , are based on the dynamic pressure in the propeller slipstream, and the positive direction of forces and angles is shown in Figure 9.2-6.

The first term of equation 9.2.1-a represents the power-off lift contribution. The last term represents both the direct propeller thrust contribution and the lift augmentation of the wing due to the propeller slipstream. The significance of these terms is illustrated in sketch (b).

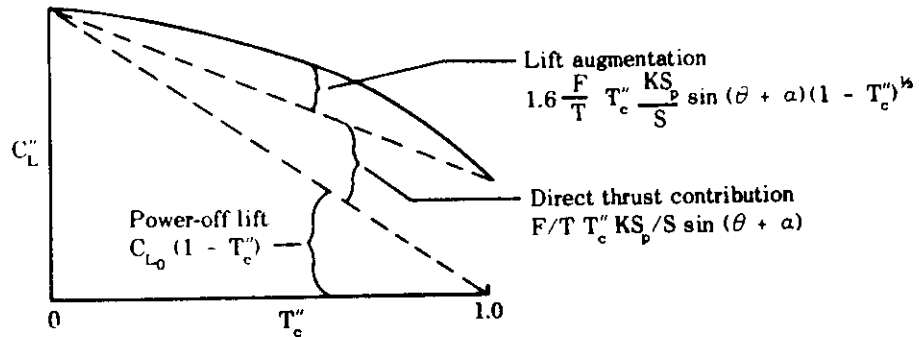

SKETCH (b)

The procedure to be followed in evaluating equation 9.2.1-a is outlined in the following steps.

Step 1. Determine the slipstream turning angle θ by

$$\theta = \theta_f + \Delta\theta \quad 9.2.1-b$$

where

θ_f is the slipstream turning angle under conditions of zero incidence and zero camber

$\Delta\theta$ is the slipstream turning-angle increment due to wing camber and incidence between the wing-chord plane and the thrust axis

θ_f is obtained by


$$\theta_f = \frac{\theta}{\delta} \delta \quad 9.2.1-c$$

where $\frac{\theta}{\delta}$ is obtained from figure 9.2.1-18a as a function of the ratio of the total extended flap chord to the propeller diameter $\frac{c_f}{D}$, and δ is the total flap deflection. For a multiple-flapped configuration the total flap deflection is the sum of the flap deflection of each individual flap.

$\Delta\theta$ is obtained by

$$\Delta\theta = \frac{\theta}{\delta} \delta_e \quad 9.2.1-d$$

where $\frac{\theta}{\delta}$ is obtained from Figure 9.2.1-18a as a function of the ratio of the wing chord to the propeller diameter $\frac{c}{D}$, and δ_e is an equivalent flap deflection angle defined as the angle between the thrust axis and the mean camber line at the wing trailing edge (see sketch (c)).

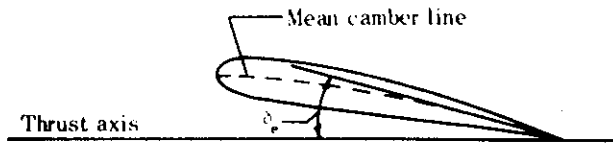

SKETCH (c)

In using this procedure to determine the slipstream turning angle, it is necessary that the value be obtained over the linear part of the curve of variation of turning angle with flap deflection.

In order to define the region of linearity for a given flap configuration, a curve of the variation of the maximum turning angle θ_{\max} with the ratio of the total flap chord to the propeller diameter $\frac{c_f}{D}$ is given as figure 9.2.1-18b. A comparison of Figures 9.2.1-18a and 9.2.1-18b indicates that the slope $\frac{\theta}{\delta}$ is dependent only on the total flap chord; whereas the maximum turning angle is dependent upon both the total flap chord and the type of flap. The slope $\frac{\theta}{\delta}$ will become nonlinear as θ_{\max} for a given flap configuration is approached. For the purpose of the Datcom the range of the linear variation of θ with δ is defined as

$$\frac{\theta_f}{\theta_{\max}} \leq 0.95$$

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$ from figure 9.2.1-19 as a function of the turning angle θ (obtained in Step 1), the flap configuration, and the propeller arrangement.

Step 3. Determine the power-off lift coefficient C_{L_0} .

A wing which is stalled in the power-off condition would frequently be unstalled at some moderate to high propeller thrust coefficient. In order to estimate the power-on data in this region, it is necessary to use the lift values that would exist if the wing were unstalled in the power-off condition. Where possible, experimental power-off data should be used and extrapolated for this purpose. Under these conditions the power-off lift coefficient can be estimated by

$$C_{L_0} = C_{L_{\alpha_0}} 57.3 \sin (\alpha - \alpha_0) \quad 9.2.1-e$$

where $C_{L_{\alpha_0}}$ is the extrapolated power-off lift-curve slope of the wing-flap configuration, per degree, and α_0 is the extrapolated power-off zero-lift angle of attack.

If power-off data for the given configuration are not available or if the power-off data do not exhibit any region of unstalled flow, the following procedure can be used:

- (a) Determine the unflapped wing zero-lift angle of attack from Section 4.1.3.1.
- (b) Determine the wing-flap incremental lift from Section 6.1.4.1.
- (c) Determine the power-off lift-curve slope of the flapped wing from Section 6.1.4.2.
- (d) Using the parameters determined in (a), (b), and (c) construct the power-off lift curve of the flapped wing to obtain α_0 .
- (e) The power-off lift coefficient of the flapped wing at angle of attack is then obtained using equation 9.2.1-e.

Step 4. The propeller thrust coefficient T_c'' will usually be specified; however, if necessary this parameter can be estimated using the method of Section 9.1.1. (Note that $T_{c9.2.1} = T_{c9.1.1} \frac{S_p}{S}$, and $T_c'' = \frac{T_{c9.1.1}}{T_{c9.1.1} + K}$.)

Step 5. The lift coefficient is then obtained from equation 9.2.1-a.


The sample problems illustrate the use of the Datcom method in estimating the lift coefficients of both deflected-slipstream and tilt-wing configurations.

Comparison of experimental data, in the unstalled flight regime, with calculations made using the Datcom method is presented for deflected-slipstream and tilt-wing configurations in Table 9.2.1-A.

Sample Problems

1. Deflected-Slipstream Configuration

Given: A propeller-wing-flap deflected-slipstream configuration of reference 2.

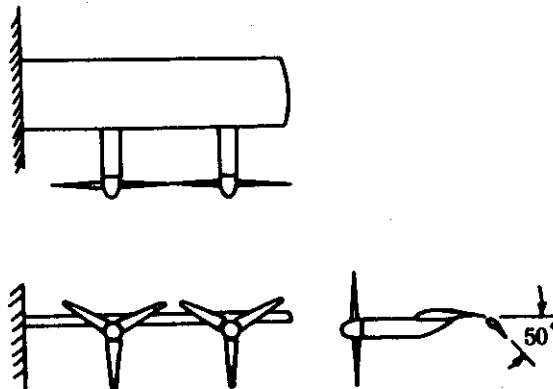

Wing Characteristics

$$S = 10.96 \text{ sq ft}$$

$$A = 7.66$$

NACA 4415 airfoil section

$$i_w = 0^\circ$$

$$c = 1.2 \text{ ft (flap retracted)}$$

$$c = 1.68 \text{ ft (Fowler flap extended)}$$

Flap Characteristics

$$\text{Fowler flap} \quad \frac{c_f}{c} = 0.286 \text{ (flap extended)} \quad \delta = 50^\circ$$

Propeller Characteristics

$$K = 4 \text{ (2 propellers per semispan, no overlap)} \quad D = 2.0 \text{ ft}$$

$$S_p = 3.14 \text{ sq ft}$$

Additional Characteristics

$$T_c'' = 0.90 \quad \delta_e = 7.4^\circ$$

Compute:

Step 1. Determine the slipstream turning angle θ .

$$\begin{aligned} \frac{c_f}{D} &= \frac{c_f}{c} \cdot \frac{c}{D} = (0.286) \left(\frac{1.68}{2.0} \right) \\ &= 0.24 \end{aligned}$$

$$\frac{\theta}{\delta} = 0.50 \text{ (figure 9.2.1-18a at } \frac{c_f}{D} = 0.24)$$

$$\begin{aligned} \theta_f &= \frac{\theta}{\delta} \delta = (0.50)(50) \text{ (equation 9.2.1-c)} \\ &= 25^\circ \end{aligned}$$

Assuming the wing to be a large-chord flap

$$\frac{c}{D} = \frac{1.2}{2.0} = 0.60$$

$$\frac{\theta}{\delta} = 0.803 \text{ (figure 9.2.1-18a at } \frac{c}{D} = 0.6)$$

$$\begin{aligned} \Delta\theta &= \frac{\theta}{\delta} \delta_e = (0.803)(7.4) \text{ (equation 9.2.1-d)} \\ &= 5.94 \end{aligned}$$

$$\begin{aligned} \theta &= \theta_f + \Delta\theta = 25 + 5.94 \text{ (equation 9.2.1-b)} \\ &= 30.94^\circ \end{aligned}$$

Determine if the $\frac{\theta}{\delta}$ value for this wing-flap configuration is in the linear range.

$$\theta_{\max} = 26.5^\circ \quad (\text{figure 9.2.1-18b at } \frac{c_f}{D} = 0.24)$$


$$\frac{\theta_f}{\theta_{\max}} = \frac{25}{26.5} = 0.943 \quad \text{which is within the range of the linear variation of } \theta \text{ with } \delta \text{ as defined by the Datcom.}$$

Step 2. Determine the thrust-recovery $\frac{F}{T}$.

$$\frac{F}{T} = 0.96 \quad (\text{figure 9.2.1-19})$$

Step 3. Determine the power-off lift coefficient C_{L_0} .

The experimental power-off lift curve is extrapolated to obtain

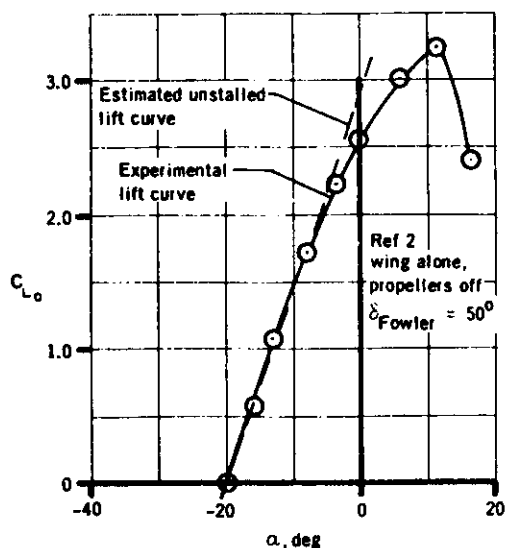

$$\alpha_0 = -20^\circ$$

$$C_{L_{\alpha_0}} = 0.145 \text{ per deg}$$

The lift curve that would exist if the wing were unstalled in the power-off condition is estimated by

$$C_{L_0} = C_{L_{\alpha_0}} 57.3 \sin(\alpha - \alpha_0) \quad (\text{equation 9.2.1-e})$$

α deg	$(\alpha - \alpha_0)$ deg	$\sin(\alpha - \alpha_0)$	C_{L_0}
-20	0	0	0
-10	10	0.1736	1.442
0	20	0.3420	2.842
10	30	0.5000	4.154
20	40	0.6428	5.341

Solution:

$$C_L'' = C_{L_0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_D}{S} \sin(\theta + \alpha) \left[1 + 1.6(1 - T_c'')^{1/2} \right] \quad (\text{equation 9.2.1-a})$$

$$= C_{L_0} (1 - 0.9) + (0.96)(0.9) \frac{(4)(3.14)}{(10.96)} \sin(\theta + \alpha) \left[1 + 1.6(1 - 0.9)^{1/2} \right]$$


$$= 0.10 C_{L_0} + 1.491 \sin(\theta + \alpha)$$

①	②	③	④	⑤	⑥	⑦
α deg	C_{L_0}	$(\theta + \alpha)$ deg	$\sin(\theta + \alpha)$ sin ③	$0.10 C_{L_0}$ 0.10 ②	1.491 ④	$C_{L''}$ ⑤ + ⑥
-20	0	10.94	0.1898	0	0.2830	0.2830
-10	1.442	20.94	0.3574	0.1442	0.5329	0.6771
0	2.842	30.94	0.5141	0.2842	0.7665	1.0507
10	4.154	40.94	0.6553	0.4154	0.9771	1.3925
20	5.341	50.94	0.7764	0.5341	1.1576	1.6917

These results are compared with experimental data in table 9.2.1-A.

2. Deflected-Slipstream Configuration

Given: A propeller-wing-flap deflected-slipstream configuration of reference 2.

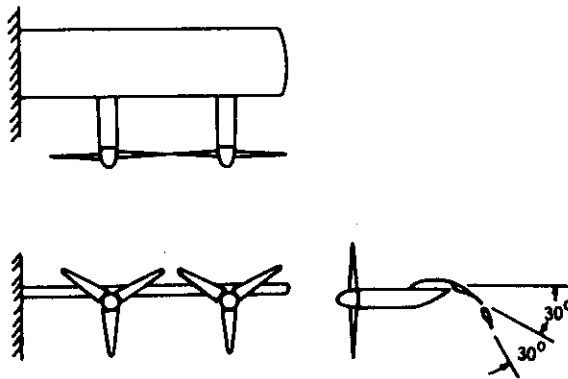

Wing Characteristics

$S = 10.96$ sq ft $A = 7.66$ NACA 4415 airfoil section

$i_w = 0$ $c = 1.2$ ft (flaps retracted)

$c = 1.68$ ft (sliding flap and Fowler flap extended)

Flap Characteristics

Combination sliding and Fowler flap

$\frac{c_f}{c} = 0.566$ (sliding flap and Fowler flap extended; effective chord of sliding flap measured to flap knee)

$$\left. \begin{array}{l} \delta_{\text{sliding}} = 30^\circ \\ \delta_{\text{Fowler}} = 30^\circ \end{array} \right\} \delta = \delta_{\text{sliding}} + \delta_{\text{Fowler}} = 60^\circ$$

Propeller Characteristics

$$K = 4 \text{ (2 propellers per semispan, no overlap)} \quad D = 2.0 \text{ ft}$$

$$S_p = 3.14 \text{ sq ft}$$

Additional Characteristics

$$T_c'' = 0.90 \quad \delta_e = 7.4^\circ$$

Compute:

Step 1. Determine the slipstream turning angle θ .

$$\begin{aligned} \frac{c_f}{D} &= \left(\frac{c_f}{c}\right)\left(\frac{c}{D}\right) = (0.566)\left(\frac{1.68}{2.0}\right) \\ &= 0.475 \end{aligned}$$

$$\frac{\theta}{\delta} = 0.72 \text{ (figure 9.2.1-18a at } \frac{c_f}{D} = 0.475)$$

$$\begin{aligned} \theta_f &= \frac{\theta}{\delta} \delta = (0.72)(60) \text{ (equation 9.2.1-c)} \\ &= 43.2^\circ \end{aligned}$$

Assuming the wing to be a large-chord flap

$$\frac{c}{D} = \frac{1.2}{2.0} = 0.60$$

$$\frac{\theta}{\delta} = 0.803 \text{ (figure 9.2.1-18a at } \frac{c}{D} = 0.60)$$

$$\begin{aligned} \Delta\theta &= \frac{\theta}{\delta} \delta_e (0.803)(7.4) \text{ (equation 9.2.1-d)} \\ &= 5.94^\circ \end{aligned}$$

$$\begin{aligned} \theta &= \theta_f + \Delta\theta = 43.2 + 5.94 \text{ (equation 9.2.1-b)} \\ &= 49.14^\circ \end{aligned}$$

Determine if the $\frac{\theta}{\delta}$ value for this wing-flap configuration is in the linear range.

$$\theta_{\max} = 53.5^\circ \text{ (upper curve of figure 9.2.1-18b at } \frac{c_f}{D} = 0.475)$$

$$\frac{\theta_f}{\theta_{\max}} = \frac{43.2}{53.5} = 0.807 \text{ which is within the range of linear variation of } \theta \text{ with } \delta \text{ as defined by the Datcom.}$$

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$.

$$\frac{F}{T} = 0.90 \text{ (figure 9.2.1-19)}$$

Step 3. Determine the power-off lift coefficient C_{L_0} .


The experimental power-off lift curve is extrapolated to obtain

$$\alpha_0 = -35^\circ$$

$$C_{L_{\alpha_0}} = 0.180 \text{ per deg}$$

The lift curve that would exist if the wing were unstalled in the power-off condition is estimated by

$$C_{L_0} = C_{L_{\alpha_0}} 57.3 \sin(\alpha - \alpha_0) \quad \text{(equation 9.2.1-e)}$$

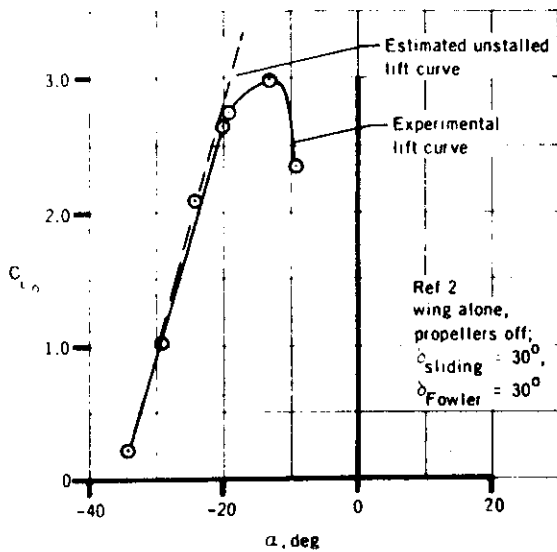

α deg	$\alpha - \alpha_0$ deg	$\sin(\alpha - \alpha_0)$	C_{L_0}
-40	-5	-0.0872	-0.8990
-35	0	0	0
-20	15	0.2588	2.6693
-10	25	0.4226	4.3587
0	35	0.5736	5.9161
10	45	0.7071	7.2930
20	55	0.8192	8.4492

Solution:

$$C_L'' = C_{L_0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_P}{S} \sin(\theta + \alpha) \left[1 + 1.6(1 - T_c'')^{1/2} \right] \quad \text{(equation 9.2.1-a)}$$

$$= C_{L_0} (1 - 0.9) + (0.90)(0.90) \frac{(4)(3.14)}{(10.96)} \sin(\theta + \alpha) \left[1 + 1.6(1 - 0.9)^{1/2} \right]$$


$$= 0.10 C_{L_0} + 1.3978 \sin(\theta + \alpha)$$

① α deg	② C_{L_0}	③ $(\theta + \alpha)$ deg	④ $\sin(\theta + \alpha)$ sin ③	⑤ $0.10 C_{L_0}$ 0.10 ②	⑥ 1.3978 ④	⑦ C_L'' ⑤ + ⑥
-40	-0.8990	9.14	0.1588	-0.0899	0.2220	0.1321
-35	0	14.14	0.2443	0	0.3415	0.3415
-20	2.6693	29.14	0.4869	0.2669	0.6806	0.947
-10	4.3587	39.14	0.6312	0.4359	0.8823	1.318
0	5.9161	49.14	0.7563	0.5916	1.0571	1.649
10	7.2930	59.14	0.8585	0.7293	1.2000	1.929
20	8.4492	69.14	0.9344	0.8449	1.3061	2.151

These results are compared with experimental data in table 9.2.1-A.

3. Tilt-Wing Configuration

Given: The propeller-wing configuration of reference 5.

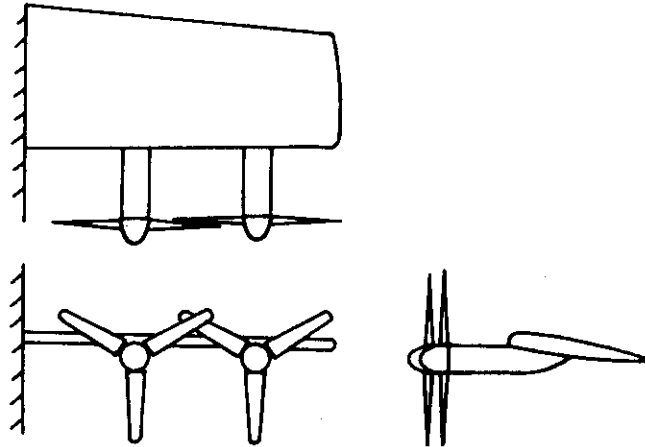

Wing Characteristics

$S = 11.0$ sq ft $A = 4.89$ $i_w = 5^\circ$ NACA 4415 airfoil section
 $c = 1.5$ ft

Propeller Characteristics

$K = 4$ (2 propellers per semispan, overlapped) $D = 2.0$ ft
 $S_p = 3.14$ sq ft

Additional Characteristics

$T_c'' = 0.69$ $\delta_e = 12.4^\circ$

Compute:

Step 1. Determine the slipstream turning angle θ .

$$\theta_f = 0$$

$$\frac{c}{D} = \frac{1.5}{2.0} = 0.75$$

$$\frac{\theta}{\delta} = 0.89 \quad (\text{figure 9.2.1-18a at } \frac{c}{D} = 0.75)$$

$$\begin{aligned} \Delta\theta &= \frac{\theta}{\delta} \delta_e = (0.89)(12.4) \quad (\text{equation 9.2.1-d}) \\ &= 11.0^\circ \end{aligned}$$

$$\theta = \theta_f + \Delta\theta \quad (\text{equation 9.2.1-b})$$


$$= 11.0^\circ$$

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$.

$$\frac{F}{T} = 1.0 \text{ (figure 9.2.1-19)}$$

Step 3. Determine the power-off lift coefficient C_{L_0} .

The experimental power-off lift curve is extrapolated to obtain

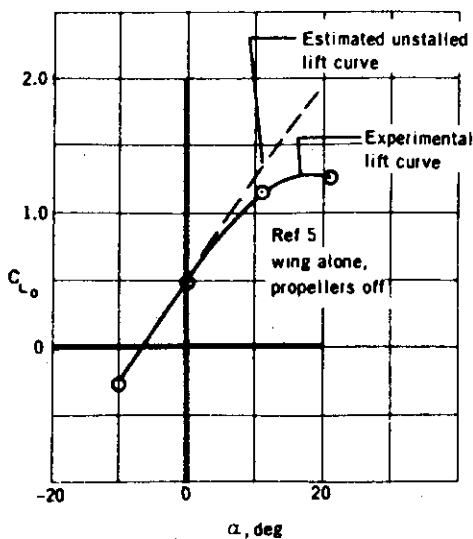

$$\alpha_0 = -6.5^\circ$$

$$C_{L_{\alpha_0}} = 0.075 \text{ per deg}$$

The lift curve that would exist if the wing were uninstalled in the power-off condition is estimated by

$$C_{L_0} = C_{L_{\alpha_0}} 57.3 \sin(\alpha - \alpha_0) \text{ (equation 9.2.1-1)}$$

α deg	$(\alpha - \alpha_0)$ deg	$\sin(\alpha - \alpha_0)$	C_{L_0}
-10	-3.5	-0.0611	-0.2624
-6.5	0	0	0
0	6.5	0.1132	0.4865
10	16.5	0.2840	1.2205
20	26.5	0.4462	1.9175

Solution:

$$C_L'' = C_{L_0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_p}{S} \sin(\theta + \alpha) \sqrt{1 + 1.6(1 - T_c'')} \text{ (equation 9.2.1-a)}$$

$$= C_{L_0} (1 - 0.69) + (1.0)(0.69) \frac{(4)(3.14)}{(11.0)} \sin(\theta + \alpha) \sqrt{1 + 1.6(1 - 0.69)}^{1/2}$$

$$= 0.31 C_{L_0} + 1.4897 \sin(\theta + \alpha)$$

① α deg	② C_{L_0}	③ $(\theta + \alpha)$ deg	④ $\sin(\theta + \alpha)$ sin ③	⑤ $0.31 C_{L_0}$ 0.31 ②	⑥ 1.4897 ④	⑦ C_L'' ⑤ + ⑥
-10	-0.2624	1.0	0.0175	-0.0813	0.0261	-0.0552
-6.5	0	4.5	0.0785	0	0.1169	0.1169
0	0.4865	11.0	0.1908	0.1508	0.2842	0.4350
10	1.2205	21.0	0.3584	0.3784	0.5339	0.9123
20	1.9175	31.0	0.5150	0.5944	0.7672	1.3616

These results are compared with experimental data in table 9.2.1-A.

REFERENCES

1. Kuhn, R. E.: Semiempirical Procedure for Estimating Lift and Drag Characteristics of Propeller-Wing-Flap Configurations for Vertical- and Short-Take-off-and-Landing Airplanes. NASA Memo 1-16-59L, 1959. (U)
2. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of Three Propeller-Driven VTOL Configurations in the Transition Speed Range, Including Effects of Ground Proximity. NASA TN D-55, 1960. (U)
3. Kuhn, R. E., and Draper, J. W.: Investigation of Effectiveness of Large-Chord Slotted Flaps in Deflecting Propeller Slipstreams Downward for Vertical Take-Off and Low-Speed Flight. NACA TN 3364, 1955. (U)
4. Kuhn, R. E., and Draper, J. W.: An Investigation of a Wing-Propeller Configuration Employing Large-Chord Plain Flaps and Large Diameter Propellers for Low-Speed Flight and Vertical Take-Off. NACA TN 3307, 1954. (U)
5. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Effect of Propeller Slipstreams on Aerodynamic Characteristics of a Wing Equipped with a 50-Percent-Chord Sliding Flap and a 30-Percent-Chord Slotted Flap. NACA TN 3918, 1957. (U)

TABLE 9.2.1-A
DATA SUMMARY AND SUBSTANTIATION
PROPELLER-WING-FLAP LIFT COEFFICIENT

Ref.	Configuration Characteristics	T _c "	α deg	C _{L0} *	C _L " Calc	C _L " Test	ΔC _L " (Calc-Test)		
2	Deflected-slipstream configuration Wing S = 10.96 sq ft A = 7.66 Airfoil: NACA 4415 i _w = 0 c/D = 0.60 δ _e = 7.4° Propeller K = 4 (no overlap) D = 2.0 ft Flap Fowler flap c _f /D = 0.24 (flap extended) δ = 50° Additional F/T = 0.96 θ = 30.96°	0.6	-20	0	0.2520	0.34	-0.09		
			-10	1.442	1.0514	1.25	-0.20		
			0	2.842	1.8195	1.90	-0.08		
		0.9	10	4.154	2.5318	2.41	-0.12		
			-20	0	0.2830	0.28	0		
			-10	1.442	0.6771	0.71	-0.03		
		0.95	0	2.842	1.0507	1.07	-0.02		
			10	4.154	1.3925	1.39	0		
			20	5.341	1.6917	1.62	0.07		
		0.95	-20	0	0.2693	0.26	0.01		
			-10	1.442	0.5792	0.59	-0.01		
			0	2.842	0.8716	0.87	0		
			10	4.154	1.1375	1.14	0		
			20	5.341	1.3687	1.35	0.02		
		2	Deflected-slipstream configuration Wing S = 10.96 sq ft A = 7.66 Airfoil: NACA 4415 i _w = 0 c/D = 0.60 δ _e = 7.4° Propeller K = 4 (no overlap) D = 2.0 ft Flap Sliding + Fowler flap c _f /D = 0.475 (flaps extended) δ sliding = 30° δ Fowler = 30° Additional F/T = 0.90 θ = 49.14°	0.6	-40	-0.8990	-0.162	-0.20	0.04
					-20	2.6693	1.674	1.56	0.11
					-10	4.3587	2.529	2.21	0.32
0.9	-40			-0.8990	0.132	-0.05	0.18		
	-20			2.6693	0.947	0.91	0.04		
	-10			4.3587	1.318	1.28	0.04		
0.95	0			5.9161	1.649	1.56	0.09		
	10			7.2930	1.929	1.71	0.22		
	20			8.4492	2.151	1.70	0.45		
0.95	-40			-0.8990	0.166	0.02	0.15		
	-20			2.6693	0.781	0.68	0.10		
	-10			4.3587	1.004	1.0	0		
	0			5.9161	1.302	1.26	0.04		
	10			7.2930	1.506	1.46	0.05		
	20			8.4492	1.665	1.53	0.13		
	30			9.3476	1.773	1.48	0.29		

* Estimated unstalled power-off lift coefficient

TABLE 9.2.1-A (CONTD)

Ref.	Configuration Characteristics	T_c "	α deg	C_{L0}^*	C_L " Calc	C_L " Test	ΔC_L " (Calc-Test)
3	Deflected-slipstream configuration Wing S = 10.25 sq ft A = 4.55 Airfoil: NACA 0015 $i_w = 0$ $\frac{c}{D} = 0.755$ $\delta_e = 0$ Propeller K = 2 D = 2.0 ft Flap Slotted flap $\frac{c_f}{D} = 0.226$ $\delta = 60^\circ$ Additional $\frac{F}{T} = 0.96$ $\theta = 28.2^\circ$	0.5	-20	-0.1600	0.009	0	0.01
			-10	0.6380	0.515	0.50	0.01
			0	1.4165	1.004	1.075	-0.03
			10	2.1522	1.464	1.575	-0.11
			20	2.8224	1.878	1.775	0.10
			30	3.4064	2.236	-	-
		0.71	-20	-0.1600	0.064	0.10	-0.04
			-10	0.6380	0.428	0.47	-0.04
			0	1.4165	0.778	0.95	-0.17
			10	2.1522	1.105	1.24	-0.14
			20	2.8224	1.398	1.375	0.02
			30	3.4064	1.649	-	-
		0.91	-20	-0.1600	0.099	0.12	-0.02
			-10	0.6380	0.305	0.325	-0.02
			0	1.4165	0.502	0.55	-0.05
			10	2.1522	0.684	0.75	-0.07
			20	2.8224	0.845	0.875	-0.03
			30	3.4064	0.980	0.895	0.08
4	Deflected-slipstream configuration Wing S = 10.25 sq ft A = 4.55 Airfoil: NACA 0015 $i_w = 0$ $\frac{c}{D} = 0.755$ $\delta_e = 0$ Propeller K = 4 (overlapped) D = 2.0 ft Flap Two plain flaps (60-percent-chord flap and 30-percent-chord flap) $\frac{c_f}{D} = 0.453$ $\delta_{60} = 30^\circ$ $\delta_{30} = 20^\circ$ Additional $\frac{F}{T} = 0.94$ $\theta = 35^\circ$	0.5	-20	0.43	0.536	0.655	-0.12
			-10	0.81	0.929	0.93	0
			0	1.162	1.293	1.30	-0.01
			10	1.482	1.618	1.52	0.10
			20	1.755	1.894	1.65	0.24
			30	2.028	2.170	1.75	0.42
		0.71	-20	0.43	0.522	0.600	-0.08
			-10	0.81	0.855	1.07	-0.18
			0	1.162	1.220	1.23	-0.01
			10	1.482	1.518	1.565	-0.05
			20	1.755	1.769	1.515	0.25
			30	2.028	1.970	1.420	0.55
		0.91	-20	0.43	0.444	0.420	0.02
			-10	0.81	0.735	0.70	0.04
			0	1.162	1.004	0.935	0.07
			10	1.482	1.242	1.175	0.07
			20	1.755	1.442	1.38	0.06
			30	2.028	1.592	1.25	0.84

* Estimated unstalled power-off lift coefficient

TABLE 9.2.1-A (CONTD)

Ref	Configuration Characteristics	T_c "	α deg	$C_{L_o}^*$	C_L " Calc	C_L " Test	ΔC_L " (Calc-Test)		
4	Tilt-wing configuration Wing S = 10.25 sq ft A = 4.55 Airfoil: NACA 0015 $i_w = 0$ $\frac{c}{D} = 0.75$ $\delta_e = 0$ Propeller K = 4 (overlapped) D = 2.0 ft Additional $\frac{F}{T} = 1.0$ $\theta = 0$	0.5	-10	-0.6217	-0.538	-0.55	0.01		
			0	0	0	0.08	-0.08		
			10	0.6217	0.538	0.63	-0.09		
			20	1.2248	1.059	1.08	-0.02		
		0.71	30	1.7906	1.548	1.33	0.22		
			-10	-0.6217	-0.461	-0.46	0		
			0	0	0	0.08	-0.08		
			10	0.6217	0.461	0.55	-0.09		
		0.91	20	1.2248	0.909	0.98	-0.07		
			30	1.7906	1.329	1.27	0.06		
			40	2.3020	1.709	1.40	0.31		
			-10	-0.6217	-0.342	-	-		
		2	Tilt-wing configuration Wing S = 10.96 sq ft A = 7.66 Airfoil: NACA 4415 $i_w = 0$ $\frac{c}{D} = 0.60$ $\delta_e = 7.4^\circ$ Propeller K = 4 (no overlap) D = 2.0 ft Additional $\frac{F}{T} = 1.0$ $\theta = 5.94^\circ$	0.6	-20	-1.102	-0.7760	-	-
					-10	-0.418	-0.2651	-	-
				0.9	0	0.279	0.2548	0.17	0.08
					10	0.9676	0.7669	0.78	-0.01
20	1.627				1.256	1.23	0.03		
30	2.237				1.707	1.44	0.27		
-20	-1.102	-0.4865	-0.56		0.07				
-10	-0.418	-0.1518	-0.28		0.13				
0	0.279	0.1886	0.08		0.11				
10	0.9676	0.5233	0.45		0.07				
0.95	20	1.627	0.8421	0.78	0.06				
	30	2.237	1.135	1.05	0.09				
	40	2.779	1.394	1.20	0.19				
	-20	-1.102	-0.4133	-	-				
	-10	-0.418	-0.1256	-	-				
	0	0.279	0.1669	0.07	0.10				
	10	0.9676	0.4543	0.34	0.11				
	20	1.627	0.7279	0.59	0.14				
40	30	2.237	0.9796	0.80	0.18				
	40	2.779	1.201	0.97	0.23				

*Estimated unstalled power-off lift coefficient

TABLE 9.2.1-A (CONTD)

Ref	Configuration Characteristics	T_c "	α deg	$C_{L_o}^*$	C_L " Calc	C_L " Test	ΔC_L " (Calc-Test)
5	Tilt-wing configuration	0.49	-10	-0.2623	-0.109	-0.20	0.09
	Wing		0	0.4865	0.481	0.40	0.08
	S = 11.0 sq ft		10	1.2205	1.056	0.95	0.11
	A = 4.85		20	1.9175	1.599	1.52	0.08
	Airfoil: NACA 4415	0.69	-10	-0.2624	-0.0552	-0.20	0.15
	$i_w = 5^\circ$		0	0.4865	0.4350	0.32	0.12
	$\frac{c}{D} = 0.75$		10	1.2205	0.9123	0.86	0.05
	$\delta_e = 12.40^\circ$		20	1.9175	1.3616	1.29	0.07
	Propeller						
	K = 4 (overlapped)						
D = 2.0 ft							
Additional							
$\frac{F}{T} = 1.0$							
$\theta = 11.0^\circ$							

*Estimated unstalled power-off lift coefficient Av error = $\frac{\sum |\Delta C_L|}{n} = 0.092$

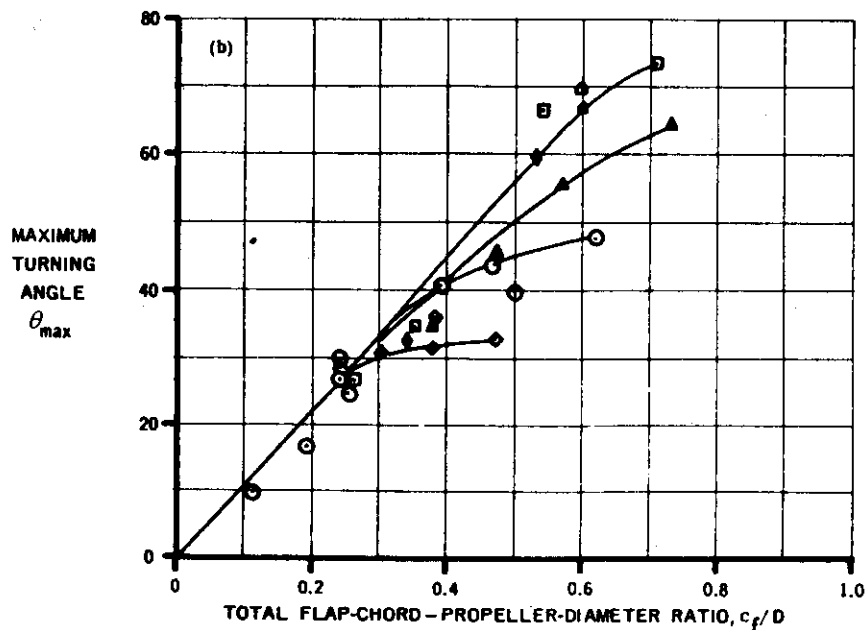
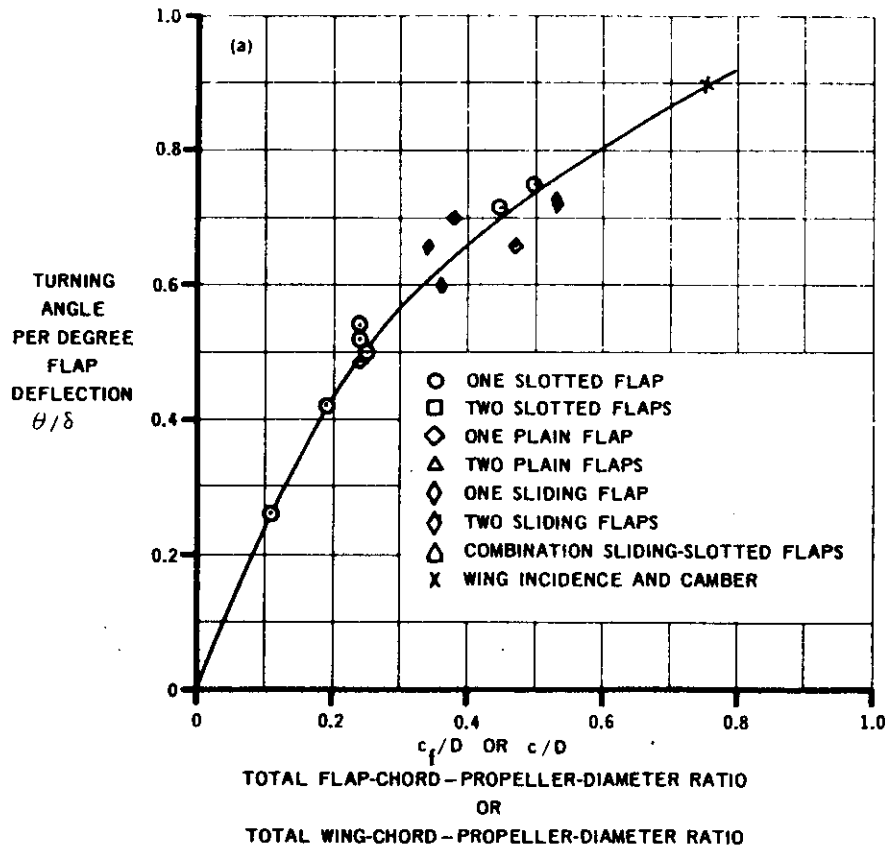


FIGURE 9.2.1-18 VARIATION OF TURNING ANGLE WITH THE RATIO OF TOTAL FLAP CHORD TO PROPELLER DIAMETER FOR VARIOUS CONFIGURATIONS

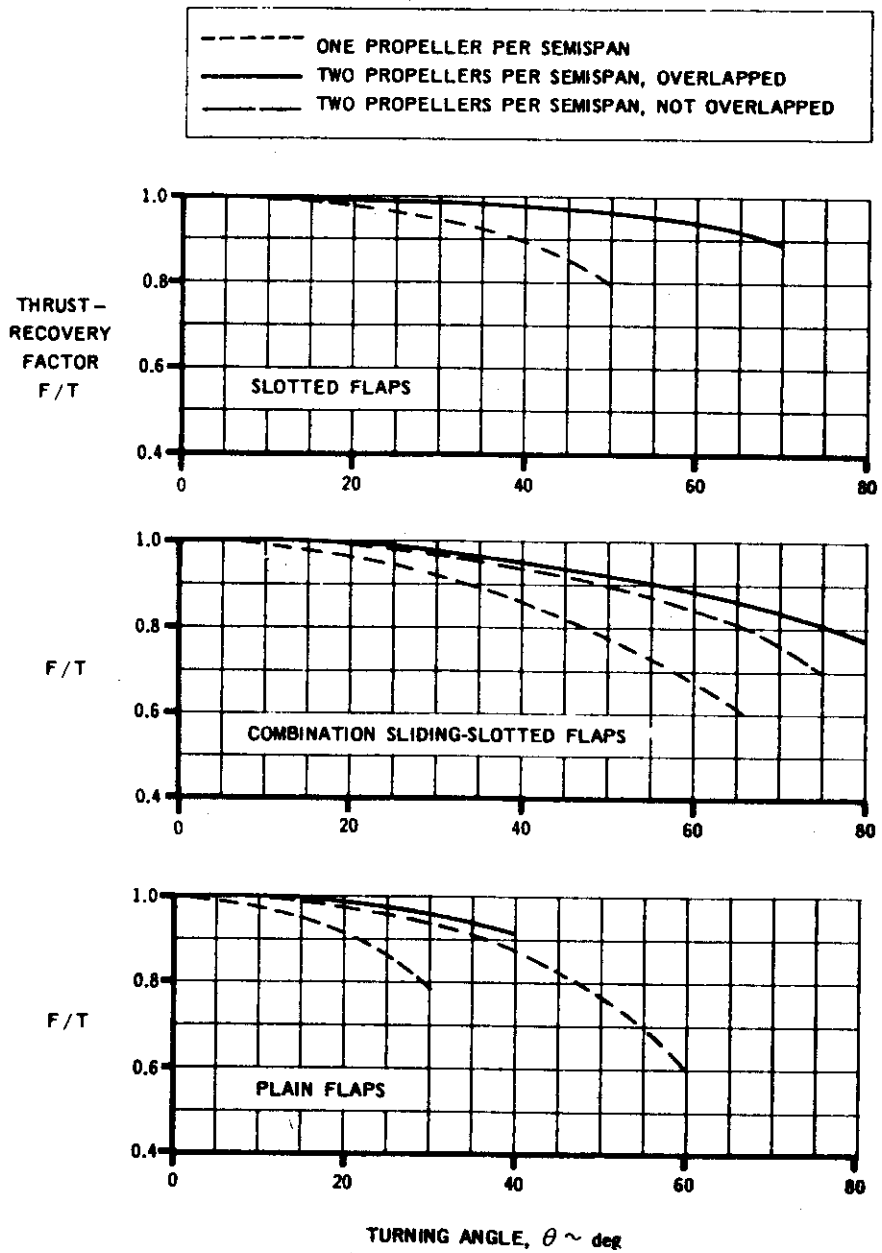


FIGURE 9.2.1-19 VARIATION OF THE AVERAGE THRUST-RECOVERY FACTOR FOR VARIOUS FLAP AND PROPELLER CONFIGURATIONS

9.2.3 PROPELLER-WING-FLAP DRAG VARIATION WITH POWER AND ANGLE OF ATTACK

This Section presents a method for estimating the drag force of propeller-wing-flap configurations at combined forward speed and power-on conditions. The method is applicable only in the unstalled region of flight. The discussion in Section 9.2.1 is directly applicable to this Section, and the reader is referred to that discussion for a general description of the fundamental phenomena.


DATCOM METHOD

The negative drag force of a propeller-wing-flap configuration at combined forward speed and power-on conditions is given in reference 1 as

$$C_{F_x}'' = -C_{D_0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{KS_p}{S} \cos(\theta + \alpha) - 1.6 \frac{F}{T} T_c'' \frac{KS_p}{S} [1 - \cos(\theta + \alpha)] (1 - T_c'')^{1/2} \quad 9.2.3-a$$

where all the parameters are defined in the general notation list of Section 9.2. The coefficients, except for C_{D_0} , are based on the dynamic pressure in the propeller slipstream, and the positive direction of forces and angles is shown in Figure 9.2-6.

The first term of equation 9.2.3-a represents the power-off drag contribution, the second term represents the component of thrust opposing the drag, and the third term represents the drag resulting from the lift augmentation due to the propeller slipstream. The significance of these terms is illustrated in sketch (a).

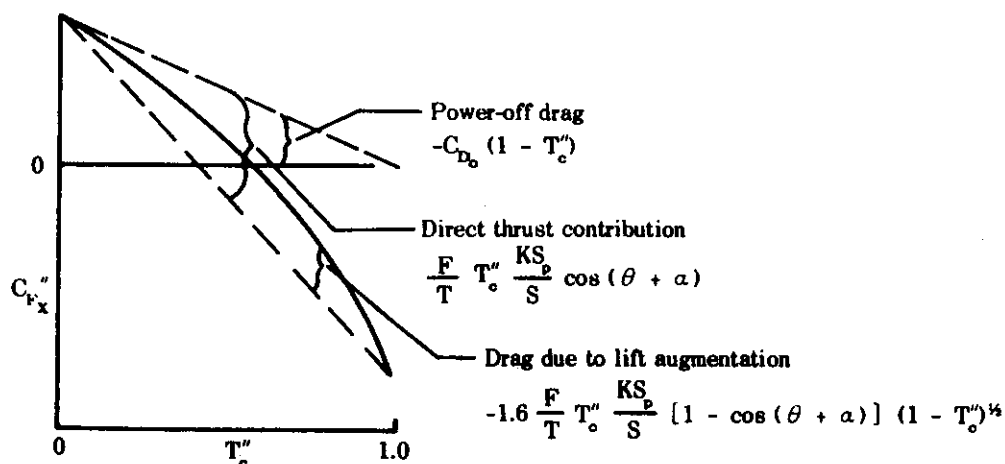

SKETCH (a)

The procedure to be followed in evaluating equation 9.2.3-a is outlined in the following steps.

Step 1. Determine the slipstream turning angle θ as in Step 1 of the method outline of Section 9.2.1.

In using this procedure to determine the slipstream turning angle it is necessary that the value be obtained over the linear part of the curve of variation of turning angle with flap deflection. The range of linear variation is defined in Step 1 of the method outline of Section 9.2.1.

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$ as in Step 2 of the method outline of Section 9.2.1.

Step 3. Determine the power-off drag coefficient C_{D_0} .

A wing which is stalled in the power-off condition would frequently be unstalled at some moderate to high propeller thrust coefficient. In order to estimate the power-on data in this region, it is necessary to use the drag values that would exist if the wing were unstalled in the power-off condition. Where possible, experimental power-off data should be used for this purpose. Under these conditions the power-off drag coefficient can be estimated by

$$C_{D_0} = C_{D_f} + \frac{C_{L_0}^2}{\pi A e} \quad 9.2.3-b$$

where

C_{D_f} is the power-off zero-lift drag coefficient. (For the purpose of the Datcom this coefficient is taken as the minimum experimental power-off drag coefficient in order to simplify the definition of the drag polar.)

C_{L_0} is the power-off lift coefficient obtained as in Step 3 of the method outline of Section 9.2.1

e is the span efficiency factor for the configuration. For the purpose of the Datcom $e = 0.85$.

If power-off data for the given configuration are not available or if power-off test data do not exhibit any region of unstalled flow, the following procedure should be used:

- (a) Determine the power-off lift variation and α_0 as in Step 3 of the method outline of Section 9.2.1.
- (b) Determine the power-off zero-lift drag coefficient for the unflapped wing from Section 4.1.5.1.
- (c) Determine the zero-lift drag increment due to flap deflection from Section 6.1.7.

then

$$C_{D_f} = C_{D_f}(4.1.5.1) + (\Delta C_D)(6.1.7) \quad 9.2.3-c$$

- (d) The power-off drag coefficient of the flapped wing at angle of attack is then obtained from equation 9.2.3-b.

Step 4. The propeller thrust coefficient T_c'' will usually be specified; however, if necessary this parameter can be estimated using the method of Section 9.1.1.

$$\left(\text{Note that } T_{c9.2.1} = T_{c9.1.1} \frac{S_p}{S}, \text{ and } T_c'' = \frac{T_{c9.1.1}}{T_{c9.1.1} + K} \right)$$

Step 5. The drag force coefficient is then obtained from equation 9.2.3-a.

The sample problems illustrate the use of the Datcom method in estimating the horizontal-force coefficients of both deflected-slipstream and tilt-wing configurations.

Comparison of experimental data, in the unstalled flight regime, with calculations made using the Datcom method is presented for deflected-slipstream and tilt-wing configurations in Table 9.2.3-A.

Sample Problems

1. Deflected-Slipstream Configuration

Given: A propeller-wing-flap deflected-slipstream configuration of reference 2. This is the same configuration as that of sample problem 1 of Section 9.2.1. The characteristics are repeated below.

Wing Characteristics

$S = 10.96$ sq ft $A = 7.66$ NACA 4415 airfoil section

$i_w = 0$ $c = 1.2$ ft (flap retracted) $c = 1.68$ ft (Fowler flap extended)

Flap Characteristics

Fowler flap $\frac{c_f}{c} = 0.286$ (flap extended) $\delta = 50^\circ$

Propeller Characteristics

$K = 4$ (2 propellers per semispan, no overlap) $D = 2.0$ ft

$S_p = 3.14$ sq ft

Additional Characteristics

$T_c'' = 0.90$ $\delta_e = 7.4^\circ$

Compute:

Step 1. Determine the slipstream turning angle θ .

$\theta = 30.94^\circ$ (sample problem 1, Section 9.2.1)


Also note that the variation of θ with δ for this wing-flap configuration was shown to be within the range of linear variation as defined by the Datcom.

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$.

$$\frac{F}{T} = 0.96 \quad (\text{sample problem 1, Section 9.2.1})$$

Step 3. Determine the power-off drag coefficient C_{D_0} .

The power-off drag coefficient is obtained using the experimental zero-lift drag coefficient, and the power-off lift coefficient at angle of attack as determined in sample problem 1 of Section 9.2.1.

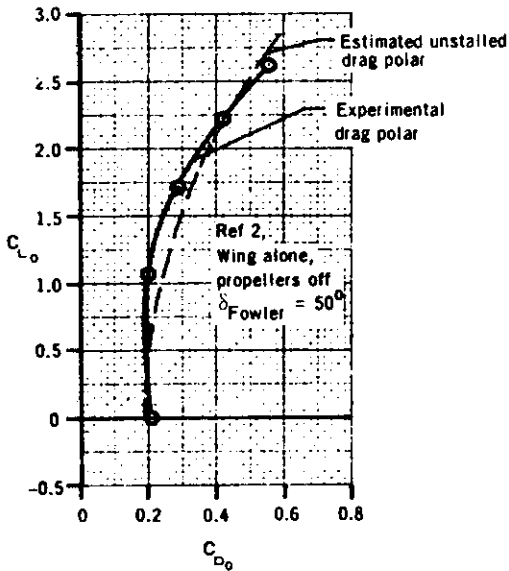

$$C_{D_f} = 0.19 \quad (\text{minimum experimental power-off drag coefficient})$$

The drag polar that would exist if the wing were unstalled in the power-off condition is estimated by

$$C_{D_0} = C_{D_f} + \frac{C_{L_0}^2}{\pi A e} \quad (\text{equation 9.2.3-b})$$

α deg	C_{L_0} Problem 1 9.2.1	$\frac{C_{L_0}^2}{\pi A e}$	C_{D_0}
-20	0	0	0.1900
-10	1.422	0.1017	0.2917
0	2.842	0.3949	0.5849
10	4.154	0.8436	1.0336
20	5.341	1.3946	1.5846

Solution:

$$C_{F_x} = -C_{D_0} (1 - T_c) + \frac{F}{T} T_c \frac{K S_p}{S} \cos(\theta + \alpha) - 1.6 \frac{F}{T} T_c \frac{K S_p}{S} \left[1 - \cos(\theta + \alpha) \right] (1 - T_c)^{1/2} \quad (\text{equation 9.2.3-})$$

$$= -C_{D_0} (1 - 0.9) + (0.96)(0.9) \frac{(4)(3.14)}{(10.96)} \cos(\theta + \alpha)$$

$$- 1.6(0.96)(0.9) \frac{(4)(3.14)}{(10.96)} \left[1 - \cos(\theta + \alpha) \right] (1 - 0.9)^{1/2}$$

$$= -0.10 C_{D_0} + 0.990 \cos(\theta + \alpha) - 0.501 \left[1 - \cos(\theta + \alpha) \right]$$

①	②	③	④	⑤	⑥	⑦	⑧
α deg	C_{D_o}	$(\theta + \alpha)$ deg	$\cos(\theta + \alpha)$ cos ③	0.10 ②	0.990 ④	0.501 $\cdot [1 - ④]$	C_{F_x}'' - ⑤ + ⑥ - ⑦
-20	0.1900	10.94	0.9818	0.0190	0.9720	0.0091	0.9439
-10	0.2917	20.94	0.9340	0.0292	0.9247	0.0331	0.8624
0	0.5849	30.94	0.8578	0.0585	0.8492	0.0712	0.7195
10	1.0336	40.94	0.7555	0.1034	0.7479	0.1225	0.5220
20	1.5846	50.94	0.6302	0.1585	0.6239	0.1853	0.2801

These results are compared with experimental data in table 9.2.3-A.

2. Deflected-Slipstream Configuration

Given: A propeller-wing-flap deflected-slipstream configuration of reference 2. This is the same configuration as that of sample problem 2 of Section 9.2.1. The characteristics are repeated below.

Wing Characteristics

$S = 10.96$ sq ft $A = 7.66$ NACA 4415 airfoil section

$i_w = 0$ $c = 1.2$ ft (flaps retracted) $c = 1.68$ ft (sliding flap and Fowler flap extended)

Flap Characteristics

$\frac{c_f}{c} = 0.566$ (sliding flap and Fowler flap extended; effective chord of sliding flap measured to flap knee)

$$\left. \begin{array}{l} \delta_{\text{sliding}} = 30^\circ \\ \delta_{\text{Fowler}} = 30^\circ \end{array} \right\} \delta = \delta_{\text{sliding}} + \delta_{\text{Fowler}} = 60^\circ$$

Propeller Characteristics

$K = 4$ (2 propellers per semispan, no overlap) $D = 2.0$ ft

$S_p = 3.14$ sq ft

Additional Characteristics

$T_c'' = 0.90$ $\delta_e = 7.4^\circ$

Compute:

Step 1. Determine the slipstream turning angle θ .


$\theta = 49.14^\circ$ (sample problem 2, Section 9.2.1) Also note that the variation of θ with δ for this wing-flap configuration was shown to be within the range of linear variation as defined by the Datcom.

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$.

$$\frac{F}{T} = 0.90 \quad (\text{sample problem 2, Section 9.2.1})$$

Step 3. Determine the power-off drag coefficient C_{D_o} .

The power-off drag coefficient is obtained using the experimental zero-lift drag coefficient, and the power-off lift coefficient at angle of attack determined in sample problem 2 of Section 9.2.1.

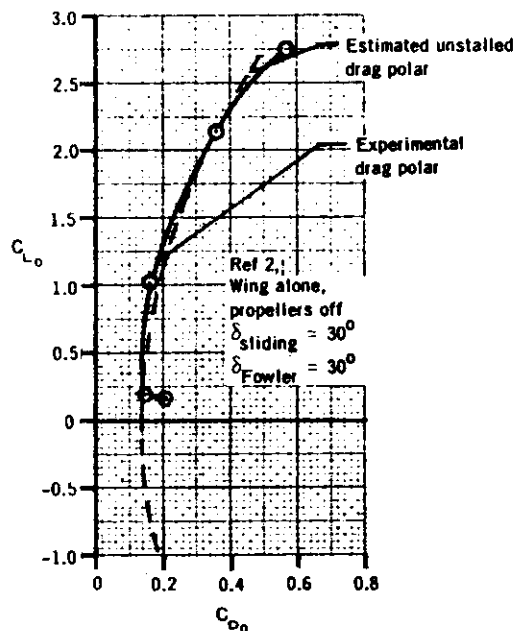

$$C_{D_f} = 0.14 \quad (\text{minimum experimental power-off drag coefficient})$$

The drag polar that would exist if the wing were unstalled in the power-off condition is estimated by

$$C_{D_o} = C_{D_f} + \frac{C_{L_o}^2}{\pi A e} \quad (\text{equation 9.2.3-b})$$

α deg	C_{L_o} Problem 2 9.2.1	$\frac{C_{L_o}^2}{\pi A e}$	C_{D_o}
-40	-0.8990	0.0395	0.1795
-35	0	0	0.1400
-20	2.6693	0.3483	0.4883
-10	4.3587	0.9288	1.0688
0	5.9161	1.7111	1.8511
10	7.2930	2.6002	2.7402
20	8.4492	3.4900	3.6301

Solution:

$$\begin{aligned}
 C_{F_x}'' &= -C_{D_o} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_p}{S} \cos(\theta + \alpha) \\
 &\quad - 1.6 \frac{F}{T} T_c'' \frac{K S_p}{S} [1 - \cos(\theta + \alpha)] (1 - T_c'')^{1/2} \\
 & \hspace{15em} (\text{equation 9.2.3-a}) \\
 &= -C_{D_o} (1 - 0.9) + (0.90)(0.90) \frac{(4)(3.14)}{(10.96)} \cos(\theta + \alpha) \\
 &\quad - 1.6 (0.90)(0.90) \frac{(4)(3.14)}{(10.96)} [1 - \cos(\theta + \alpha)] (1 - 0.9)^{1/2} \\
 &= -0.10 C_{D_o} + 0.9282 \cos(\theta + \alpha) - 0.4697 [1 - \cos(\theta + \alpha)]
 \end{aligned}$$

α deg	C_{D_0}	$(\theta + \alpha)$ deg	$\cos(\theta + \alpha)$ cos ③	0.10 ②	0.9282 ④	0.4697 $ 1 - ④ $	C_{F_x}'' - ⑤ + ⑥ - ⑦
-40	0.1795	9.14	0.9873	0.0180	0.9164	0.0060	0.8924
-35	0.1400	14.14	0.9697	0.0140	0.9001	0.0142	0.8719
-20	0.4883	29.14	0.8734	0.0488	0.8107	0.0595	0.7024
-10	1.0688	39.14	0.7756	0.1069	0.7199	0.1054	0.5076
0	1.8511	49.14	0.6542	0.1851	0.6072	0.1624	0.2597
10	2.7402	59.14	0.5129	0.2740	0.4761	0.2288	-0.0267
20	3.6301	69.14	0.3561	0.3630	0.3305	0.3024	-0.3349

These results are compared with experimental data in table 9.2.3-A

3. Tilt-Wing Configuration

Given: The propeller-wing configuration of reference 5. This is the same configuration as that of sample problem 3 of Section 9.2.1. The characteristics are repeated below.

Wing Characteristics

$S = 11.0$ sq ft $A = 4.89$ $i_w = 5^\circ$ NACA 4415 airfoil section
 $c = 1.5$ ft

Propeller Characteristics

$K = 4$ (2 propellers per semispan, overlapped) $D = 2.0$ ft
 $S_p = 3.14$ sq ft

Additional Characteristics

$\tau_c'' = 0.69$ $\delta_e = 12.4^\circ$

Compute:

Step 1. Determine the slipstream turning angle θ .


$\theta = 11.0^\circ$ (sample problem 3, Section 9.2.1)

Step 2. Determine the thrust-recovery factor $\frac{F}{T}$.

$\frac{F}{T} = 1.0$ (sample problem 3, Section 9.2.1)

Step 3. Determine the power-off drag coefficient C_{D_0}

The power-off drag coefficient is obtained using the experimental zero-lift drag coefficient, and the power-off lift coefficient at angle of attack determined in sample problem 3 of Section 9.2.1.

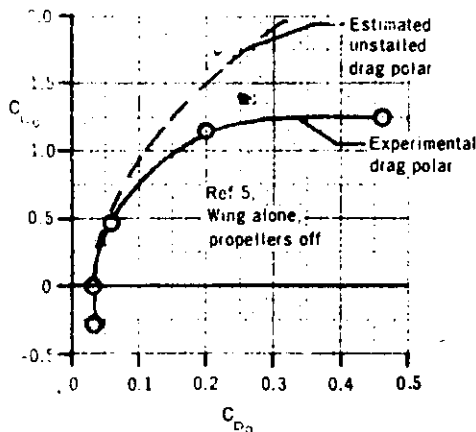

$$C_{Df} = 0.035$$

The drag polar that would exist if the wing were unstalled in the power-off condition is estimated by

$$C_{D0} = C_{Df} + \frac{C_{L0}^2}{\pi A e} \quad (\text{equation 9.2.3-b})$$

α deg	C_{L0} Problem 3 9.2.1	$\frac{C_{L0}^2}{\pi A e}$	C_{D0}
-10	-0.2624	0.0053	0.0403
-6.5	0	0	0.0350
0	0.4865	0.0181	0.0531
10	1.2205	0.1141	0.1491
20	1.9175	0.2816	0.3166

Solution:

$$C_{Fx}'' = -C_{D0} (1 - T_c'') + \frac{F}{T} T_c'' \frac{K S_p}{S} \cos(\theta + \alpha)$$

$$- 1.6 \frac{F}{T} T_c'' \frac{K S_p}{S} [1 - \cos(\theta + \alpha)] (1 - T_c'')^{1/2}$$

(equation 9.2.3-a)

$$= -C_{D0} (1 - 0.69) + (1.0)(0.69) \frac{(4)(3.14)}{(11.0)} \cos(\theta + \alpha)$$

$$- (1.6)(1.0)(0.69) \frac{(4)(3.14)}{(11.0)} [1 - \cos(\theta + \alpha)] (1 - 0.69)^{1/2}$$

$$= -0.31 C_{D0} + 0.7879 \cos(\theta + \alpha) - 0.7018 [1 - \cos(\theta + \alpha)]$$

① α deg	② C_{D0}	③ $(\theta + \alpha)$ deg	④ $\cos(\theta + \alpha)$ cos ③	⑤ 0.31 ②	⑥ 0.7879 ④	⑦ 0.7018 · [1 - ④]	⑧ C_{Fx}'' - ⑤ + ⑥ - ⑦
-10	0.0403	1.0	0.9998	0.0125	0.7877	0.0001	0.7751
-6.5	0.0350	4.5	0.9969	0.0109	0.7855	0.0022	0.7724
0	0.0531	11.0	0.9816	0.0165	0.7734	0.0129	0.7440
10	0.1491	21.0	0.9336	0.0462	0.7356	0.0466	0.6428
20	0.3166	31.0	0.8572	0.0981	0.6754	0.1002	0.4771

These results are compared with experimental data in table 9.2.3-A.

REFERENCES

1. Kuhn, R. E.: Semiempirical Procedure for Estimating Lift and Drag Characteristics of Propeller-Wing-Flap Configurations for Vertical- and Short-Take-off-and-Landing Airplanes. NASA Memo 1-16-59L, 1959. (U)
2. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of Three Propeller-Driven VTOL Configurations in the Transition Speed Range, Including Effects of Ground Proximity. NASA TN D-55, 1960. (U)
3. Kuhn, R. E., and Draper, J. W.: Investigation of Effectiveness of Large-Chord Slotted Flaps in Deflecting Propeller Slipstreams Downward for Vertical Take-Off and Low-Speed Flight. NACA TN 3364, 1955. (U)
4. Kuhn, R. E., and Draper, J. W.: An Investigation of a Wing-Propeller Configuration Employing Large-Chord Plain Flaps and Large Diameter Propellers for Low-Speed Flight and Vertical Take-Off. NACA TN 3307, 1954. (U)
5. Kuhn, R. E., and Hayes, W. C., Jr.: Wind-Tunnel Investigation of Effect of Propeller Slipstreams on Aerodynamic Characteristics of a Wing Equipped with a 50-Percent-Chord Sliding Flap and a 30-Percent-Chord Slotted Flap. NACA TN 3918, 1957. (U)

TABLE 9.2.3-A
DATA SUMMARY AND SUBSTANTIATION
PROPELLER-WING-FLAP DRAG COEFFICIENT

Ref	Configuration Characteristics	T_c "	α deg	C_{D_o} *	C_{F_x} " Calc	C_{F_x} " Test	ΔC_{F_x} " (Calc-Test)		
2	Deflected-slipstream configuration (See reference 2, table 9.2.1-A)	0.6	-20	0.1900	0.552	0.43	0.12		
			-10	0.2917	0.448	0.37	0.08		
			0	0.5849	0.229	0.19	0.04		
			10	1.0336	-0.086	-0.19	0.10		
		0.9	-20	0.1900	0.944	0.84	0.10		
			-10	0.2917	0.862	0.79	0.07		
			0	0.5849	0.720	0.65	0.07		
			10	1.0336	0.522	0.43	0.09		
		0.95	-20	1.5846	0.280	0.11	0.17		
			-20	0.1900	1.009	0.92	0.09		
			-10	0.2917	0.936	0.87	0.07		
			0	0.5849	0.813	0.75	0.06		
					10	1.0336	0.645	0.57	0.07
					20	1.5846	0.440	0.32	0.12
		2	Deflected-slipstream configuration (See reference 2, table 9.2.1-A)	0.6	-40	0.1795	0.545	0.27	0.27
					-20	0.4883	0.323	0.18	0.14
-10	1.0688				-0.012	-0.05	0.04		
0	1.8511				0.260	0.30	-0.04		
0.9	-40			0.1795	0.892	0.72	0.17		
	-20			0.4883	0.702	0.68	0.02		
	-10			1.0688	0.508	0.53	-0.02		
	0			1.8511	0.260	0.30	-0.04		
0.95	10			2.7402	-0.027	0	-0.03		
	20			3.6301	-0.335	-0.20	0.14		
	-40			0.1795	0.968	0.83	0.14		
	-20			0.4883	0.847	0.78	0.07		
					-10	1.0688	0.709	0.65	0.06
					0	1.8511	0.526	0.45	0.08
					10	2.7402	0.309	0.18	0.13
					20	3.6301	0.068	-0.06	0.13
			30	4.4117	-0.187	-0.21	0.02		

*Estimated unstalled power-off drag coefficient

TABLE 9.2.3-A (CONTD)

Ref	Configuration Characteristics	T _c "	α deg	C _{D0} *	C _{Fx} " Calc	C _{Fx} " Test	ΔC _{Fx} " (Calc Test)
3	Deflected-slipstream configuration (See reference 3, table 9.2.1-A)	0.5	-20	0.1521	0.212	0.17	0.04
			-10	0.1835	0.171	0.15	0.02
			0	0.3151	0.062	0.045	0.02
			10	0.5312	-0.106	-0.145	0.04
			20	0.8056	-0.318	-0.37	0.05
			30	1.1050	-0.555	-0.49	-0.06
		0.71	-20	0.1521	0.366	0.285	0.08
			-10	0.1835	0.326	0.275	0.05
			0	0.3151	0.234	0.19	0.04
			10	0.5312	0.097	0.025	0.07
			20	0.8056	-0.075	-0.15	0.07
			30	1.1050	-0.271	-0.25	-0.02
		0.91	-20	0.1521	0.513	0.425	0.09
			-10	0.1835	0.479	0.40	0.08
			0	0.3151	0.413	0.345	0.07
			10	0.5312	0.318	0.23	0.09
			20	0.8051	0.199	0.08	0.12
			30	1.1050	0.061	-0.02	0.08
4	Deflected-slipstream configuration (See reference 4, table 9.2.1-A)	0.5	-20	0.1652	0.4571	0.46	0
			-10	0.2040	0.3638	0.36	0
			0	0.2611	0.2272	0.23	0
			10	0.3308	0.0532	0.08	-0.03
			20	0.4035	-0.1487	-0.21	0.06
			30	0.4035	-0.1487	-0.21	0.06
		0.71	-20	0.1652	0.7261	0.72	0.01
			-10	0.2040	0.6232	0.65	-0.03
			0	0.2611	0.4726	0.50	-0.03
			10	0.3308	0.2799	0.275	0
			20	0.4035	0.0534	0.18	-0.13
			30	0.4035	0.0534	0.18	-0.13
		0.91	-20	0.1652	0.9910	0.97	0.02
			-10	0.2040	0.8941	0.885	0.01
			0	0.2611	0.7524	0.76	-0.01
			10	0.3308	0.5703	0.60	-0.03
			20	0.4035	0.3545	0.38	-0.03
			30	0.4035	0.3545	0.38	-0.03

*Estimated unstalled power-off drag coefficient

TABLE 9.2.3-A (CONTD)

Ref	Configuration Characteristics	T _c "	α deg	C _D * o	C _{F_x} " Calc	C _{F_x} " Test	ΔC _{F_x} " (Calc-Test)
4	Tilt-wing configuration (See reference 4, table 9.2.1-A)	0.5	-10	0.04181	0.572	0.57	0
			0	0.01	0.608	0.62	-0.01
			10	0.04181	0.572	0.58	-0.01
			20	0.1335	0.467	0.41	0.06
			30	0.2739	0.301	0.1	0.20
		0.71	-10	0.04181	0.833	0.80	0.03
			0	0.01	0.867	0.82	0.05
			20	0.1335	0.734	0.66	0.07
			30	0.2739	0.574	0.42	0.15
			40	0.4461	0.362	0.14	0.22
		0.91	-10	0.04181	1.086	1.08	0.01
			0	0.01	1.114	1.08	0.03
			10	0.04181	1.086	1.05	0.04
			20	0.1335	1.004	0.94	0.06
			30	0.2739	0.869	0.76	0.11
			40	0.4461	0.689	0.55	0.14
			50	0.6294	0.469	0.32	0.15
2	Tilt-wing configuration (See reference 2, Table 9.2.1-A)	0.6	-20	0.0794	0.6145	-	-
			-10	0.0285	0.6727	0.56	0.11
			0	0.0238	0.6706	0.57	0.10
			10	0.0658	0.6080	0.46	0.15
			20	0.1494	0.4885	0.21	0.28
		0.9	30	0.2647	0.3183	-0.11	0.43
			-20	0.0794	0.9770	0.76	0.22
			-10	0.0285	1.0247	0.86	0.16
			0	0.0238	1.0206	0.92	0.10
			10	0.0658	0.9650	0.86	0.11
		0.95	20	0.1494	0.8601	0.71	0.15
			30	0.2647	0.7092	0.50	0.21
			40	0.3976	0.5185	0.26	0.26
			-20	0.0794	1.0405	-	-
			-10	0.0285	1.0836	-	-
			0	0.0238	1.0795	0.93	0.15
			10	0.0658	1.0285	0.88	0.15
20	0.1494	0.9324	0.79	0.14			
30	0.2647	0.7940	0.65	0.14			
40	0.3976	0.6186	0.46	0.16			

*Estimated unstalled power-off drag coefficient

TABLE 9.2.3-A (CONTD)

Ref	Configuration Characteristics	T _c "	α deg	C _{D₀} *	C _{F_x} " Calc	C _{F_x} " Test	ΔC _{F_x} " (Calc-Test)
5	Tilt-wing configuration (See reference 5, table 9.2.1-A)	0.49	-10	0.0403	0.539	0.54	0
			0	0.0531	0.510	0.52	-0.01
			10	0.1491	0.402	0.40	0
			20	0.3166	0.225	0.16	0.06
		0.69	-10	0.0403	0.775	0.75	0.02
			0	0.0531	0.744	0.71	0.03
			10	0.1491	0.643	0.64	0
			20	0.3166	0.477	0.43	0.05

*Estimated unstalled power-off drag coefficient Av. Error = $\frac{\sum \Delta C_{F_x}''}{n} = 0.082$

9.3 DUCTED-PROPELLER CHARACTERISTICS

The estimation of ducted-propeller aerodynamics can be approached in three phases, each representing a VTOL aircraft flight regime. These are static operation (hovering), axial flow (approximately zero duct angle of attack as in cruise or vertical climb), and nonaxial flow (high duct angles of attack as in transition). The most important and most difficult problem is the prediction of the aerodynamic characteristics in the presence of strong power effects at high angles of attack and low speeds during transition.

The methods presented in this section are for predicting forces and moments on isolated ducted propellers as functions of power and angle of attack. The static and axial-flow regimes are trivial, and no attempt is made to deal with the characteristics in these regimes. It is virtually impossible to present quantitative information on the effects of the various geometric and aerodynamic variables involved because of the complexity of the problem and the general lack of appropriate data. However, a qualitative discussion of the ducted-propeller problem is given with primary emphasis on the nonaxial flow regime.

A ducted propeller consists of a propeller enclosed in an axially symmetric duct as shown in figure 9.3-12. The purpose of the duct is to increase the thrust-generating capability of the entire unit in the static and low subsonic speed regimes for a given propeller diameter and power input. If the chordwise cross section of the duct is reasonably faired, the unit can function as a ring wing as well as a thrusting propeller.

Differing from flying platforms or "flying jeeps," ducted-propeller units are typically mounted on the tips of low-aspect-ratio wings with the capability of rotating from 0 to 90 degrees. Since much of the ducted-propeller work has been the application to particular vehicle designs, the emphasis has been on propeller design and development of auxiliary devices to augment thrust and to provide control moments. This work is thus of little interest here because the lift and pitching moments are not affected significantly. The development of various auxiliary devices is reported in reference 84, and additional information pertaining to experimental investigations is given in table 9.3-A.

The duct complicates the problem of predicting the aerodynamic characteristics because of the strong mutual interference effects and the increased number of geometric variables. A preliminary list of geometric variables includes duct aspect ratio, duct section parameters (thickness ratio, camber, leading-edge radius, etc.), diffuser angle, propeller activity factor, propeller pitch setting, propeller solidity, propeller section parameters (twist, camber, taper, thickness, etc.), blade tip clearance, center-body location relative to the duct, center-body shape, ratio of hub diameter to propeller diameter, and propeller location within the duct. Aside from this seemingly endless list of geometric variables, there are the aerodynamic variables of angle of attack, Reynolds number, advance ratio, and Mach number.

The ducted propeller in the nonaxial flow regime has received very little theoretical attention in comparison to that given to the static and axial-flow regimes. The theoretical work available in the literature is generally classified under one of three general categories of analysis: (1) method of singularities, (2) momentum considerations, and (3) methods which seek to avoid the

mathematical complexities of the method of singularities and yet yield more detailed results than simple momentum theory. The method of singularities is relatively complex, and almost all solutions in the literature are restricted to special classes of duct profiles. The method involves replacing the annular airfoil by a vortex distribution on its camber line, determining the axial and radial velocity components induced by this vortex distribution, and relating these velocity components to the shape of the airfoil by satisfying the potential flow streamline condition. Two approaches to the problem can be defined: (1) given the vortex distribution, find the corresponding shape and determine its aerodynamic characteristics, and (2) given the shape, find the corresponding vortex distribution, from which the aerodynamic characteristics can be determined. In either case, an iteration process is required if other than a first approximation is desired. The effects of geometric parameters and propellers are induced by the use of additional distributed singularities. The theoretical basis on which the method of singularities rests is developed and discussed in reference 57.

An approximate theory for nonaxial flow, based on the method of singularities, is developed by Burggraf in reference 1. Burggraf represents the ducted propeller as a short, thin, cylindrical duct with a uniformly loaded actuator disk across its exit plane. Each section of the duct is treated as a thin two-dimensional airfoil, and solutions are obtained by means of conformal transformations. An analysis with less restricted geometry has been made by Kriebel and summarized in reference 55. Kriebel treats the duct as a thin cylinder (but not necessarily short) and represents the propeller as a uniformly loaded actuator disk located at the duct inlet. The vorticity distribution bound to the duct and trailing from it is found in terms of a Fourier series by the method of singularities. The results are obtained by solving for the coefficients of the Fourier series representing the duct-bound vorticity distribution. Both Burggraf and Kriebel include the nonaxial flow case by assuming the vorticity shed by both the actuator disk and the duct to be concentrated on a circular cylinder which extends axially downstream, even at angles of attack. Because of this assumption, the exit velocity must be large relative to the cross-flow component of the free-stream velocity, i.e.,

$$V_e \gg V_\infty \sin \alpha_D,$$

a restriction which requires high actuator disk loadings at high angles of attack.

Momentum theory in itself is not sufficient to predict the performance of a ducted propeller, since the relationships between thrust and power are in terms of the area and velocity of the final wake. At the present time, there appears to be no available way of relating wake characteristics to duct design without using the method of singularities. To avoid this difficulty some assumption must be made which relates the duct exit characteristics to the final wake. The most common assumption, forming what is generally termed "simple momentum theory," is that the final wake area is equal to the duct exit area. This implies that the exit velocity profile is uniform and the static pressure at the exit is equal to that at infinity. The nonaxial flow case is generally based on the additional assumption that the internal mass flow exits parallel to the duct axis, an assumption which is valid only for low duct aspect ratios and high exit-velocity ratios. Examples of simple momentum theory as applied to nonaxial flow are given in references 85 and 58.

Moser and Livingston, in reference 70, develop semiempirical expressions for the aerodynamic characteristics of ducted propellers in nonaxial flow by adapting blade element theory and modifications to it to take some account of duct influence. This method is shown to be reasonable for analyzing ducted-propeller characteristics where the deflection of the airstream is relatively small.

Minassian, in reference 65, treats the ducted propeller in nonaxial flow as a ring wing. He assumes that the propeller causes the internal pressures on the duct to cancel one another and then applies two-dimensional airfoil characteristics to predict normal-force variation with angle of attack. This work is restricted to rough approximations at low angles of attack and high advance ratios.

Wind-tunnel tests cover a wide variety of ducted propellers in the nonaxial flow regime; however, the data are often of questionable accuracy because of wall-interference effects and data accuracy limitations at the tunnel speeds required to simulate low-speed flight. Testing small models in an effort to avoid wall-interference effects has not proved satisfactory because of the errors associated with low Reynolds numbers and balance-system sensitivity. The uncertainties of wind-tunnel test data, coupled with the geometric and aerodynamic variables involved, preclude generalization and verification of any valid prediction methods. Although a large number of experimental investigations have been conducted, it is still difficult to draw any general conclusions pertaining to the effects of geometric or aerodynamic variations. However, the results that are available can serve at least to give a practical orientation to some aspects of the ducted propeller problem. Accordingly, a qualitative discussion of the effects of a number of the important variables is given.

Duct Leading-Edge Radius

The duct leading-edge radius is critical in that it must be large enough to prevent inlet flow separation at high power and/or angle of attack and yet not so large as to produce an excessive drag penalty in cruise flight. Leading-edge lip stall reduces lift and pitching moment and increases the power required.

Diffuser

A properly designed diffuser increases the diameter of the fully developed stream tube, thereby increasing the static thrust and efficiency of a given ducted propeller. Tests of two unpowered ducts (reference 36) in nonaxial flow indicate that diffusion of the duct afterbody results in an appreciable increase in lift-curve slope and maximum-lift stall angle of attack. Reference 36 also indicates that diffusion causes the center of pressure to move forward. These effects can be attributed to the increased internal mass flow through the duct resulting from increased positive circulation.

Although substantial diffusion may be beneficial in the static flow regime, it can lead to internal flow separation during essentially axial flow with an attendant drag increase.

Exit Stators

In addition to providing a structural tie between the center body and the duct, exit stators, because of twist and camber, also serve as guide vanes to eliminate the slipstream rotation resulting from the high thrust loading of the ducted propeller. This flow straightening converts the rotational kinetic energy to pressure and increased axial velocity. If flow straightening is not provided, the propeller efficiency is severely reduced.

Propeller Twist

The effect of propeller twist on static performance has been a source of controversy. The results reported in references 12 and 64 indicate that a relatively flat, untwisted blade is best for static and low-speed operation, because of the better match with the theoretical ring vortex circulation about the duct, resulting in gains in static efficiency. However, these reports make no statement regarding blade pitch optimization, and it is difficult to distinguish between the effects of blade twist and those of blade pitch. On the other hand, the results reported in references 19 and 56, which did use blade pitch optimization, show no such corresponding improvement and indicate that blade twist is relatively unimportant. Moser and Livingston, in reference 70, also indicate that the effects of blade twist are relatively unimportant except at the highest collective pitch tested.

Propeller Tip Clearance

Ducted-propeller efficiency increases with decreasing tip clearance. Excessive tip clearance will aggravate a condition of flow reversal that occurs on the duct in the propeller plane even for small tip clearances. At moderate to high angles of attack, the flow reversal condition on the lower inside surface of the duct can cause premature inlet lip separation, resulting in reductions in both lift and pitching moment accompanied by increased power requirements.

Propeller Position

The effect of propeller position on ducted-propeller forces and moments in nonaxial flow is relatively undefined. Reference 19 indicates that at a given thrust level, moving the propeller forward reduces the lift and pitching-moment coefficients. However, data of reference 57 indicate that forward movement of the propeller plane increases the radial variation in duct velocity distribution (greater velocities near the duct), which would be expected to increase the pitching moments in nonaxial flow.

It is stated in reference 55 that analytical results indicate that in axial flow the pressure jump acting upon the internal duct surface downstream of the propeller plane is maximum when the propeller plane is located at the minimum duct internal cross-sectional area. For this location of the propeller in axial flow, the disk area and disk thrust are minimum for a given disk loading, and the duct-to-disk thrust ratio and the propulsive efficiency are maximum.

Exit-Velocity Ratio and Angle of Attack

The exit-velocity ratio and angle of attack determine the basic flow pattern for a given ducted propeller. As the duct angle of attack is increased beyond the unpowered stall angle, the exit-velocity ratio must be increased to prevent stalling of the duct lower leading edge. Because of the predominance of power effects as duct angle of attack is increased, the separation that occurs on the top aft portion of the duct usually has a minor effect on force and moment data.

Reynolds Number

Reynolds-number effects are of extreme importance in ducted-propeller design because of the low airspeed of operation and the short streamwise lengths of ducted-propeller elements. The separation that occurs on the lower inside surface of the duct leading edge at high angles of attack and low exit-velocity ratios is a low Reynolds-number characteristic. At low Reynolds number, laminar flow is followed by separation rather than by attached turbulent flow, resulting in substantial losses in both lift and pitching moment at a given power setting.

A comprehensive tabulation of pertinent ducted-propeller experimental data in the nonaxial flow regime is presented as table 9.3-A. This table provides a brief outline of the test data contained in each report and indicates the basic parametric changes. Similar tables pertaining to the static- and axial-flow regimes are given in reference 84. It should be recognized that the ducted propeller problem cannot be satisfactorily handled by treating isolated effects with all other variables fixed. The effect of a geometric or aerodynamic variation on the characteristics of a ducted propeller of different design will very likely be quite different from that indicated by the test results of available reports.

A general notation list is included in this section for all ducted propeller sections. Figures 9.3-12 and 9.3-13 illustrate the geometric data required by the methods of these sections. Figure 9.3-13 also illustrates the positive sense of forces, moments, and angles.

NOTATION

A_D duct aspect ratio, $\frac{d_e}{c}$

c duct chord, ft

C_{D_e} external duct drag coefficient, $\frac{-F_{x_e}}{q_\infty S_D}$

C_{F_x} duct negative-drag coefficient, $\frac{F_x}{q_\infty S_D}$

- $C_{F_{x_e}}$ external duct negative-drag coefficient, $\frac{F_{x_e}}{q_\infty S_D}$
- C_L duct lift coefficient, $\frac{L}{q_\infty S_D}$
- C_m duct pitching-moment coefficient, $\frac{M}{q_\infty S_D c}$
- d_{CB} duct center-body diameter at the exit plane, ft
- d_e duct exit diameter, ft
- d_p propeller diameter, ft
- F_x duct negative-drag force, lb ($F_x = C_{F_x} q_\infty S_D$)
- J advance ratio, $\frac{V_\infty}{nd_p}$
- L duct lift force, lb ($L = C_L q_\infty S_D$)
- M duct pitching moment, ft-lb ($M = C_m q_\infty S_D c$)
- m_i duct internal mass flow, $\frac{\text{slugs}}{\text{sec}}$
- N ducted-propeller normal force, lb
- n propeller rotational speed, rps
- q_∞ free-stream dynamic pressure, $\frac{\text{lb}}{\text{sq ft}}$
- S_D duct planform area, sq ft ($S_D = d_e c$)
- T ducted-propeller thrust, lb
- T_i total internal thrust, lb
- T_{net} total net thrust, lb ($T_{\text{net}} = T_i - C_{D_e} q_\infty S_D$)

V_e	duct exit velocity, $\frac{\text{ft}}{\text{sec}}$
V_i	velocity increment of internal mass flow due to power, $\frac{\text{ft}}{\text{sec}}$
V_{i_0}	internal mass-flow velocity with power off, $\frac{\text{ft}}{\text{sec}}$
V_∞	free-stream velocity, $\frac{\text{ft}}{\text{sec}}$
$\frac{V_e}{V_\infty}$	exit-velocity ratio
\bar{x}	chordwise distance from the reference center to the unstalled duct center of pressure, positive for the center of pressure ahead of the reference center, ft
x_{cp}	chordwise distance from the duct leading edge to the center of pressure of the unstalled duct, positive aft of the duct leading edge, ft
x_m	chordwise distance from the duct leading edge to the reference center, positive aft of the duct leading edge, ft
α_D	angle of attack between duct axis and free-stream direction, deg
δ_{i_f}	net turning angle of the internal flow including power effects, deg
δ_{i_0}	turning angle of the internal flow with power off, deg

REFERENCES

1. Anon.: Aerial Jeep Phase I, Final Report Vol. I and II. Aerophysics Development Corp. Report 520-3/R24/46, 1957. (U)
2. Anon.: Comparative Performance Charts for Ducted Propellers. Hiller Aircraft Corp. Report ARD-257, 1960. (U)
3. Anon.: Full Scale Wind Tunnel Test Report. G. E. Report 153, 1966. (U)
4. Anon.: Theoretical Investigation and Examination by Measuring Tests of the Thrust Control by Rudders Uniformly Tilted at the Outlet of a Duct. Bureau Technique Zborowski, 1959. (U)
5. Anon.: Wind-Tunnel-Test Report, Lift-Fan Powered Scale Model. G. E. Report 137, 1963. (U)
6. Anon.: XV-5A Lift-Fan Flight-Research Aircraft Program; Estimated Dynamic Stability Characteristics. G. E. Report 151, 1964. (U)
7. Beilman, J. L.: X-22A Variable Stability System. Presented at First National V/STOL Symposium, Nov. 1965. (U)

8. Black, D. M., Wainauski, H. S., and Rohrbech, C.: Shrouded Propellers – A Comprehensive Performance Study. AIAA Paper 68-994, 1968. (U)
9. Black, D. M. and Wainauski, H. S.: Shrouded-Propeller Test Program Data Analysis. Hamilton Standard Report HSER 4348, Vol. 1, 1967. (U)
10. Cahn, M. S.: The Design and Performance of Shrouded Propellers. SAE Preprint 587C, 1962. (U)
11. Clancy, G., and Cowgill, R.: Truck Test Stand Tests of Hiller Airborne Personnel Platform. Phase II. Hiller Aircraft Corporation, Eng. Report 680.2, 1955. (U)
12. Colton, R. F.: Preliminary Engineering Report on the .4 Scale Aerodyne Model Static Tests. Collins Aeronautical Research Laboratory, Report CER-924, 1959. (U)
13. Curtiss, H. C., Jr., and Struble, R. W.: Downwash Tests of the Dual-Tandem Ducted-Propeller VTOL Research Aircraft Configurations to Evaluate Engine Inlets, Protection Devices and Study Aerodynamic Interference. Kellert Aircraft Corp. Report 179T80-12, 1965. (U)
14. Curtiss, H. C., Jr.: Dynamic Stability of V/STOL Aircraft at Low Speeds. AIAA Paper 69-194, 1969. (U)
15. Davenport, E. E., and Spreemann, K. P.: Transition Characteristics of a VTOL Aircraft Powered by Four Ducted-Tandem Propellers. NASA TN D-2254, 1964. (U)
16. Duvivier, J. F., and McCallum, R. B.: Investigation of Tilting-Duct and Fan-Wing in Transition Flight. TREC TR-61-19, 1960. (U)
17. Finnstad, R. L., Welter, W. L., Ferrell, K. R., et al: Engineering Flight Research Evaluation of the XV-5A Lift-Fan Aircraft – Part I, Stability and Control, Final Report. USATREC Project 4-5-1220-01, Part 1, 1966. (U)
18. Fletcher, H. S.: Experimental Investigation of Lift, Drag, and Pitching Moment of Five Annular Airfoils. NACA TN 4117, 1957. (U)
19. Gill, W. J.: Wind-Tunnel Tests of Several Ducted Propellers in Non-Axial Flow. Hiller Aircraft Corp. Report ARD-224, 1959. (U)
20. Gill, W. J.: Airborne Personnel Platform. Hiller Aircraft Corp. Report ARD-236, 1959. (U)
21. Giulianetti, D. J., Biggers, J. C., and Maki, R. L.: Longitudinal Aerodynamic Characteristics in Ground Effect of a Large-Scale, V/STOL Model with Four Tilting Ducted Fans Arranged in a Dual Tandem Configuration. NASA TN D-4218, 1967. (U)
22. Giulianetti, D. J., Biggers, J. C., et al: Longitudinal and Lateral-Directional Aerodynamic Characteristics of a Large-Scale, V/STOL Model with Four Tilting Ducted Fans Arranged in a Dual Tandem Configuration. NASA TN D-3490, 1966. (U)
23. Goodson, K. W., and Grunwald, K. J.: Aerodynamic Characteristics of a Powered Semispan Tilting Shrouded Propeller VTOL Model in Hovering and Transition Flight. NASA TN D-981, 1962. (U)
24. Gorton, J. V., and Hamel, L. A.: Aerial Jeep Vehicle Project – Phase I, Final Report. Chrysler Corporation, Contract DA44-177-TC-448, 1958. (U)
25. Greenberg, M. D., and Ordway, D. E.: The Ducted Propeller in Static and Low-Speed Flight. Therm Advanced Research TAR-TR-6407, 1964. (U)
26. Greenberg, M. D., Ordway, D. E., and Lo, C. F.: A Three-Dimensional Theory for the Ducted Propeller at Angle of Attack. Therm Advanced Research TAR-TR-6509, 1965. (U)
27. Grose, R. M.: Wind-Tunnel Tests of Shrouded Propellers at Mach Numbers from 0 to .6. WADC TR 58-604, 1958. (U)
28. Grunwald, K. J., and Goodson, K. W.: Aerodynamic Loads on an Isolated Shrouded-Propeller Configuration for Angles of Attack from -10° to 110° . NASA TN D-995, 1962. (U)
29. Grunwald, K. J., and Goodson, K. W.: Division of Aerodynamic Loads on a Semispan Tilting-Ducted-Propeller Model in Hovering and Transition Flight. NASA TN D-1257, 1962. (U)

30. Halley, D. H.: The Development of a Simplified Analytical Approach for Evaluation of the Dynamic Stability Characteristics of a Ducted-Propeller VTOL Aircraft in Transition. Princeton Univ. Aerospace and Mech. Sci. Report 850, 1968. (U)
31. Ham, N. D., and Moser, H. H.: Preliminary Investigation of a Ducted Fan in Lifting Forward Flight. IAS Preprint 827, 1958. (U)
32. Hesby, A., and Sherman, E. W., Jr.: Wind-Tunnel-Test Data Report for the Full-Scale Powered-Duct Model. Bell Aerosystems R-2127-921007, 1965. (U)
33. Hoehne, V. O.: Investigation of Shrouded Propellers, Progress Report for 1 December 1957 through 31 December 1957. University of Wichita, Dept. of Eng. Research Report 305, 1958. (U)
34. Hoehne, V. O., and Monical, R. E.: A Method of Design of Shrouded Propellers. University of Wichita, Dept. of Eng. Research Report 213-8, 1959. (U)
35. Hoehne, V. O.: Progress Report for 1 July 1956 through 31 October 1957 on Wind-Tunnel Investigation of Shrouded Propellers. University of Wichita, Dept. of Eng. Research Report 300, 1957. (U)
36. Hoehne, V. O.: Shrouded Propeller Investigations: Aerodynamic Characteristics of a Shroud with Centerbody. University of Wichita, Dept. of Eng. Research Report No. 337, 1959. (U)
37. Hoehne, V. O.: Shrouded Propeller Investigations: Shroud and Centerbody Pressure Distributions of a Shrouded Propeller with a 17-Bladed Rotor, Inlet and Exit Stators and Long-Chord Shroud. University of Wichita, Dept. of Eng. Research Report No. 213-9, 1959. (U)
38. Hoehne, V. O.: Shrouded Propeller Investigations: Shroud and Centerbody Pressure Distributions of a Shrouded Propeller with a 10-Bladed Rotor, Exit Stators and Long-Chord Shroud. University of Wichita, Dept. of Eng. Research Report No. 213-10, 1960. (U)
39. Hoehne, V. O., and Wattson, R. K., Jr.: Shrouded Propeller Investigations: Static Performance of Two Highly-Loaded Shrouded Propellers as Measured in the Walter H. Beech Memorial Wind Tunnel. University of Wichita, Dept. of Eng. Research Report No. 213-4, 1958. (U)
40. Hoehne, V. O.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 17-Bladed Rotor, Inlet and Exit Stators, and Long-Chord Shroud with Modified Static Inlet and No Diffusion. University of Wichita, Dept. of Eng. Research Report No. 213-3, 1958. (U)
41. Hoehne, V. O., and Wattson, R. K., Jr.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 17-Bladed Rotor, Inlet and Exit Stators, and Long-Chord Shroud with Static Inlet and No Diffusion. University of Wichita, Dept. of Eng. Research Report No. 213-2, 1958. (U)
42. Hoehne, V. O., and Wattson, R. K., Jr.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 17-Bladed Rotor, Inlet and Exit Stators, and Long Shroud with High-Speed Inlet and No Exit Diffusion. University of Wichita, Dept. of Eng. Research, Report No. 213-1, 1958. (U)
43. Hoehne, V. O.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 10-Bladed Propeller, Exit Stators, and Long-Chord Shroud with High-Speed Inlet and No Exit Diffusion. University of Wichita, Dept. of Eng. Research Report No. 213-5, 1959. (U)
44. Hoehne, V. O.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 10-Bladed Propeller, Exit Stators, and Long-Chord Shroud with a Modified Static Inlet and No Diffusion. University of Wichita, Dept. of Eng. Research Report No. 213-7, 1959. (U)
45. Hoehne, V. O.: Shrouded Propeller Investigations: Wind-Tunnel Tests of a Shrouded Propeller with a 10-Bladed Propeller, Exit Stators, and Long-Chord Shroud with Static Inlet and No Diffusion. University of Wichita, Dept. of Eng. Research Report No. 213-6, 1959. (U)
46. Hoehne, V. O.: Shrouded Propeller Investigations: Wind Tunnel Tests of a 2-Bladed Shrouded-Propeller Model. University of Wichita, Dept. of Eng. Research Report No. 213-11, 1960. (U)
47. Hough, G. R., and Kaskel, A. L.: A Comparison of Ducted Propeller Theory with Bell X-22A Experimental Data. Therm Advanced Research Report TR-6510, 1965. (U)
48. Johnson, A. E.: Wind-Tunnel Investigation of the Effects of Thrust, Shroud Length, and Shroud Camber on the Static Stability Characteristics of Shrouded Propellers. DTMB Aero 1073, 1964. (U)

49. Kakol, S. J.: Flight Tests of the First Dual Tandem Ducted Fan V/STOL. Soc. of Experimental Test Pilots Annual Report to the Aerospace Profession (Tenth), 1968. (U)
50. Kelley, H. L., and Champine, R. A.: Flight Operating Problems and Aerodynamic and Performance Characteristics of a Fixed-Wing, Tilt-Duct, VTOL Research Aircraft. NASA TN D-1802, 1963. (U)
51. Key, D. L., and Reed, L. E.: VTOL Transition Dynamics and Equations of Motion with Application to the X-22A. CAL-TB-2312-F-1, 1968. (U)
52. Kriebel, A. R., and Mendenhall, M. R.: Predicted and Measured Performance of Two Full-Scale Ducted Propellers. NACA CR-578, 1966. (U)
53. Kriebel, A. R., Sacks, A. H., and Nielsen, J. N.: Theoretical Investigation of Dynamic Stability Derivatives of Ducted Propellers. Vidya TR 63-95, 1963. (U)
54. Kriebel, A. R.: Theoretical Investigation of Static Coefficients, Stability Derivatives, and Interference for Ducted Propellers. ITEK Report No. 112, 1964. (U)
55. Kriebel, A. R.: Theoretical Stability Derivatives for a Ducted Propeller. AIAA Preprint 64-170, Journal of Aircraft, Vol. 1, No. 4, 1964. (U)
56. Krüger, W.: On Wind Tunnel Tests and Computations Concerning the Problem of Shrouded Propellers. NACA TM 1202, 1949. (U)
57. Küchemann, D., and Weber, J.: Aerodynamics of Propulsion. McGraw-Hill Book Company, Inc., New York, 1956. (U)
58. Lippisch, A. M.: Theoretical Investigation of the Shrouded Propeller in Forward Flight. ONR, Air Branch, Contract No. NONr 701 (00). Collins Aeronautical Research Laboratory, 1954. (U)
59. Maguire, W. B.: A Wind-Tunnel Investigation of Some Short-Chord Low-Solidity Shrouded Propellers in the Cruise Condition. DTMB Aero-1083, 1964. (U)
60. Maki, R. L., and Giulianetti, D. J.: Aerodynamic Stability and Control of Ducted-Propeller Aircraft. Conf. on V/STOL and STOL Aircraft. NASA SP-116, 1966. (U)
61. McKinney, M. O., Parlett, L. R., and Newsom, W. A., Jr.: An Approach to Efficient Low-Speed Flight for Fan-Powered V/STOL Aircraft. Conf. on V/STOL and STOL Aircraft. NASA SP-116, 1966. (U)
62. McKinney, M. O., and Newsom, W. A.: Experimental Research on 4-Duct Tandem VTOL Aircraft Configurations. Amer. Helicopter Soc. Paper, 1962. (U)
63. McLemore, H. C., and Cannon, M. D.: Aerodynamic Investigation of a Four-Blade Propeller Operating Through an Angle-of-Attack Range from 0° to 180° . NASA TN 3228, 1954. (U)
64. McNay, D. E.: Study of the Effects of Various Propeller Configurations on the Flow About a Shroud. Mississippi State College, Research Report 14, 1958. (U)
65. Minassiar, B.: Analytical Study of Shrouded Propellers. Longren Aircraft Company, Rpt. Nos. Pr-2-4, 1955, Rpt. Nos. Pr-5, Lr-501, 1956. (U)
66. Monical R. E.: Progress Report for 1 January 1958 through 30 November 1958 on Wind-Tunnel Investigation of Shrouded Propellers. Univ. of Wichita, Dept. of Eng. Research Report 331, 1958. (U)
67. Mort, K. W., and Yaggy, P. J.: Aerodynamic Characteristics of a 4-Foot Diameter Ducted Fan Mounted on the Tip of a Semiopen Wing. NASA TN D-1301, 1962. (U)
68. Mort, K. W.: Summary of Large-Scale Tests of Ducted Fans. Conf. on V/STOL and STOL Aircraft. NASA SP-116, 1966. (U)
69. Mort, K. W., and Games, B.: A Wind-Tunnel Investigation of a 7-Foot-Diameter Ducted Propeller. NASA TN D-4142, 1967. (U)
70. Moser, H. H., and Livingston, C. L.: Experimental and Analytic Study of the Ducted Fan and Fan-in-Wing in Hovering and Forward Flight. MIT TR 79-1, 1959. (U)

71. Neal, B.: The Design and Testing of Three 6-Foot Diameter Ducted Propellers with Their Rotational Axes Normal to the Free Stream. NRC 8483, LR-426, 1965. (U)
72. Neal, B., and Slack, W. E.: Static and Low Forward-Speed Tests on Several Six-Foot-Diameter Tractor and Pusher Ducted Propellers. NRC LR-445, 1965. (U)
73. Newsom, W. A., Jr.: Aerodynamic Characteristics of Four-Duct Tandem VTOL-Aircraft Configurations. NASA TN D-1481, 1963. (U)
74. Newsom, W. A., Jr., and Freeman, D. C., Jr.: Flight Investigation of Stability and Control Characteristics of a 0.18-Scale Model of a Four-Duct Tandem V/STOL Transport. NASA TN D-3055, 1966. (U)
75. Newsom, W. A., Jr.: Wind-Tunnel Investigation of a Deflected-Slipstream Cruise-Fan V/STOL Aircraft Wing. NASA TN D-4262, 1967. (U)
76. Ordway, D. E., Sluyter, M. M., and Sonnerup, B. O. U.: Three-Dimensional Theory of Ducted Propellers. Therm Advanced Research TAR-TR-602, 1960. (U)
77. Parlett, L. P.: Aerodynamic Characteristics of a Small-Scale Shrouded Propeller at Angles of Attack from 0° to 90° . NACA TN 3547, 1955. (U)
78. Parlett, L. P.: Experimental Investigation of Some of the Parameters Related to the Stability and Control of Aerial Vehicles Supported by Ducted Fans. NASA TN D-616, 1960. (U)
79. Platt, R. J., Jr.: Static Tests of a Shrouded and an Unshrouded Propeller. NACA RM L7H25, 1948. (U)
80. Pruyn, R. A.: Effects of Airframe Geometry on Downwash Problems of Tandem Ducted-Propeller VTOL Aircraft. Kellett Aircraft Corp. Report 179T80-6, 1964. (U)
81. Putman, W. F., Traybar, J. J., et al: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 1, Phase 1, Hovering. Princeton Univ. Report 835, USAAVLABS TR-68-49A, 1968. (U)
82. Putman, W. F., and Traybar, J. J.: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 2, Phase 2, Longitudinal Dynamics at High Duct Incidence Data Report. Princeton Univ. Report 836, USAAVLABS TR-68-49B, 1968. (U)
83. Putman, W. F., Traybar, J. J., et al: An Investigation of the Dynamic Stability Characteristics of a Quad Configuration, Ducted-Propeller V/STOL Model - Volume 3, Phase 3, Lateral-Directional Dynamics at High Duct Incidences. USAAVLABS TR-68-49C, 1968. (U)
84. Sacks, A. H., and Burnell, J. A.: Ducted Propellers - A Critical Review of the State of the Art. Progress in Aeronautical Sciences, Vol. 3, edited by Ferri, A., Küchemann, D., and Stern, L. H. G., Pergamon Press, New York, 1962. (U)
85. Sacks, A. H.: The Flying Platform as a Research Vehicle for Ducted Propellers. IAS Preprint No. 832, 1958. (U)
86. Speth, R. F.: Aerodynamic Test Data Report for Ground Effect Model, X-22A. Bell Aerosystems Corp. Report 2127-921004, 1963. (U)
87. Spreemann, K. P.: Wind-Tunnel Investigation of Lateral Aerodynamic Characteristics of a Powered Four-Duct-Propeller VTOL Model in Transition. NASA TN D-4343, 1968. (U)
88. Spreemann, K. P.: Wind-Tunnel Investigation of Longitudinal Aerodynamic Characteristics of a Powered 4-Duct-Propeller VTOL Model in Transition. NASA TN D-3192, 1966. (U)
89. Stapleford, R. L., Wolkovitch, J., et al: An Analytical Study of V/STOL Handling Qualities in Hover and Transition. TR-140-1, AFFDL-TR-65-73, 1965. (U)
90. Tapscott, R. J., and Kelley, H. L.: A Flight Study of the Conversion Maneuver of the Tilt-Duct VTOL Aircraft. NASA TN D-372, 1960. (U)
91. Theodorsen, T.: Theoretical Investigation of Ducted-Propeller Aerodynamics, Vol. I. Dept. National Defense, DOD Tech. Library Account 71999, 1960. (U)

92. Theodorsen, T.: Theoretical Investigation of Ducted-Propeller Aerodynamics, Vol. II. Dept. National Defense, DOD Tech. Library Account 72000, 1960. (U)
93. Thompson, J. F., Jr.: An Experimental Investigation of the Effect of Forward and Rearward Motion on the Thrust of a Shrouded Propeller. Miss. State Univ. RR-65, USAAVLABS TR-66-65, 1966. (U)
94. Wainauski, H. S.: Variable-Geometry Shrouded-Propeller Test Program. Vol. 1. Data Analysis. HSER-5062, Vol. 1, 1968. (U)
95. Wattson, R. K., Jr.: Shrouded Propeller Investigations at the University of Wichita. University of Wichita, Dept. of Eng. Research Report No. 306, 1958. (U)
96. Yaggy, P. F., and Goodson, K. W.: Aerodynamics of a Tilting-Ducted Fan Configuration. NASA TN D-785, 1961. (U)
97. Yaggy, P. F., and Mort, K. W.: A Wind-Tunnel Investigation of a 4-Foot Diameter Ducted Fan Mounted on the Tip of a Semispan Wing. NASA TN D-776, 1961. (U)

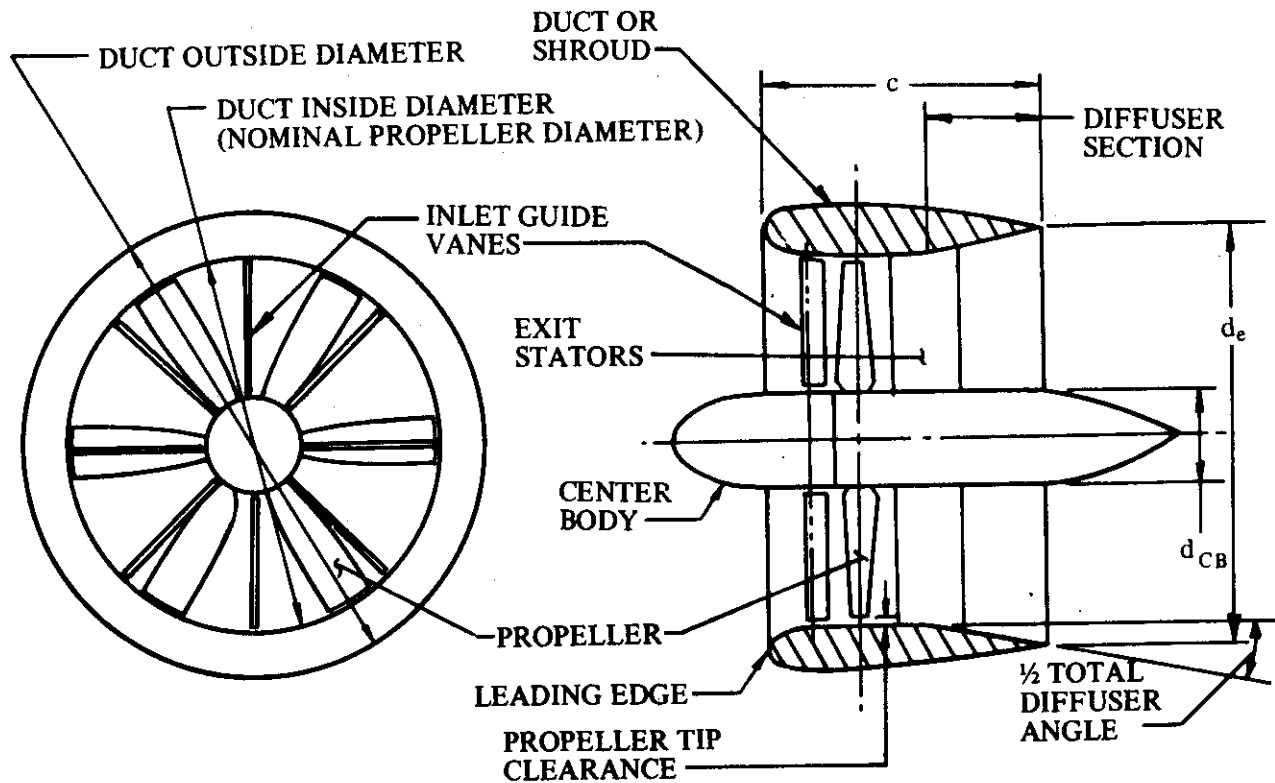


FIGURE 9.3-12 DUCTED-PROPELLER GEOMETRY

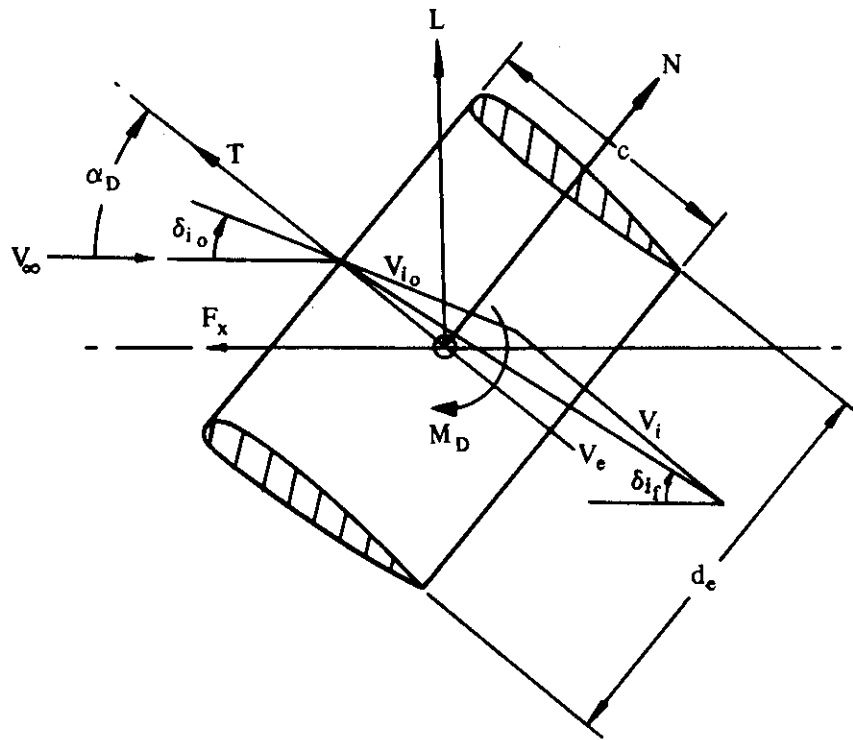


FIGURE 9.3-13 DEFINITION SKETCH FOR DUCTED-PROPELLER FLOW GEOMETRY – WIND-AXIS SYSTEM

TABLE 9.3.A
SUMMARY OF EXPERIMENTAL DUCTED PROPELLER DATA
NON-AXIAL FLOW

REFERENCE NO.	YEAR OF PUBLICATION	GEOMETRY				TUNNEL DATA				TEST CONDITIONS				DATA IN ADDITION TO L, D, M, RPM, & POWER				COMMENTS			
		DUCT SHAPE*	DUCT ASPECT RATIO	TOTAL NO. PROP. BLADES	PROP. DIAM. (FT)	PROP. DISK AREA (%)	MIN. m_1 TUNNEL (%)	MAX. m_1 TUNNEL (%)	% RANGE	MAX. TESTED B/OX DESIGN DISK LOADING (LB/FT ²)	MAX. V/V_∞	MAX. ADVANCE RATIO J	R_1 RANGE $\times 10^{-4}$	DUCT FORCE MOMENTS	PROP. PRESS. MOMENTS	VELOCITY SURVEY	STATIC DATA		PROP. REMOVED DATA	EXIT-VANE TESTS	INLET GUIDE VANE TEST
2	80	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X	X	X	X	X	REVIEW AND CONSTRUCTION OF COMPARATIVE PERFORMANCE CHARTS USING DATA FROM A NUMBER OF OTHER REFERENCES. LIST, HOVERING, TRANSITION, AND CRUISE 2-DIMENSIONAL WATER-FLOW STUDIES.
8	68	MA	1.575, 1.647, 1.714, 2.103	3.4	2.5	1.83, 9.26	-	-	-	~2	-	-	X	X	X	X	X	X	X	X	SINGLE SHROUDED PROPELLER TESTED IN UAC 18FT OCTAGONAL TUNNEL FOR HOVER UP TO M=2 AND IN 8FT TUNNEL FOR CRUISE. BLADE PITCH 20° - 50° DIFFUSION ANGLE NOT GIVEN. PROPELLER POSITION FOR CRUISE TESTS. EXIT-VANE ANGLE, LIFT, DRAG, AND TIP CLEARANCE. PROPELLER PARAMETERS SUCH AS PLANFORM DISTRIBUTION, NO. OF BLADES, AND TIP CLEARANCE. PRESSURE AND VELOCITY DATA USED TO COMPUTE PROP. PRESS. DATA SHOW EFFECT OF BLADE ANGLE ON LIFT, DRAG, AND TIP CLEARANCE. EXIT VELOCITIES GIVEN FOR BASIC CONFIG AND ALSO TO SHOW EFFECT OF VARYING INLET DUCT ANGLE, MACH NO., DUCT EXIT AREA, DUCT CHORD LENGTH, INLET VANES, TIP CLEARANCE, NO. OF BLADES, AND PROP. PLANFORM.
9	67	MA	1.575, 1.647, 1.714, 2.103	3.4	2.5	1.83, 9.26	-	-	1.876 -1.08	-	-	-	X	X	X	X	X	X	X	X	SAME CONFIG. AS ABOVE. 15°-45° BLADE THICK. DIFFUSION VARIED UP TO 12° (HALF-ANGLE) POWER SURVEY. THRUST DATA ONLY. EFFECTS ON PERFORMANCE OF DUCTED PROPELLER. CHORD LENGTH, PROPELLER POSITION, SHROUD EXTERNAL SHAPE, INLET-VANE ANGLE, EXIT-VANE ANGLE, AND TIP CLEARANCE. PROPELLER PARAMETERS, SUCH AS PLANFORM DISTRIBUTION, NO. OF BLADES, AND TIP CLEARANCE. PRESSURE AND VELOCITY DATA USED TO COMPUTE PROP. PRESS. DATA SHOW EFFECT OF BLADE ANGLE ON LIFT, DRAG, AND TIP CLEARANCE. EXIT VELOCITIES GIVEN FOR BASIC CONFIG AND ALSO TO SHOW EFFECT OF VARYING INLET DUCT ANGLE, MACH NO., DUCT EXIT AREA, DUCT CHORD LENGTH, INLET VANES, TIP CLEARANCE, NO. OF BLADES, AND PROP. PLANFORM.
10	62	-	-	3	2.5	-	-	-	-	-	-	X	X	X	X	X	X	X	X	A DUCTED PROPELLER WITH FORWARD AND AFT GUIDE VANES AND BLC TESTED IN UAC TUNNEL, HAMILTON STANDARD VARIABLE CAMBER PROPELLER DIFFUSION ANGLE (HALF-ANGLE) AND 30° WITH BLC. PROP. EFF. PLOTS, THRUST FOR DUCT, PROP. AND TOTAL ADVANTAGES OF DUCTED PROPELLER, METHODS OF DETERMINING PERFORMANCE, AND TEST DATA VERIFYING PREDICTED PERFORMANCE. HOVER, CRUISE, AND TRANSITION.	
13	65	MA	2.26	3	8	-	0.90°	76.5	-	-	-	X	X	X	X	X	X	X	X	FULL-SCALE HALF-MODEL SIMULATION OF DUAL TANDEM DUCTED-PROP. VTOL AIRCRAFT TESTED OVER SAND AND STONE TO TEST ENGINE PROTECTIVE DEVICES. ISOLATED DUCT ALSO TESTED. 19°, 22°, 26° BLADE PITCH. DIFFUSION ANGLE NOT GIVEN. GROUND EFFECT. STATIC EFFECTS OF PROPELLER BLADE ANGLE, DUCT HEIGHT, POWER, AND DISTANCE BETWEEN DUCTS. THRUST, LIFT, DRAG, AND TIP CLEARANCE. PROP. PRESS. DATA. APPENDIX INCLUDES PROP. BLADE STRESS STUDIES MADE IN KELLET DOWNWASH TEST FACILITY. EFFECTS OF GROUND AND ADJACENT COMPONENTS ON VIBRATORY STRESSES ON BLADES OF DUCTED PROP.	
14	68	MA	1.90	3	1.017	-	80°-90°	-	-	-	-	X	X	X	X	X	X	X	X	3 TILTING CONFIG. LONG STABILITY CHAR (HORIZ. FORCE, VERTICAL-FORCE, PITCHING, AND VELOCITY) MEASURED. HOVER AND TRANSITION. EG FOR DERIVS.	
15	64	MA	1.77	4	1.146	-	0°-90°	-	-	-	-	X	X	X	X	X	X	X	X	VTOL CONFIG WITH 4 TILTING DUCTED PROPELLERS IN TANDEM. LIFT, LONG. FORCE AND PITCHING MOMENTS, RPM MEASURED. DIFFUSION ANGLE NOT GIVEN. EFFECT OF DIFFERENTIAL TILTING ON DIFFERENTIAL INCIDENCE ON AERO STAB AND CONTROL CHAR IN TRANSITION. TUFT GRID PICTURES.	
16	60	BM	2.88	2	1.5	-	-10°-90°	-	-	-	-	-	X	X	X	X	X	X	X	A TILTING DUCTED PROP AND A FAN-INWING IN MIT 7-1/2 x 10-FT TUNNEL. INCREMENTS IN LIFT, DRAG, AND PITCHING MOMENT, AND POWER COEFFICIENT TABULATED FOR TILT ANGLES MASS FLOW VARIABLES. MASS FLOW, MASS FLOW COEFFICIENT, NO DIFFUSION, RPM MEASURED. TRANSITION REGIME. DUCT INFLOW VELOCITIES AND INLET PRESS. DISTRIB. TUFT STUDY.	
18	67	MA	2.52, 2.88, 1.9, 1.8, 3.0	0	-	-	-4°-90°	-	-	704-2.11	-	X	X	X	X	X	X	X	X	5. ANNULAR AIRFOILS OF EQUAL PROJECTED AREAS IN LANGLEY 8-1 BFT TUNNEL. NO DIFFUSION. LOW-SPEED STATIC LONG STAB CHAR. MAX. L/D, LIFT-CURVE SLOPES AND DRAG POLARS COMPARED WITH CALC. VALUES. TUFT GRID TESTS.	

*MA = Modified Airfoil; BM = Bellmouth; NBH = Notched Bellmouth; +D = Plus Diffuser; TWC = Thin Walled Cylinder

TABLE 9.3-A (CONTD)

REFERENCE NO.	YEAR OF PUBLICATION	DUCT SHAPE	GEOMETRY			TUNNEL DATA			TEST CONDITIONS				DATA IN ADDITION TO U, D, W, RPM, & POWER					COMMENTS
			DUCT ASPECT RATIO	TOTAL NO. PROP. BLADES	NOMINAL PROP. DIAM. (IN)	PROP. DISK AREA (%)	MIN. TUNNEL (%)	MAX. V / V _∞	MAX. ADVANCE RATIO	1/2 RANGE × 10 ⁻⁴	PROP. FORCES, MOMENTS	DUCT PRESS. DISTRIBUTION	VELOCITY SURVEY	STATIC DATA	PROP. REMOVED DATA	EXIT-VANE TESTS	INLET GUIDE VANE TEST	
16	MA MA-10 MA	4.0 4.0 6.0	4.5	2.0	0.93	6.8	0 → 90°	82/26	7.4	0.47	.072 → .37	X	X	X	X	X	2- AND 3-BLADED COUNTER ROTATING PROPELLERS. PROP. TWEET AND BLADE PITCH VARIED IN AMES 40- X 80-FT. TUNNEL. CENTER-BODY LENGTH, PROPELLER LOCATION AND EXIT-VANE EFFECTIVENESS INVESTIGATED. EXIT-VELOCITY SURVEY DATA. TEST POINTS PRIMARILY AROUND HORIZ-FOUR-EQUILIBRIUM CONDITION.	
20	MA	1.944	8	4	0.44	-	0 → 90°	-	-	0.96	-	X	X	X	X	X	SUMMARY PLOTS OF TRANSITION DATA FROM REF 19 AND STATIC TEST DATA OF A HIGH-ASPECT-RATIO DUCT (DUCT 9 OF REF 19).	
21	MA	1.944	8	4	0.44	-	0 → 90°	-	-	1.23	-	X	X	X	X	X	FULL-SCALE VISTOL MODEL WITH 4 TILTING DUCTED FANS IN DUAL-TANDEM ARRANGEMENT IN AMES 40- X 80-FT. TUNNEL. BLADE PITCH ANGLE 22° (AT TIP, 11° DIFFUSION ANGLE HALF-ANGLE) EFFECT OF GROUND HEIGHT ON LONG AERO CHAIR IN HOVER, TRANSITION, AND TAKE-OFF. EFFECTS OF DUCT DEFLECTIONS, FORWARD SPEEDS, AND ADVANCE RATIOS ON POWER AT VARIOUS DUCT DEFLECTIONS, FORWARD SPEEDS, AND ADVANCE RATIOS. PITCH CONTROL EFFECTIVENESS OF DUCT EXIT VANES.	
22	MA	1.944	8	4	0.44	-	20° → 90°	388.5/-	-	1.23	-	X	X	X	X	X	LARGE-SCALE VISTOL MODEL WITH 4 TILTING DUCTED FANS IN DUAL-TANDEM ARRANGEMENT IN AMES 40- BY 80-FT. TUNNEL. BLADE PITCH ANGLE 22° (AT TIP, 11° DIFFUSION HALF-ANGLE); RIM MEASURED. THRUST COEFF. OF ISOLATED DUCTED PROP AS FUNCTION OF ADVANCE RATIO AND DUCT INCIDENCE. EFFECTS ON LONG AERO CHAIR IN HOVER, TRANSITION, AND CRUISE. DUCT INCIDENCE, DIFFERENTIAL ONE-AFT DUCT INCIDENCE, MOMENT CENTER, FRONT DUCT INCIDENCE, DIFFERENTIAL ONE-AFT DUCT INCIDENCE, DIFFERENTIAL LEFT-RIGHT RATIOS, AND DUCT INCIDENCES EFF. OF SUGAR VERTICAL TAIL DIFFERENTIAL LEFT-RIGHT DUCT EXIT-VANE DEFLECTION ON LAT-OIR AERO CHAIR AT VARIOUS ADVANCE RATIOS AND DUCT INCIDENCES. DUCT INCIDENCE, POWER, AND DIFFERENTIAL EXIT-VANE DEFLECTIONS REQ. FOR TRANSITION. MAX. DESCENT VELOCITIES AND DUCT STALL MARGINS IN TRANSITION. CONTROL POWER VARIATION WITH DUCT EXIT-VANE SETTINGS.	
23	MA	1.46	3	1.26	0.43	8.4	0 → 90°	26/-	18.0	0.80	.037 → .72	X	X	X	X	X	5/16-SCALE MODEL OF V24 DUCT AND SEMISPAN WING EXCEPT DUCT INTERNAL ELEMENTS (PROP. VANES, ETC.). ALL DATA INCLUDE WING LOADS. NO BLADE PITCH VARIATION. GROUND EFFECT DATA. SPINNER ROTATES. 11° DIFFUSION (HALF-ANGLE).	
27	MA, BM	2.0	4	2.5	9.5, 1.89	9.6	0 → 6°	37/- 103/-	1.04	4.3	1.4 → 4.2	X	X	X	X	X	NEARLY AXIAL FLOW. M=0 TO 0.8. DUCT LE AT OPEN END OF 18FT OCTAGONAL W/T TEST SECTION. PROP. NORMAL FORCE NOT MEASURED. ONLY STATIC DATA ON BELLMOUTH DUCT. BLADE PITCH VARIED. SPINNER ROTATES. 9° DIFFUSION. SHARP-RADIUS INLET.	
28	MA	1.04	3	1.26	0.43	8.2	-10° → 110°	26/-	19.2	.866	.042 → .76	X	X	X	X	X	5/16-SCALE MODEL OF V24 DUCT DIVISION OF LOADS BETWEEN PROP. AND DUCT. LOWER ADVANCE RATIOS TEST TO PREVENT SEPARATION. NO BLADE PITCH VARIATION. 11° DIFFUSION (HALF-ANGLE).	
28	MA, BM	1.74	6	1.12	0.34	4.6	0 → 90°	81/-	12.4	0.70	.088 → .70	X	X	X	X	X	SEMISPAN MODEL DIVISION OF LOADS INVESTIGATION. BELLMOUTH CONFIG IS A MODIFICATION OF MOD. AIRFOIL CONFIG. NO BLADE PITCH VARIATION. GROUND-EFFECT DATA. SPINNER ROTATES. 11° DIFFUSION.	
32	MA	1.80	3	7.0	.084	-	0 → 100°	-	-	2.1	-	X	X	X	X	X	FULL-SCALE DUCTED-FAN MODEL OF X-22A IN AMES 40- X 80-FT TUNNEL. TRANSITION, HOVER, AND CRUISE. BLADE ANGLE 16° - 50° (78R). 9° DIFFUSION (ONE SIDE). THRUST PRESS., LIFT, DRAG, AND PITCHING MOMENT. HINGE MOMENTS. EFF OF ELEVONS.	
35	BH	1.48, 2.0	-	-	-	-	0 → 60°	-	-	-	.54 → .73	X	X	X	X	X	PROGRESS REPT. DUCT OF REF 41 DISCUSSED. INLET-GUIDE VANE TEST PLOTS.	
36	MA, MA-10	2.0, 2.15	-	-	-	-	0 → 60°	-	-	-	-	X	X	X	X	X	PROPELLER-OUT DATA FOR MA DUCT OF REFS 42 AND 43, AND MA AND MA-10 DUCTS OF REF 46. HUB DIAMETER AND NOSE LENGTH INVESTIGATED.	
37	MA, MA, NBA	-	-	-	-	-	0 → 60°	-	-	-	-	X	X	X	X	X	DUCT AND CENTER-BODY SURFACE PRESSURE SURVEYS OF DUCTS OF REFS 40, 41, AND 42.	

*MA = Modified Airfoil; BA = Bellmouth; NBA = Notched Bellmouth; +D = Plus Diffuser; TWC = Thin Walled Cylinder

TABLE 9.3-A (CONTD)

REFERENCE NO.	YEAR OF PUBLICATION	GEOMETRY			TUNNEL DATA			TEST CONDITIONS					DATA IN ADDITION TO L, D, M, RPM, & POWER					COMMENTS			
		DUCT SHAPE*	DUCT ASPECT RATIO	TOTAL NO PROP BLADES	PROP. DIAM (FT)	PROP. DISK AREA (%)	MIN. TUNNEL (%)	MAX. TUNNEL (%)	° RANGE	MAX TESTED & /OR DESIGN DISK LOADING (LB/FT ²)	MAX V / V∞	MAX. ADVANCE RATIO J	R RANGE x 10 ⁻⁴	DUCT FORCE MOMENTS	PROP. FORCE MOMENTS	VELOCITY DISTRIBUTION	STATIC SURVEY		PROP. REMOVED DATA	EXT. VANE TESTS	INLET GUIDE VANE TEST
54	MA	(a) 10.2 (b) 17.6	2.3	2	-	-	-	-10° → 10°	-	-	-	-	X	-	-	-	-	-	-	-	2 DUCTS, EACH TESTED WITH 2 PROPS IN DTMS & x 10-FT TUNNEL. 15° → 35° BLADE PITCH ANGLE. DIFFUSION ANGLE NOT GIVEN. CRUISE, LIFT, PITCHING MOMENT, THRUST, PROPULSIVE EFFICIENCY.
55	MA	-	5	(a) 4 (b) 1.2	(a) .44 (b) -	-	150 → 700	-	1.30	-	-	X	-	-	-	-	X	-	-	-	LARGE DUAL-TANDER, TILTING DUCTED-PROPELLER VTOL MODEL OF DOAK VZ-40A IN AMES FULL-SCALE TUNNEL, AND A .56-SCALE MODEL OF THE SAME IN THE LANGLEY TUNNEL. DIFFUSION ANGLE NOT GIVEN. PITCHING MOMENT IN TRANSITION, SIDE-FORCE, YAWING MOMENT, AND ROLL-YAW COUPLING. DUCT ANGLE AND POWER REQUIRED AS FUNCTION OF FLIGHT SPEED. GROUND EFFECT. SOME DATA IN HOVER AND CRUISE ALSO.
56	-	-	-	0.5	-	-	-	-	-	-	-	X	-	-	-	-	-	-	-	-	SEMISPAN MODEL WITH 2 DUCTED PROPELLERS MOUNTED AHEAD OF A WING WITH DOUBLE-SLOTTED FLAPS IN LANGLEY TUNNEL. DIFFUSION ANGLE NOT GIVEN. EFFECTS OF EXHAUST SPLIT, SLIPSTREAM DEFLECTION, AND FENCES ON LIFT-THRUST AND DRAG-THRUST RATIOS IN HOVER. EFFECT OF FENCES ON JET-INDUCED LIFT. THRUST REQUIRED IN TRANSITION.
57	MA	-	4	5.33	-	-	0 → 180°	-	-	-	0 → 1.8	X	-	-	-	-	-	-	-	-	1/3-SCALE MODEL PROPELLER IN LANGLEY FULL-SCALE TUNNEL. EFFECT OF BLADE ANGLE (0 → 70° AT .76R) ON THRUST AND POWER COEFF IN HOVER. EFFECTS OF BLADE ANGLE (0 → 67.6°), ADVANCE RATIO, AND PROP ANGLE OF ATTACK ON THRUST AND POWER COEFF. CENTR. PROPELLER EFFICIENCY, NORMAL-FORCE TAWING-MOMENT, AND PITCHING-MOMENT RATIOS. TOTAL LIFT, DRAG, AND PITCHING MOMENT. EFFECTS OF BLADE ANGLE, ADVANCE RATIO, AND ANGLES OF ATTACK, CRUISE, TRANSITION, AND HOVER.
58	MA	-	8	4.0	0.26	1.8	0 → 90°	125/100	4.8	0.91	.86 → 3.07	-	-	-	-	-	-	-	-	-	VZ4 SEMISPAN WING PLUS DUCT (PROTOTYPE COMPONENTS). DUCT AND DUCTING DATA GIVEN. LIFT, DRAG, AND PITCHING MOMENT. DUCT STALL BOUNDARIES DEFINED. 2 BLADE PITCH ANGLES TESTED. 11° DIFFUSION (HALF-ANGLE).
59	-	-	(a) 1 (b) 3 (c) 5	-	-	-	-	-	-	1.2	-	X	X	X	X	X	X	X	X	X	3 SIZES OF ISOLATED DUCTED PROPELLERS IN AMES TUNNEL, THE 7-FT PROPELLER A FULL-SCALE MODEL OF THOSE IN X-22A, THE 3-FT PROPELLER WITH 3 LPS, VARIABLE BLADE ANGLE, AND THE 1-FT PROPELLER WITH 3 LPS. EFFECTS OF BLADE ANGLE, ADVANCE RATIO, AND DRAG FOR 3 PROPELLERS AND TESTS ON THE EFFECT OF BLADE ANGLE ON THRUST AND POWER COEFFICIENTS AND ON STATIC PERFORMANCE. DUCT ANGLE OF ATTACK FOR INNER AND OUTER TIP STALL.
60	MA	-	3	7	1.40	-	0 → 90°	-	-	2.17	-	X	X	X	X	X	X	X	X	X	LARGE-SCALE DUCTED PROPELLERS LIKE THOSE ON BELL X-22A TESTED IN AMES 40- x .80-FT TUNNEL. 10-FT PROPELLER WITH 3 LPS. EFFECTS OF BLADE ANGLE, ADVANCE RATIO, POWER COEFF, AND PROPULSIVE EFFICIENCY FOR RANGE OF BLADE ANGLES AND ADVANCE RATIOS. TOTAL LIFT, DRAG, AND PITCHING MOMENT, ALSO WITH PROP REMOVED. STATIC EFFICIENCY SHOWN AS FIGURE OF MERIT. THRUST VALUES COMPARED WITH THEORY. DUCT LIP STALL.
61	BM	3.0	2	1.5	3.22	10.9	70° → 100°	23-	3.4	0.27	.08 → 0.14	-	X	X	X	X	X	X	X	X	ARTICULATED BLADES WITH OFFSET LAG HINGES, BLUNT, AFTERBODY, NO SPINNER. ANALYSIS OF DUCTED PROPS. BLADE PITCH VARIED. NO DIFFUSION. GROUND-EFFECT DATA.
62	MA	(a) 2.0 (b) 2.7 (c) 2.3 (d) 2.5 (e) 2.5	2	6	-	-	90°	(a) 28.8/- (b) 26.8/- (c) 26.0/- (d) 24.1/- (e) 21.8/-	-	-	-	X	X	X	X	X	X	X	X	X	FULL-SCALE DUCT AND 3 PROPELLERS ON MOBILE TEST RIG. BLADE PITCH AT .76R FOR (a) 2.0, (b) 2.7, (c) 2.3, (d) 2.5, (e) 2.5. ADVANCE RATIO 0.5. EFFECTS OF BLADE ANGLE, ADVANCE RATIO, THRUST, AND FOR PROP ALONE. EFFECTS OF PITCHING MOMENT, THRUST, AND ADVANCE RATIO ON THRUST VECTORED VANES. DUCT LIP EXTENSION, TIP CLEARANCE, BLADE TWIST AND GROUND PROXIMITY. DUCT PRESSURES COMPARED WITH THEORY. EFFECT OF VANES ON AIR-TURNING ANGLE. HOVER CONDITION.
63	MA	(a) 2.0 (b) 2.7 (c) 2.3 (d) 2.5 (e) 2.5	2	6	-	-	6°, 6°	(a) 28.8/- (b) 26.8/- (c) 26.0/- (d) 24.1/- (e) 21.8/-	-	-	-	X	X	X	X	X	X	X	X	X	TRACTOR AND PUSHER DUCTED PROPELLERS WITH 4 PROPELLERS IN MAE MOBILE TEST RIG. TRACTOR DUCTS HAVE MODIFIED LE AND 60° AND 100° DIFFUSION (HALF-ANGLE) PUSHER DUCTS OF 5.7 PERCENT THICKNESS-DIAM RATIO HAVE 30° DIFFUSION (HALF-ANGLE). OF 8.3 PERCENT THICKNESS-DIAM RATIO. B' AND 10° DIFFUSION (HALF-ANGLE). BLADE TWIST. RPM MEASURED. HOVER AND CRUISE CONDITIONS. THRUST FOR DUCTED AND PROP. ALONE AND COMBINED. EFFECTS OF BLADE ANGLE, ADVANCE RATIO, AND MOD LE, INCIDENCE, PROP LOCATION, TIP CLEARANCE, AND TIP CHORD OF BLADES.

*MA = Modified Airfoil; BM = Bellmouth; NEM = Notched Bellmouth; † D = Plus Diffuser; TWC = Thin Walled Cylinder

TABLE 9.3-A (CONT'D)

REFERENCE NO.	YEAR OF PUBLICATION	GEOMETRY			TUNNEL DATA			TEST CONDITIONS				DATA IN ADDITION TO L, D, W, RPM, & POWER				COMMENTS
		DUCT SHAPE*	DUCT ASPECT RATIO	TOTAL NO. PROP. BLADES	NOMINAL PROP. DIAM. (M)	PROP. DISK AREA (%)	MIN. THROTTLE (%)	MAX. V ₀ / V _∞	MAX. ADVANCE RATIO	R ₁ RANGE x 10 ⁻⁴	DUCT FORCE MOMENTS	PROP. FORCE MOMENTS	VELOCITY DISTRIBUTION	STATIC SURVEY	PROP. REMOVED DATA	
72	63	MA	4	1.37	1.146	-	0-76	-	-	-	-	-	-	-	-	X
74	66	MA	4	1.30	-	-	0-80	-	-	-	-	-	-	-	-	-
76	67	MA	4	-	0.5	-	0-20	-	-	-	-	-	-	-	-	-
77	55	TWC	2	1.47	1.46	9.6	0-90	3.4-	6.4	213	.066 → .53	-	-	-	-	X
78	60	BM	2.33	2.33	0.24	4.1	80-90	8.9-	17.4	.84	.017 → .20	-	-	-	-	X
79	48	MA	12	4	-	-	-	(a) 107/- (b) 119/- (c) -	-	-	-	-	-	-	-	-
80	64	MA	3	2.26	-	-	75-105	80-	-	-	-	-	-	-	-	-
81	68	MA	3	1.30	-	-	40-80	-	-	.44	-	-	-	-	-	-
82	66	MA	3	1.90	-	-	-	-	-	-	-	-	-	-	-	-
83	68	MA	3	1.30	-	-	-	-	-	-	-	-	-	-	-	-

*MA = Modified Airfoil; BM = Bellmouth; NBM = Notched Bellmouth; +D = Plus Diffuser; TWC = Thin Walled Cylinder

TABLE 9.3-A (CONTD)

REFERENCE NO.	YEAR OF PUBLICATION	GEOMETRY				TUNNEL DATA				TEST CONDITIONS					DATA IN ADDITION TO U, D, M, RPM, & POWER	COMMENTS						
		DUCT SHAPE	DUCT ASPECT RATIO	TOTAL NO. PROP. BLADES	NOMINAL PROP. DIAM. (IN)	PROP. DISK AREA (%)	MAX. m^2 TUNNEL (%)	° RANGE	MAX. TESTED &/OR DESIGN DISK LOADING (LB/FT ²)	MAX. V / V _∞	MAX. ADVANCE RATIO	° RANGE x 10 ⁻³	DUCT FORCE MOMENTS	PROP. FORCE MOMENTS			DUCT PRESS. DISTRIBUTION	VELOCITY SURVEY	STATIC DATA	PROP. REMOVED DATA	EXIT-VANE TESTS	INLET GUIDE VANE TEST
84	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	124 REPORTS LISTED PERTAINING TO DUCTED PROPELLERS. A TABLE OF 28 REPORTS CONTAINING IDENTIFICATION DATA IN HOVER, CRUISE, AND TRANSITION FLIGHT SHOWS THE PARAMETERS VARIED, WITH ADDITIONAL COMMENTS, SIMILAR TO THE ANALYSES IN THIS TABLE.
85	MA	1.90	3	1.02	-	-	1.52	-	-	-	1.52	-	-	-	-	-	-	-	-	-	-	1/31:27-SCALE MODEL OF X-22A. DIFFUSION ANGLE APPROX 9° (HALF-ANGLE). EFFECT OF GROUND AND ANGLE OF ATTACK ON LIFT, PITCHING MOMENT, AND ROLLING MOMENT IN HOVERING.
86	MA	1.9	3	1.40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1/5-SCALE VTOL MODEL WITH 4 DUCTED PROPELLERS IN 17-FT TEST SECTION OF LANGLEY 300-MPH, 7 x 10-FT TUNNEL. DIFFUSION ANGLE NOT GIVEN. HOVER, CRUISE, AND TRANSITION FLIGHT. EFFECTS OF ANGLE OF ATTACK, POWER, VERT-TAIL SIZE AND ASPECT RATIO, ANGLE OF ATTACK, VERT-TAIL POSITION, YAWING AND ROLLING MOMENTS. PROPELLER THRUST COEFFICIENT, VANE AND ROLL CONTROL BY EXIT-VANE.
89	MA	1.9	3	1.40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1/5-SCALE VTOL MODEL WITH 4 DUCTED PROPELLERS IN 17-FT TEST SECTION OF LANGLEY 300-MPH, 7 x 10-FT TUNNEL. DIFFUSION ANGLE NOT GIVEN. HOVER, CRUISE, AND TRANSITION FLIGHT. EFFECT OF GROUND ON LIFT, DRAG, AND PITCHING MOMENT.
90	-	-	8	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	EFFECTS OF HORIZ. TAIL, DUCT FAIRINGS, DUCT LOCATION, DUCT DELECTION, DUCT LIP DIFFERENTIAL DUCT DEFLECTION, PROPELLER PROP. ROTATION DIRECTION, MAGNITUDE, VANE DEFLECTION, AND POWER ON LIFT, DRAG, AND PITCHING MOMENT OF MODEL. ALSO ISOLATED DUCTED PROP. DATA. DUCT STALL. TUFT STUDIES AT VARIOUS THRUST COEFF. DUCT DEFLECTION ANGLES, AND ANGLES OF ATTACK.
92	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	VTOL CONFIG WITH TILTING DUCTED FANS ON EACH WING-TIP DOAK 18° IN FLIGHT TEST. TIME HISTORIES OF AIRCRAFT MOTIONS IN ROLL, PITCH, AND YAW, CONTROL POSITIONS, AND DUCT PITCHING-MOMENT VARIATIONS IN HOVER AND TRANSITION.
93	MA	2.48	3	2.21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	84 REF. LISTED CONTAINING TEST DATA ON DUCTED PROPS. 17 REF. ANALYZED, INCLUDING 15 27, 40 THROUGH 48, 63, 63, 70, AND 78, AND PRESENTED ON PLOTS OF STATIC EFFICIENCY AND SHROUD THRUST IN HOVER; THRUST COEFFICIENT AS A FUNCTION OF ADVANCE RATIO AND BLADE ANGLE, PROPULSIVE EFFICIENCY, AND SHROUD THRUST IN CRUISE; AND LIFT, DRAG, AND POWER COEFF. AND PITCHING AND ROLLING MOMENTS IN TRANSITION.
95	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	SHROUDED PROPELLER IN HOVER. REARWARD MOTION AND FORWARD MOTION. BLADE PITCH VARIED FROM 0° TO 25°. BLADE TWIST ZERO. DIFFUSION APPROX 16° (HALF-ANGLE). RPM MEASURED. SHROUD PRESS. DISTRIBUTION, STAGNATION-LINE LOCATION, AND SHROUD THRUST FOR 3 CASES OF MOTION AT SEVERAL PROP. PITCH ANGLES, PROP. ROTATIONAL SPEEDS, AND VEHICLE LINEAR SPEEDS. TUFT STUDIES OUTSIDE OF DUCT.
96	MA	-	-	-	-	-	250/-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	PROGRAM SUMMARY OF UNIV. OF WICHITA DUCTED PROPELLER RESEARCH. NO DATA BUT SOME MODEL GEOMETRIC CHARACTERISTICS GIVEN.
97	MA	1.64	8	4.0	0.38	2.64	125/100	6.75	0.91	59 → 4.06	-	-	-	-	-	-	-	-	-	-	-	SEMIPAN WING WITH DOAK DUCTED FAN MOUNTED ON WING TIP IN AMES 40 x 80-FT TUNNEL. DIFFUSION ANGLE NOT GIVEN. EFFECT OF ANGLE OF ATTACK ON LIFT, DRAG, AND PITCHING MOMENT. ALSO EFFECTS OF EXIT VANE DEFLECTION, AIRPLANE WEIGHT, AND DISK LOADINGS AND TIP STALL ON PITCHING MOMENT FROM HOVER TO CRUISE. LIFT AND PITCHING MOMENT FOR DUCT AND DUCT PLUS WING.
																						VZ4 SEMIPAN WING PLUS DUCT PROTOTYPE COMPONENTS. NO BLADE PITCH VARIATION. TRANSITION CONDITIONS. WING-ALONE DATA. DOWNWASH INVESTIGATION AT HOVAZ POSITION. EXIT-VANE PITCHING-MOMENT CONTROL INVESTIGATED. 11° DIFFUSION (HALF-ANGLE).

*MA = Modified Airfoil; BM = Bellmouth; NBM = Noched Bellmouth; +D = Plus Diffuser; TWC = Thin Walled Cylinder

1.00 - March 1971 - CO-99 - 24-1-648

9.3.1 DUCTED-PROPELLER LIFT VARIATION WITH POWER AND ANGLE OF ATTACK

The primary purpose of enclosing a propeller in a duct is to increase the thrust-generating capability in the static and low subsonic speed regimes for a given propeller diameter and power input. Because of strong mutual interference effects, the ducted-propeller aerodynamic characteristics are vastly different from those of a free propeller and an annular airfoil. The forces and moments acting on a ducted propeller may be considered as arising from the propeller forces, the duct forces, and the mutual interference of the duct and propeller.

As a consequence of the input of mechanical energy to a propeller delivering positive thrust, there is a pressure rise at the propeller disk, which is subsequently transformed into kinetic energy in the slipstream. If the propeller is enclosed within a fairing, a further velocity increment is produced at the propeller, which must be superimposed on the propeller flow. If this velocity increment is positive, the mass flow and consequently the total thrust are increased. This increase in force acts on the duct, and its magnitude depends upon the velocity increment due to the duct and the propeller loading. In addition, the mutual interference of the duct and propeller and other bodies which may be present results in an induced circulation, which may either increase or decrease the internal mass flow.

The Datcom methods presented for estimating forces and moments on ducted-propeller configurations require knowledge of only the total internal axial thrust rather than the thrust due to the propeller and to the duct at angle of attack. However, the fundamental phenomenon of ducted-propeller aerodynamics may be clarified somewhat by an analysis of the division of loads between the duct and the propeller.

The results of an investigation of the division of the forces and moments between a duct and a propeller of a ducted propeller are reported in reference 6. The investigation covered an angle-of-attack range and an advance-ratio range typical of the transition of a tilt-duct VTOL aircraft.

Figures 9.3.1-10a and 9.3.1-10b, reproduced from reference 6, present a comparison of the normal force, thrust force, and pitching moment on the propeller with the total model forces and moments, for an unstalled and a stalled duct, respectively. The unstalled configuration is the basic symmetrical duct shape modified by the addition of leading-edge fairings. These results show that the normal force and pitching moment acting on the propeller and spinner are relatively small in comparison with the total normal force and pitching moment of either the stalled or unstalled unit and that the duct is the primary source of normal force and pitching moment.

Figure 9.3.1-12, reproduced from reference 6, presents the variation of propeller thrust relative to total thrust with angle of attack for both the unstalled and the stalled duct configurations. In hovering ($V/nd_p = 0$), the propeller carries approximately 40 percent of the total thrust. At the highest value of the advance ratio tested, the propeller carries approximately 70 percent of the total thrust when α is near 0° . For the unstalled operation, the propeller thrust ratio generally decreases with increasing angle of attack at a constant advance ratio. Beyond the stall the propeller thrust ratio increases with increasing angle of attack at a constant advance ratio. The increase can be attributed to the reduction in duct thrust caused by the lip stall.

Unpowered conditions correspond to a duct exit-velocity ratio of approximately 1.0. The exact value depends on the circulation about the duct. Annular wing reports, such as reference 2, may be used to estimate the forces and moments on an unpowered ducted propeller at angle of attack.

For convenience, the methods presented in subsequent Sections provide wind-axis aerodynamic force coefficients: conventional lift and drag coefficients normal and parallel to the free stream. The aerodynamic force and moment coefficients are referred to free-stream dynamic pressure.

Ducted propeller forces and moments are compared with those predicted by the Datcom methods in this and the following Sections. The experimental data represent a wide variation of duct and propeller variables over angle-of-attack and advance-ratio ranges typical of the transition range of a tilting duct VTOL aircraft. Experimental axial-thrust values have been used in the Datcom method calculations. A comparison of some of the pertinent geometric and aerodynamic parameter variations of the test configurations can be made by referring to the reference list of this Section and the reference list and table 9.3-A of Section 9.3. The Datcom methods are based on modifications to simple momentum theory and do not account for the possible wide variation in design parameters.

The lift predicted by the Datcom method of this Section compares favorably with test results throughout the range of the investigation. On the other hand, the pitching moment and drag predicted by the Datcom methods of Sections 9.3.2 and 9.3.3, respectively, vary noticeably from experimental results.

The method presented in this Section for the estimation of the lift of a ducted propeller is expressed as the sum of the lift components resulting from the internal and external mass flows. The internal-mass-flow component is estimated on the basis of simple momentum theory with empirical flow-turning corrections as a function of the duct aspect ratio and the duct exit-velocity ratio. The external-mass-flow component is estimated on the basis of empirical modifications of the data of references 1 and 2.

DATCOM METHOD

The method presented for the estimation of ducted-propeller lift coefficient is expressed as the sum of the components resulting from the internal and external mass flows. This approach is summarized by

$$C_L = \frac{L}{q_\infty S_D} = C_{L_i} + C_{L_e}$$

$$= \frac{\pi A_D}{2} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] \left(\frac{v_e}{v_\infty} \right)^2 \sin \delta_{i_f} + C_{L_e} \quad 9.3.1-a$$

where

C_{L_i} is the lift coefficient resulting from the internal mass flow

C_{L_e} is the lift coefficient resulting from the external mass flow. It is obtained from figure 9.3.1-13 as a function of duct aspect ratio and angle of attack. Figure 9.3.1-13 is based on empirical modifications of the data of references 1 and 2.

δ_{i_f} is the net turning angle of the internal flow including power effects.

The basic approach to the solution of equation 9.3.1-a is as follows:

1. Determine the turning angle of the internal flow neglecting the effects of power.
2. Determine the exit-velocity ratio V_e/V_{∞} .
3. Determine the net turning angle of the internal flow including power effects.
4. Evaluate the internal-flow lift contribution using the terms obtained in steps 2 and 3 above.

The results of reference 2 indicate that the lift-curve slope of annular wings is twice that of plane unswept wings of the same aspect ratio. Based on simple momentum theory, the usual small-angle approximation, and the assumption of no lip separation, the turning angle of the internal flow, neglecting power effects, is

$$\delta_{i_o} \approx \sin^{-1} \left(\frac{C_{L_e} \alpha}{\pi A_D} \right) \quad 9.3.1-b$$

The unpowered, internal-flow turning angle relative to duct angle of attack is presented in figure 9.3.1-14 as a function of duct aspect ratio. Figure 9.3.1-14 is based on the uninstalled test data of reference 2 and equation 9.3.1-b.

Addition of power causes further turning of the internal flow. This turning occurs forward of the propeller plane because of the closed boundaries of the duct. The flow is assumed to pass through the duct normal to the propeller plane, and the total velocity increase imparted to the internal flow (V_1) is assumed to be the difference between the duct exit velocity and the free-stream velocity. This results in the following expression for the net turning angle of the internal flow, including power effects (see figure 9.3-11b).

$$\delta_{i_f} \approx \sin^{-1} \left[\frac{V_{\infty} \sin \delta_{i_o} + (V_e - V_{\infty}) \sin \alpha_D}{V_e} \right] \quad 9.3.1-c$$

The total lift contribution of a ducted propeller is obtained from the procedure outlined in the following steps:

- Step 1. Determine the turning angle of the internal flow, neglecting power effects, by

$$\delta_{i_o} = \alpha_D \left(\frac{\Delta \delta_{i_o}}{\Delta \alpha_D} \right) \quad 9.3.1-d$$

where $\frac{\Delta \delta_{10}}{\Delta \alpha_D}$ is obtained from figure 9.3.1-14 as a function of duct aspect ratio.

Step 2. Determine the exit-velocity ratio $\frac{v_e}{v_\infty}$ using

$$\frac{v_e}{v_\infty} = \frac{1 + \sqrt{1 + \frac{2T_1}{q_\infty S_e}}}{2} \quad 9.3.1-e$$

where

S_e is the flow area at the duct exit plane = $\frac{\pi d_e^2}{4} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right]$

T_1 is the total internal axial thrust ($\alpha_D = 0$), obtained as the sum of the net axial thrust T_{net} and the external duct drag.

$$T_1 = T_{net} + C_{D_e} q_\infty S_D \quad 9.3.1-f$$

Estimation of the net axial thrust is a ducted-propeller performance problem and is consequently outside the scope of the Datcom. A propulsion engineer should be consulted for this parameter.

The external duct drag C_{D_e} is obtained from figure 9.3.3-4 at $\alpha_D = 0^\circ$, where $C_{D_e} = -C_{F_{x_e}}$

Step 3. Using equation 9.3.1-c, obtain δ_{1f} with the δ_{10} and $\frac{v_e}{v_\infty}$ values from Steps 1 and 2 above.

Step 4. Determine the internal-mass-flow lift-coefficient contribution by

$$C_{L_1} = \frac{\pi A_D}{2} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] \left(\frac{v_e}{v_\infty} \right)^2 \sin \delta_{1f} \quad 9.3.1-g$$

Step 5. Obtain the lift coefficient C_{L_e} from figure 9.3.1-13 as a function of the duct aspect ratio and angle of attack.

Step 6. The total lift coefficient is given by equation 9.3.1-a

$$C_L = C_{L_1} + C_{L_e}$$

A comparison of test data with ducted-propeller lift coefficients computed by this method is shown in Table 9.3.1-A.

Sample Problem

Given: The ducted propeller configuration of reference 1

$$d_e = 4.525 \text{ ft} \quad d_{CB} = 1.208 \text{ ft} \quad c = 2.75 \text{ ft} \quad S_D = 12.45 \text{ sq ft}$$

Additional Characteristics

$$V_\infty = 93.5 \text{ ft/sec} \quad \alpha_D = 30^\circ \quad T_{\text{net}} = 635 \text{ lb} \quad \text{Sea level } q_\infty = 10.4 \text{ lb/sq ft}$$

Compute:

Step 1. Determine the turning angle of the internal mass flow without power effects.

$$A_D = \frac{d_e}{c} = \frac{4.525}{2.75} = 1.645$$

$$\frac{\Delta \delta_{i_0}}{\Delta \alpha_D} = 0.830 \quad (\text{figure 9.3.1-14})$$

$$\begin{aligned} \delta_{i_0} &= \alpha_D \left(\frac{\Delta \delta_{i_0}}{\Delta \alpha_D} \right) \quad (\text{equation 9.3.1-d}) \\ &= (30)(0.830) \\ &= 24.9 \text{ deg} \end{aligned}$$

Step 2. Determine the exit-velocity ratio

$$C_{D_e} = -C_{F_{x_e}} = 0.022 \quad (\text{figure 9.3.3-4, at } \alpha_D = 0)$$

$$\begin{aligned} T_i &= T_{\text{net}} + C_{D_e} q_\infty S_D \quad (\text{equation 9.3.1-f}) \\ &= 635 + (0.022)(10.4)(12.45) \\ &= 637.7 \text{ lb} \end{aligned}$$

$$\begin{aligned} S_e &= \frac{\pi d_e^2}{4} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] = \frac{\pi (4.525)^2}{4} \left[1 - \left(\frac{1.208}{4.525} \right)^2 \right] \\ &= 16.10 \quad (0.9295) \\ &= 14.97 \text{ sq ft} \end{aligned}$$

$$\frac{v_e}{v_\infty} = \frac{1 + \sqrt{1 + \frac{2T_i}{q_\infty S_e}}}{2} \quad (\text{equation 9.3.1-e})$$

$$= \frac{1 + \sqrt{1 + (2) \frac{637.7}{(10.4)(14.97)}}}{2}$$

$$= \frac{1 + \sqrt{1 + 8.19}}{2}$$

$$\frac{V_e}{V_\infty} = 2.02$$

Step 3. Determine the net turning angle of the internal mass flow, including power effects.

$$\begin{aligned} \delta_{1f} &\approx \sin^{-1} \left[\frac{V_\infty \sin \delta_{1o} + (V_e - V_\infty) \sin \alpha_D}{V_e} \right] \text{ (equation 9.3.1-c)} \\ &= \sin^{-1} \left[\frac{(93.5)(0.421) + (189 - 93.5)(0.50)}{189} \right] \\ &= \sin^{-1} (0.4609) \\ &= 27.45 \text{ deg} \end{aligned}$$

Step 4. Determine the lift-coefficient contribution of the internal mass flow.

$$\begin{aligned} C_{L1} &= \frac{\pi A_D}{2} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] \left(\frac{V_e}{V_\infty} \right)^2 \sin \delta_{1f} \text{ (equation 9.3.1-g)} \\ &= \frac{\pi(1.645)}{2} (0.9295)(2.02)^2 (0.4604) \\ &= 4.53 \end{aligned}$$

Step 5. Determine the lift-coefficient contribution of the external mass flow.

$$C_{Le} = 0.69 \text{ (figure 9.3.1-13)}$$

Solution:

$$\begin{aligned} C_L &= C_{L1} + C_{Le} \text{ (equation 9.3.1-a)} \\ &= 4.53 + 0.69 \\ &= 5.22 \end{aligned}$$

This corresponds to an experimental value of 5.40 obtained from reference 1.

REFERENCES

1. Mort, K. W., and Yaggy, P. F.: Aerodynamic Characteristics of a Four-Foot Diameter Ducted Fan Mounted on the Tip of a Semi-Span Wing. NASA TN D-1301, 1962. (U)
2. Fletcher, H. S.: Experimental Investigation of Lift, Drag, and Pitching Moment of Five Annular Airfoils. NACA TN 4117, 1957. (U)
3. Hoehne, V. O.: Shrouded Propeller Investigations: Wind-Tunnel Test of a Shrouded Propeller with a 10-Bladed Propeller, Exit Stators, and Long-Chord Shroud with High Speed Inlet and No Exit Diffusion. University of Wichita, Dept. of Eng. Research Rpt. No. 213-5, 1959. (U)
4. Hoehne, V. O.: Shrouded Propeller Investigations: Wind Tunnel Test of a Shrouded Propeller with a 10-Bladed Propeller, Exit Stators, and Long-Chord Shroud with Static Inlet and No Diffusion. University of Wichita, Dept. of Eng. Research Rpt. No. 213-6, 1959. (U)
5. Hoehne, V. O.: Shrouded Propeller Investigations: Wind Tunnel Tests of a 2-Bladed Shrouded Propeller Model. University of Wichita, Dept. of Eng. Research Rpt. No. 213-11, 1960. (U)
6. Grunwald, K. J., and Goodson, K. W.: Aerodynamic Loads on an Isolated Shrouded-Propeller Configuration for Angles of Attack From -10° to 110° . NASA TN D-995, 1962. (U)

TABLE 9.3.1-A
DATA SUMMARY AND SUBSTANTIATION
DUCTED PROPELLER LIFT COEFFICIENT

Reference	α_D deg	J	V_∞ fps	T_1 lb	$\frac{V_e}{V_\infty}$	δ_{10} deg	δ_{1r} deg	C_L Calc	C_L Test	$\frac{\delta}{\%}$ Error
1* c = 2.75 ft d _e = 4.525 ft A _D = 1.645 d _{CB} = 1.208 ft	15	0.62	165.5	251.6	1.21	12.4	12.85	1.31	1.3	.8
		0.48	128.0	456.3	1.52		13.28	1.79	1.8	-.6
	30	0.62	165.5	251.6	1.21	24.9	25.78	2.23	2.6	-14.2
		0.48	128.0	456.3	1.52		26.61	3.16	3.6	-12.2
		0.35	93.5	637.7	2.02		27.45	5.22	5.4	-3.3
		0.28	74.8	743.9	2.49		27.93	7.69	8.3	-7.3
	45	0.48	128.0	456.3	1.52	37.3	39.82	4.17	5.3	-21.3
		0.35	93.5	637.7	2.02		41.10	7.07	8.0	-11.6
		0.28	74.8	743.9	2.49		41.80	10.59	12.4	-14.6
		0.22	58.8	820.0	3.13		42.44	16.52	18.0	-8.2
	60	0.42	112.0	535.1	1.70	49.7	53.65	6.06	8.0	-24.2
		0.28	74.8	743.9	2.49		55.54	12.77	14.8	-13.7
		0.22	58.8	820.0	3.13		56.41	20.06	23.4	-14.3
		0.17	45.4	894.0	4.03	62.2	57.18	33.26	32.0	3.9
	75	0.35	93.5	637.7	2.02		67.77	9.28	11.2	-17.1
	0.22	58.8	743.9	3.13		70.03	22.34	25.4	-12.0	
90	0.22	58.8	743.9	3.13	74.6	81.30	23.28	27.5	-15.3	
3 c = 0.794 ft d _e = 1.16 ft A _D = 1.46 d _{CB} = 0.348 ft	30	0.35	75.0	88.2	3.18	25.6	28.60	10.77	11.56	-6.8
		0.35	100.0	256.0	3.85		28.84	15.60	16.24	-3.9
		0.70		53.2	2.11		27.90	5.01	5.26	-4.8
4 c = 0.895 ft d _e = 1.16 ft A _D = 1.296 d _{CB} = 0.348 ft	30	0.35	100.0	262.5	3.93	26.25	29.03	14.49	15.49	-6.5
		0.50		115.4	2.80		28.65	7.59	8.20	-7.4
		0.70		45.0	1.99		28.10	4.09	4.78	-14.4
	45	0.25	75.0	323.9	5.55	39.38	43.95	40.11	40.27	-.4
		0.35		147.6	3.93		43.52	20.26	21.59	-6.2
		0.50		64.9	2.80		42.93	10.47	11.55	-9.4
	60	0.20	50.0	146.4	5.59	52.5	58.54	49.68	50.46	-1.5
		0.30		57.7	3.72		57.8	22.12	23.04	-4.0
		0.40		28.8	2.80		57.15	12.39	13.18	-6.0
	75	0.20	40.0	93.7	5.59	65.63	72.96	55.40	49.00	13.1
		0.30		36.8	3.72		71.73	24.39	25.39	-3.9
		0.40		18.5	2.80		71.14	13.90	14.55	-4.5
	90	0.20	30.0	52.7	5.59	78.75	85.30	57.35	55.99	2.4
		0.30		20.7	3.72		84.00	25.4	26.18	-3.0
		0.40		10.4	2.80		83.25	14.39	14.77	-2.6
5 c = 0.58 ft d _e = 1.246 ft A _D = 2.15 d _{CB} = 0.348 ft	20	0.39	100.0	75.53	2.26	15.10	17.81	5.53	5.73	-3.5
		0.292		141.20	2.86		18.27	8.62	9.31	-7.4
		0.25		194.86	3.25		18.48	11.08	12.48	-11.2
	30	0.39		75.53	2.26	22.65	26.69	7.85	7.59	3.4
		0.292		141.20	2.86		27.38	12.39	12.99	-4.6
	0.25		194.86	3.25		27.69	15.99	17.60	-9.1	

*Test results include wing-duct interference effects.

TABLE 9.3.1-A (CONTD)

Reference	α_D deg	J	V_∞ fps	T_1 lb	$\frac{V_e}{V_\infty}$	δ_{10} deg	δ_{1f} deg	C_L Calc	C_L Test	e % Error	
5 (con't) c = 0.58 ft d _e = 1.160 ft A _D = 2.0 d _{CB} = 0.348 ft	20	0.39	100.0	73.89	2.37	15.56	18.11	5.64	5.21	8.3	
		0.292		132.35	2.96	18.49	8.59	8.61	-0.2		
	30	0.25		177.20	3.33	18.65	10.79	10.80	-0.1		
		0.39		73.89	2.37	23.34	27.14	8.02	7.22	11.1	
		0.292		132.35	2.96	27.71	12.34	12.29	0.4		
		0.25		177.20	3.33	27.96	15.56	15.92	-2.3		
		40		0.39	73.89	2.37	31.12	36.13	10.12	8.66	16.9
				0.292	132.35	2.96	36.89	15.69	14.52	8.1	
				0.25	177.20	3.33	37.23	19.84	18.60	6.7	
6 c = 0.859 ft d _e = 1.41 ft A _D = 1.64 d _{CB} = 0.358 ft	10	0.595	100.0	18.8	1.39	8.30	8.80	1.08	1.06	1.7	
	15					12.50	13.18	1.59	1.59	0	
	20					16.60	17.56	2.03	1.95	4.1	
	30					24.90	26.30	2.75	2.75	0	
	40					33.20	35.00	3.32	3.39	-2.1	
	45					37.40	39.37	3.58	3.59	-0.3	

$$\text{Average error} = \frac{\sum |e|}{n} = 7.1\%$$

(a) UNSTALLED CONFIGURATION

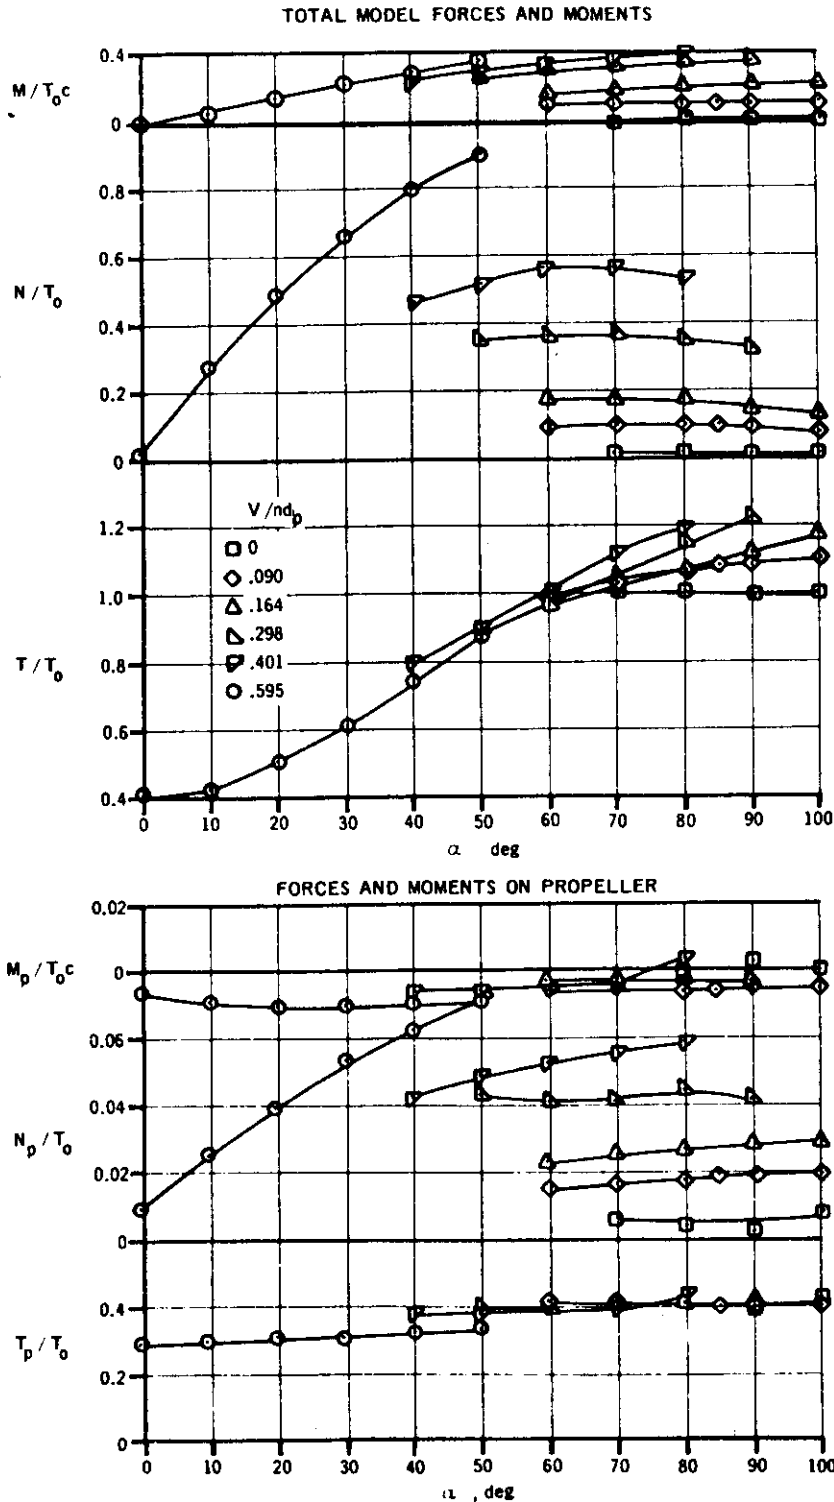


FIGURE 9.3.1-10 COMPARISON OF FORCES AND MOMENTS ON THE PROPELLER WITH TOTAL FORCES AND MOMENTS FOR THE DUCTED PROPELLER CONFIGURATION OF REFERENCE 6

(b) STALLED CONFIGURATION

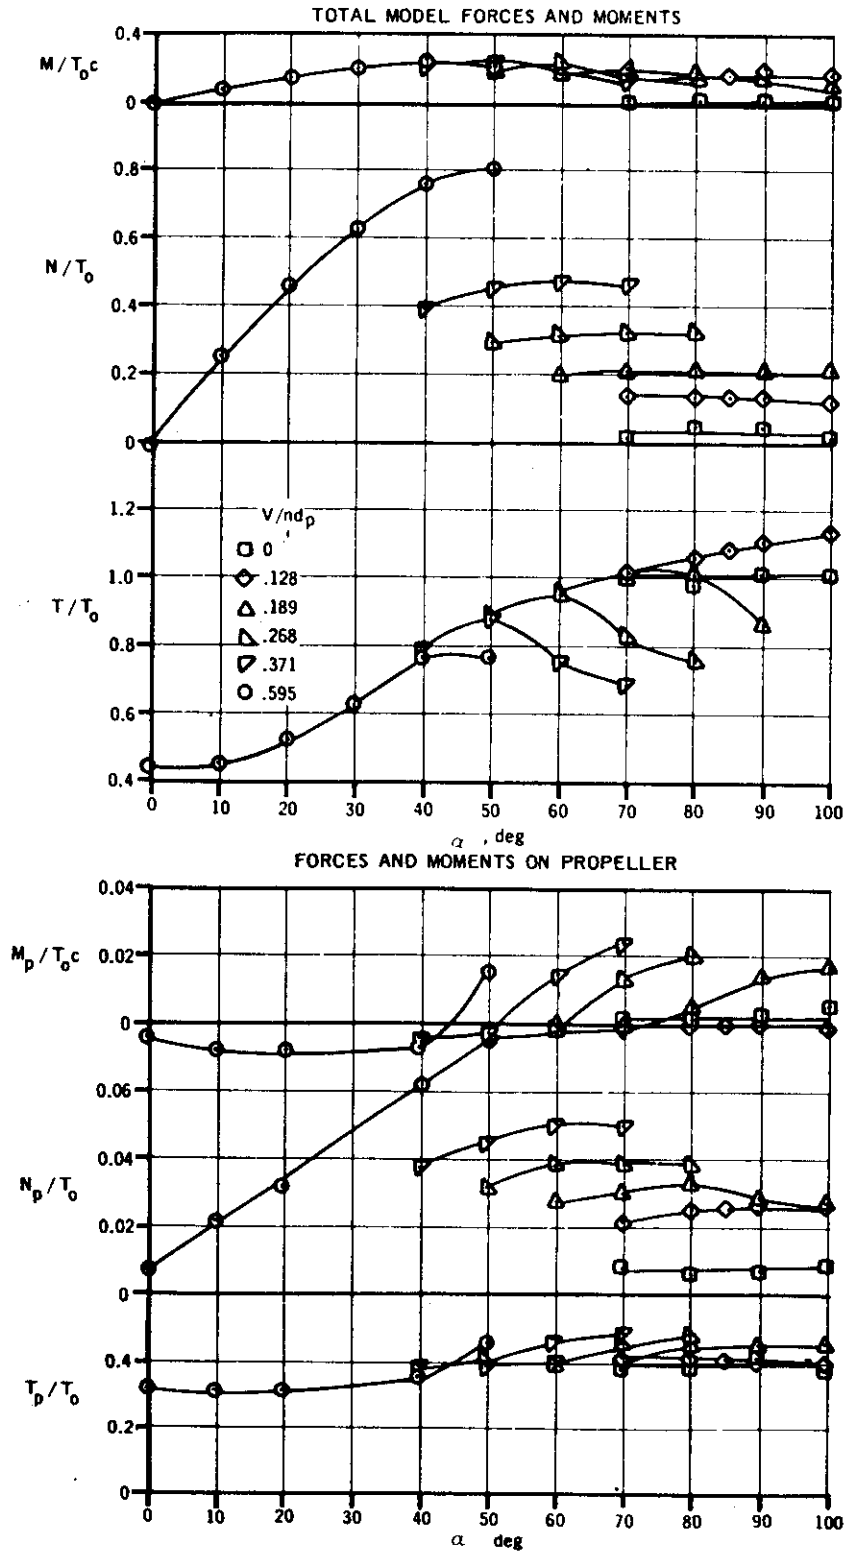


FIGURE 9.3.1-10 (CONTD)

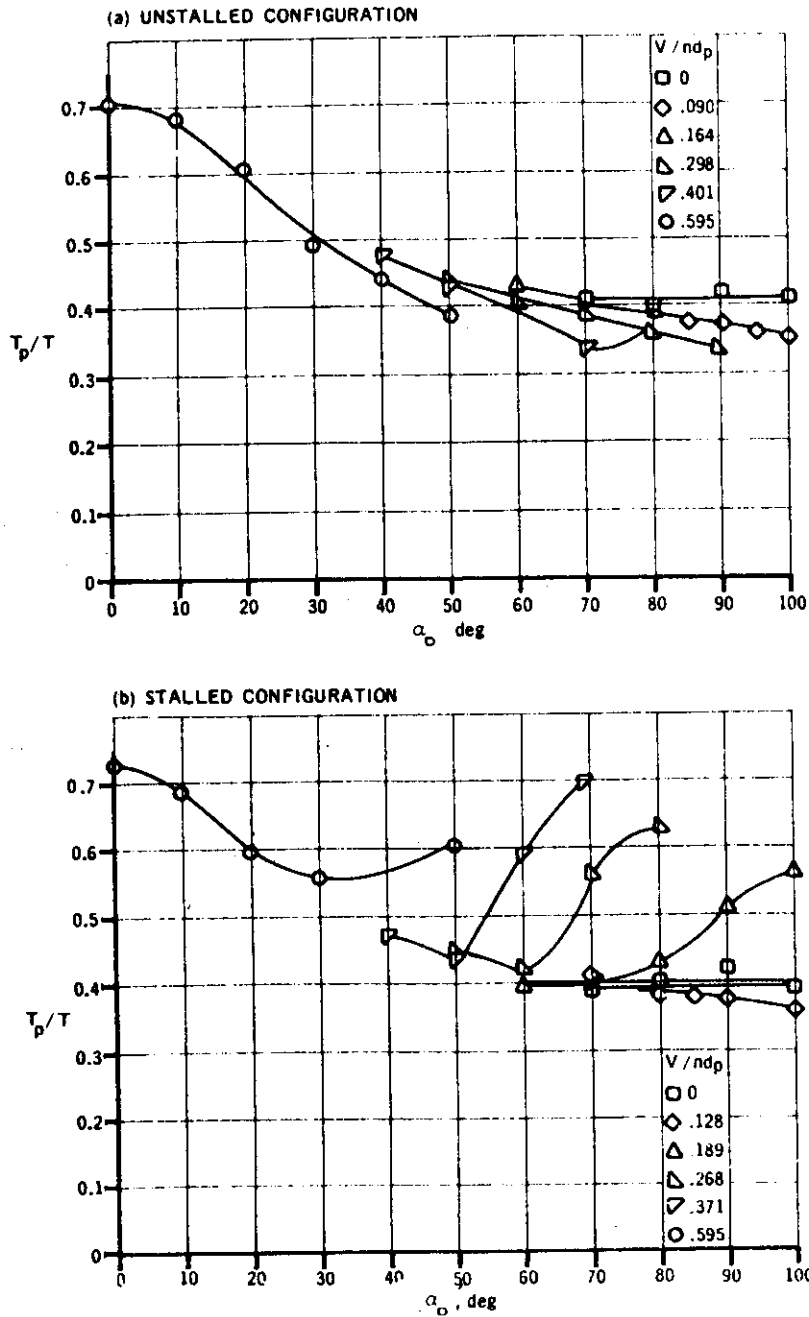


FIGURE 9.3.1-12 VARIATION OF THE RATIO OF PROPELLER THRUST TO TOTAL THRUST WITH ANGLE OF ATTACK FOR THE DUCTED PROPELLER CONFIGURATION OF REFERENCE 6

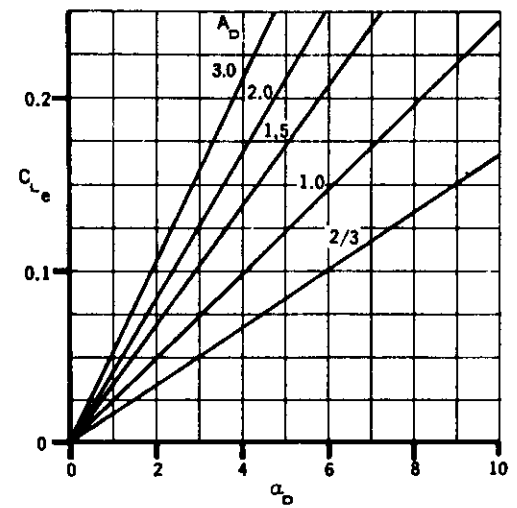
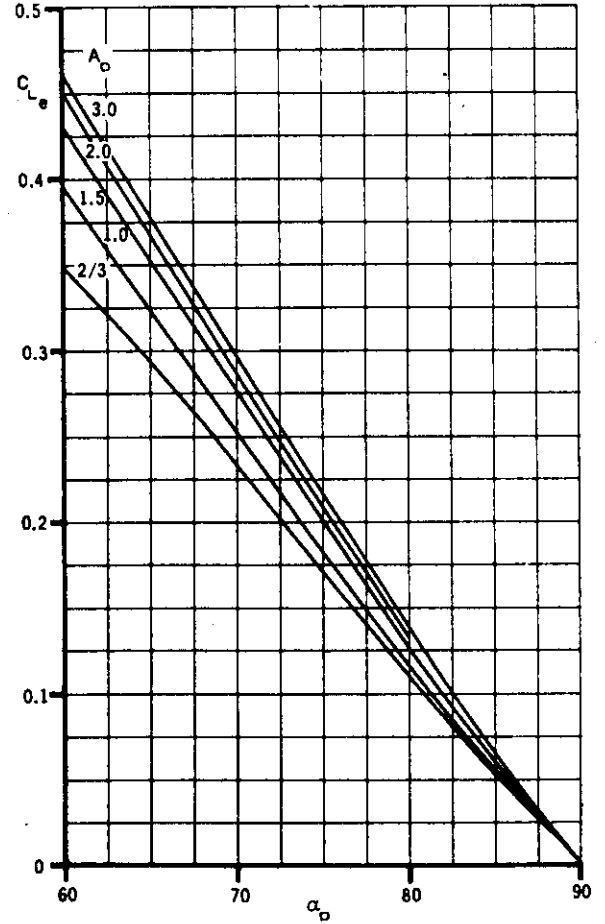
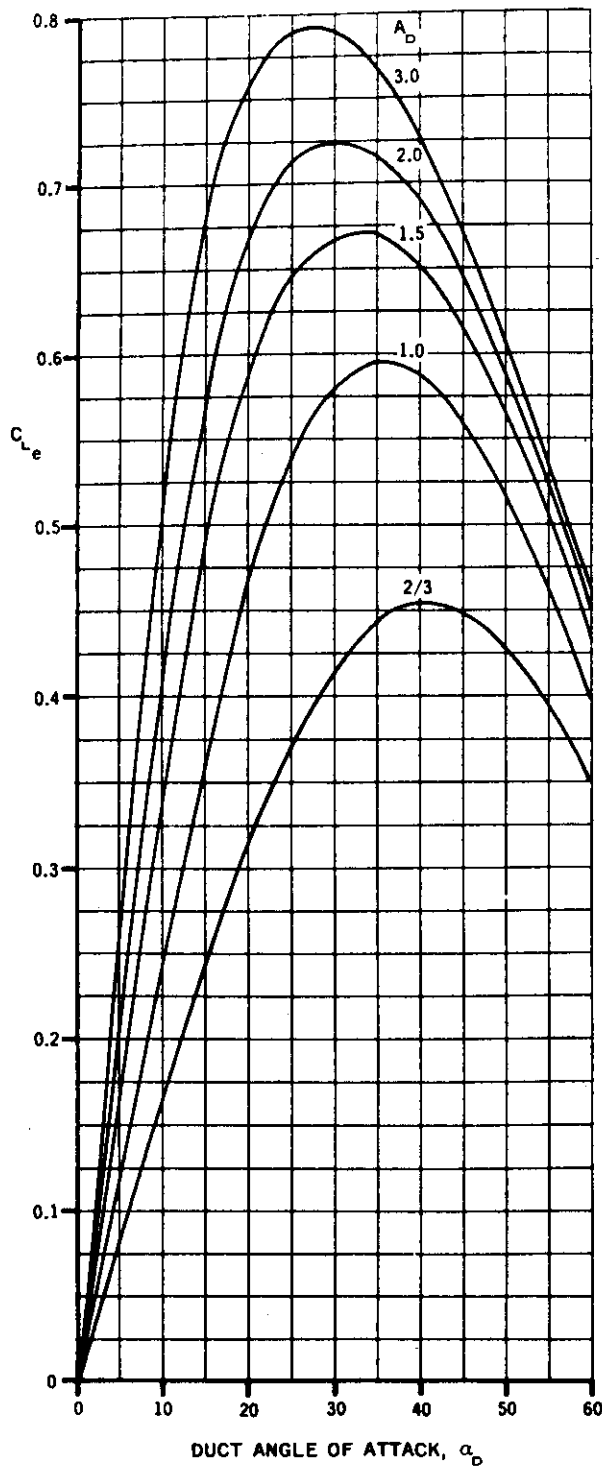


FIGURE 9.3.1-13 EXTERNAL MASS FLOW LIFT COEFFICIENT

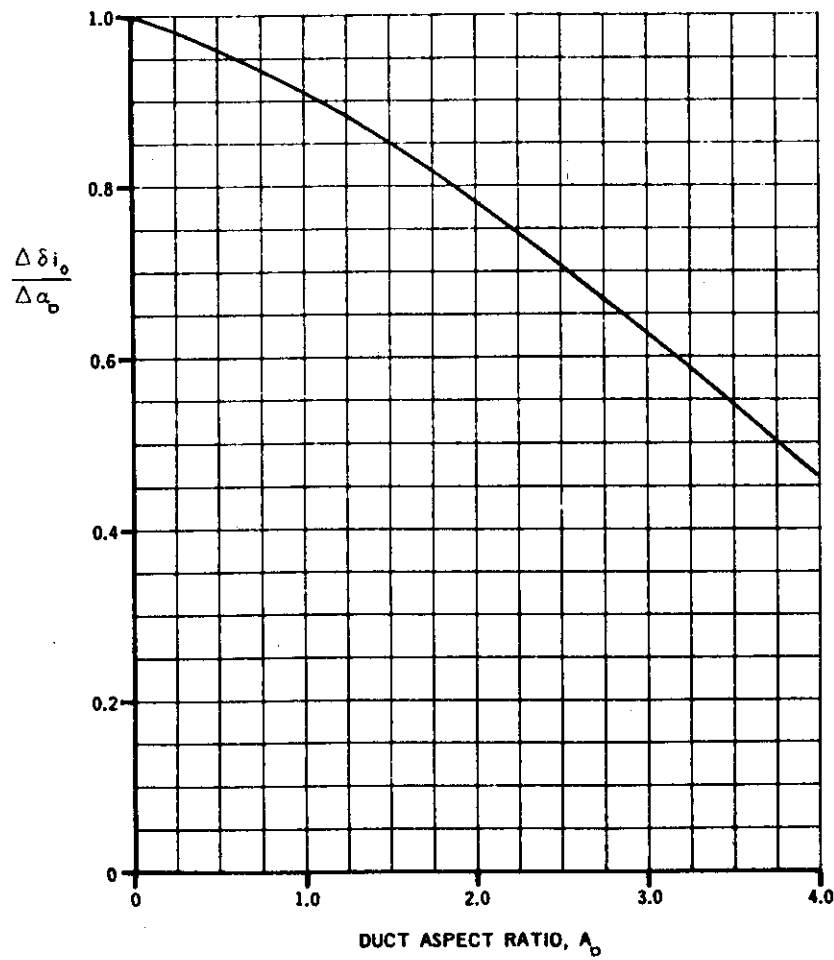


FIGURE 9.3.1-14 RATIO OF UNPOWERED DUCT INTERNAL MASS FLOW TURNING ANGLE TO DUCT ANGLE OF ATTACK

9.3.2 DUCTED-PROPELLER PITCHING-MOMENT VARIATION WITH POWER AND ANGLE OF ATTACK

This Section presents a method for estimating ducted-propeller pitching moments as functions of power and angle of attack. The basic discussion in Section 9.3.1 is directly applicable to this Section, and the reader is referred to that discussion for a general description of the fundamental phenomenon.

DATCOM METHOD

The method presented for estimating ducted-propeller pitching moments is based on ring vortex and simple momentum theories with empirical modifications.

The pitching moment consists of three component parts:

- (1) A circulation-induced moment which in effect causes a shift in axial duct forces (essentially a shift in thrust axis.)
- (2) A moment due to the lift component
- (3) A moment due to the negative drag component

The circulation-induced moment is always positive (nose-up) and increases with increasing power. The last two components also increase in magnitude with power but may be positive or negative depending upon the location of the ducted-propeller center of pressure. This method assumes the center-of-pressure location to be independent of power and angle of attack and to be on the duct axis at the unstalled center-of-pressure location of the undiffused annular wings of reference 2.

The pitching-moment contribution of a ducted-propeller configuration, based on the duct planform area and duct chord and referred to an arbitrary moment center, is given by

$$C_m = \frac{\pi A_D}{2} \left(\frac{v_e}{v_\infty} - \cos \delta_{1f} \right) \sin \alpha_D + \frac{\bar{x}}{c} (C_L \cos \alpha_D - C_{F_x} \sin \alpha_D) \quad 9.3.2-a$$

where the first term on the right-hand side is the circulation-induced moment as derived by Sacks in reference 1, modified by the empirical relation for the net turning angle of the internal flow, discussed in Section 9.3.1. The last two terms are the components due to lift and drag.

$\frac{v_e}{v_\infty}$ is the exit-velocity ratio, obtained from equation 9.3.1-e

δ_{1f} is the internal-flow turning angle, including the effects of power, obtained from equation 9.3.1-c

C_L is the total lift coefficient of the ducted propeller, obtained from Section 9.3.1

C_{F_x} is the total negative drag coefficient of the ducted propeller, obtained from Section 9.3.3

$\bar{x} = \left(\frac{x_m}{c} - \frac{x_{cp}}{c} \right)$, the chordwise distance, in duct chords, from the reference center to the unstalled duct center of pressure, positive for the center of pressure ahead of the reference center

$\frac{x_m}{c}$ is the chordwise distance, in duct chords, from the duct leading edge to the reference center, positive aft of the duct leading edge

$\frac{x_{cp}}{c}$ is the chordwise distance, in duct chords, from the duct leading edge to the center of pressure of the unstalled duct, positive aft of the duct leading edge. It is obtained as a function of duct aspect ratio from figure 9.3.2-6.

A comparison of test data with ducted propeller pitching-moment coefficients computed by this method is shown in table 9.3.2-A.

Because of the number of variables involved in the ducted propeller problem and the design parameters not considered in the Datcom method, the comparison between theory and experiment cannot be analyzed by examining the isolated effect of one variable. However, it is felt that one important factor pertaining to the test conditions of the available data, namely scale effect, should be considered before assessing the accuracy of this method. The data presented in reference 1 of table 9.3.2-A are the only available test results of a large-scale ducted propeller in the non-axial flow regime. Although experimental data on similar models of different scale are needed for the proper evaluation of the scale effect, it is felt that the low Reynolds numbers of small scale tests will appreciably affect the stalling characteristics of the duct. Therefore, comparison of calculated and large-scale experimental results of reference 1 in table 9.3.2-A is more indicative of the accuracy of the method than comparison with the other reference data.

Sample Problem

Given: Same ducted propeller configuration as sample problem of Section 9.3.1. Some of the characteristics are repeated below.

$$d_e = 4.525 \text{ ft} \quad d_{CB} = 1.208 \text{ ft} \quad c = 2.75 \text{ ft}$$

$$A_D = 1.645 \quad S_D = 12.45 \text{ sq ft}$$

Additional Characteristics

$$V_\infty = 93.5 \text{ ft/sec} \quad \alpha_D = 30^\circ \quad \text{Sea level}$$

$$\text{Moment reference center at } 0.49c \quad q_\infty = 10.4 \text{ lb/sq ft}$$

Compute:

$$\frac{V_e}{V_\infty} = 2.02$$

$$\delta_{1f} = 27.45^\circ$$

$$C_L = C_{L1} + C_{Le} = 5.22$$

(sample problem Section 9.3.1)

$$C_{F_x} = 3.455 \quad (\text{sample problem Section 9.3.3})$$

$$\frac{x_{cp}}{c} = 0.266 \quad (\text{figure 9.3.2-6})$$

$$\begin{aligned} \bar{x} &= \frac{x_m}{c} - \frac{x_{cp}}{c} \\ &= (0.49 - 0.266) \\ &= 0.224 \end{aligned}$$

Solution:

$$\begin{aligned} C_m &= \frac{\pi A_D}{2} \left(\frac{V_e}{V_\infty} \cos \delta_{1f} \right) \sin \alpha_D + \frac{\bar{x}}{c} (C_L \cos \alpha_D - C_{F_x} \sin \alpha_D) \quad (\text{equation 9.3.2-a}) \\ &= \frac{\pi(1.645)}{2} (2.02 - 0.8874)(0.50) + 0.224 \left[(5.22)(0.866) - (3.455)(0.50) \right] \\ &= (2.58)(1.1326)(0.50) + 0.224 (2.792) \\ &= 2.085 \end{aligned}$$

This corresponds to an experimental value of 1.899 obtained from reference 1.

REFERENCES

1. Sacks, A. H.: The Flying Platform as a Research Vehicle for Ducted Propellers. Institute of Aeronautical Sciences Preprint No. 832, 1958. (U)
2. Fletcher, H. S.: Experimental Investigation of Lift, Drag, and Pitching Moment of Five Annular Airfoils. NACA TN 4117, 1957. (U)

TABLE 9.3.2-A^a
DATA SUMMARY AND SUBSTANTIATION
DUCTED PROPELLER PITCHING-MOMENT COEFFICIENT

Ref ^b	α_D deg	J	$\frac{V_e}{V_{\infty}}$	C_L Table 9.3.1-A	C_{F_x} Table 9.3.3-A	$\frac{\bar{x}}{c}$	C_m Calc	C_m Test	e % Error
1 ^c	15	0.62	1.21	1.31	0.38	0.224	0.42	0.50	-16.0
		0.48	1.52	1.79	1.61		0.67	0.70	-4.3
	30	0.62	1.21	2.23	-0.135		0.84	1.00	-16.0
		0.48	1.52	3.16	0.915		1.32	1.10	20.0
		0.35	2.02	5.22	3.46		2.035	1.90	9.5
	45	0.28	2.49	7.69	6.79		2.81	2.60	8.1
		0.48	1.52	4.17	-0.010		2.02	2.10	-3.8
		0.35	2.02	7.07	1.91		3.12	2.85	9.5
		0.28	2.49	10.59	4.49		4.15	4.35	-4.6
	60	0.22	3.13	16.52	9.22		5.52	5.20	6.2
		0.42	1.70	6.06	-0.724		3.29	3.30	-0.3
		0.28	2.49	12.77	1.69		5.41	5.10	6.1
		0.22	3.13	20.06	4.75		7.08	6.50	8.9
	75	0.17	4.03	33.26	10.72		9.44	7.80	21.0
		0.35	2.02	9.28	-1.90		5.03	4.45 ^s	13.0
		0.22	3.13	22.34	-0.237		8.29	7.90	4.9
	90	0.22	3.13	23.28	-4.60		8.72	8.50 ^s	2.5
3	30	0.35	3.18	10.77	12.70	0.283	3.40	2.94	15.6
		0.35	3.85	15.60	20.60		4.29	3.24	32.4
		0.70	2.11	5.01	3.80		2.02	1.71	18.1
4	30	0.35	3.93	14.49	17.33	0.353	4.48	3.86	16.1
		0.50	2.80	7.59	7.18		3.01	2.52	19.4
		0.70	1.99	4.09	2.42		1.95	1.68	16.1
	45	0.25	5.55	40.11	30.2		9.43	7.93 ^s	18.9
		0.35	3.93	20.26	12.86		6.45	5.71	13.0
		0.50	2.80	10.47	4.84		4.38	3.76	16.5
	60	0.20	5.59	49.68	19.14		11.83	9.74 ^s	21.5
		0.30	3.72	22.12	6.04		7.69	6.55 ^s	17.4
		0.40	2.80	12.39	1.98		5.55	4.94 ^s	12.3
	75	0.20	5.59	55.40	5.89		13.45	10.08 ^s	33.4
		0.30	3.72	24.39	0.435		8.79	7.15 ^s	22.9
		0.40	2.80	13.90	-1.205		6.53	5.54 ^s	17.9
90	0.20	5.59	57.35	-6.22	13.38	13.26	0.9		
	0.30	3.72	25.40	-4.82	9.08	8.40	8.1		
	0.40	2.80	14.39	-4.08	6.89	6.31	9.2		

a Refer to Table 9.3.1-A for additional characteristics
b These references are found in Section 9.3.1
c Test results include wing-duct interference effects
s Stalled

TABLE 9.3.2-A² (CONTD)

Ref ^b	α_D deg	J	$\frac{V_e}{V_{\infty}}$	C_L Table 9.3.1-A	C_{Fx} Table 9.3.3-A	$\frac{\bar{x}}{c}$	C_m Calc	C_m Test	e % Error
5	20	0.39	2.26	5.53	7.79	0.208	2.01	1.59	26.4
		0.292	2.86	8.62	15.17		2.79	1.91	46.1
		0.25	3.25	11.08	20.76		3.32	1.99	66.8
	30	0.39	2.26	7.85	6.69		2.99	2.20	35.9
		0.292	2.86	12.39	13.19		4.15	2.90	43.1
		0.25	3.25	15.99	18.53		4.91	3.31	48.3
	20	0.39	2.37	5.64	8.20		2.05	1.33	54.1
		0.292	2.96	8.59	15.01		2.78	1.82	52.7
		0.25	3.33	10.79	20.23		3.24	2.19	47.9
	30	0.39	2.37	8.02	7.05		3.04	1.81	68.0
		0.292	2.96	12.34	13.25		4.11	2.54	61.8
		0.25	3.33	15.56	18.02		4.78	2.79	71.3
	40	0.39	2.37	10.12	5.58		4.02	2.34	71.8
		0.292	2.96	15.69	10.96		5.40	3.31	61.3
		0.25	3.33	19.84	15.11		6.27	5.72	65.5
6	10	0.595	1.39	1.08	1.19	0.174	0.403	0.219	84.0
	15			1.59	1.05		0.593	0.359	65.2
	20			2.03	0.87		0.77	0.47	63.8
	30			2.75	0.43		1.09	0.72	51.4
	40			3.32	-0.90		1.41	0.94	50.0
	45			3.58	-0.37		1.52	1.064	42.9

$$\text{Average error} = \frac{\sum |e|}{n} = 29.5\%$$

- a Refer to Table 9.3.1-A for additional characteristics
 b These references are found in Section 9.3.1

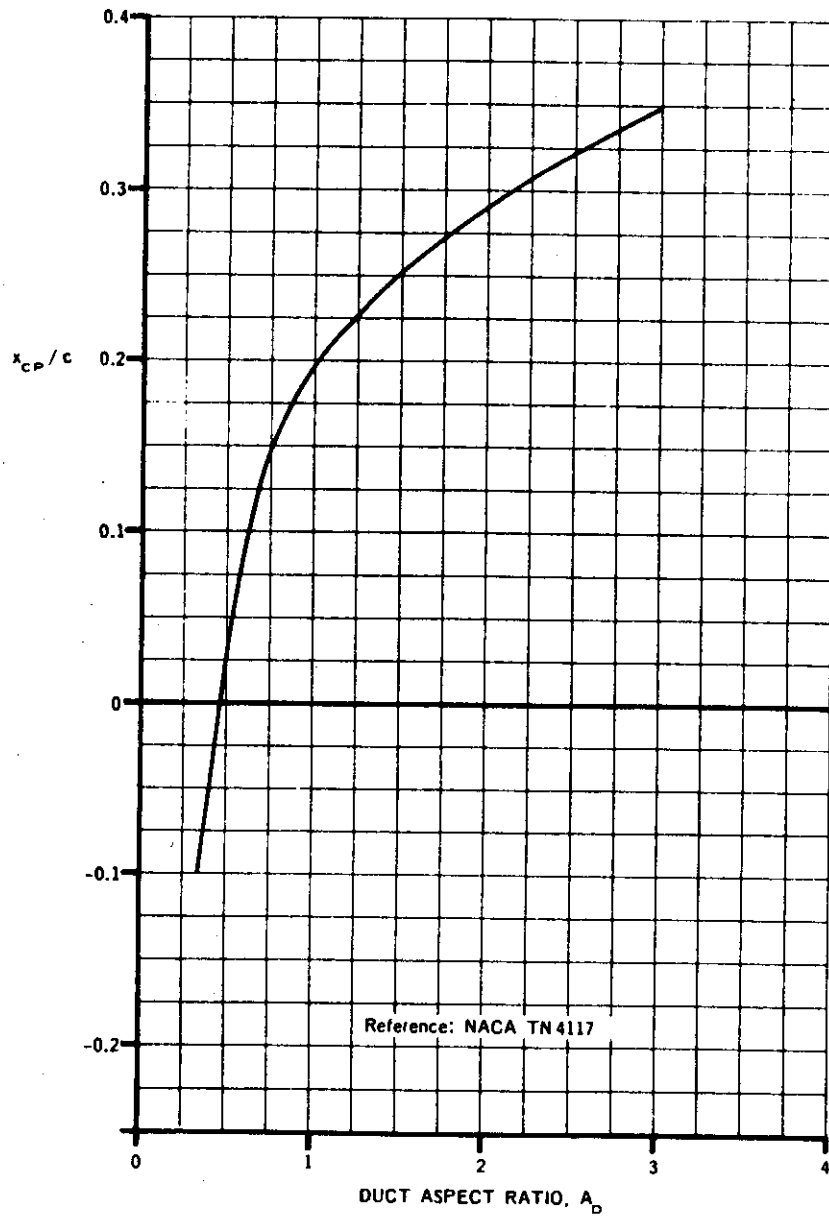


FIGURE 9.3.2-6 DUCT CENTER OF PRESSURE LOCATION

9.3.3 DUCTED-PROPELLER DRAG VARIATION WITH POWER AND ANGLE OF ATTACK

This Section presents a method for estimating ducted-propeller drag as a function of power and angle of attack. The basic discussion in Section 9.3.1 is directly applicable to this Section, and the reader is referred to that discussion for a general description of the fundamental phenomenon.

DATCOM METHOD

The method presented for estimating ducted-propeller drag is expressed as the sum of the components resulting from the internal and external mass flows. The theoretical basis of this method is the same as that of the Datcom lift-estimation method of Section 9.3.1.

The negative drag coefficient of a ducted propeller is given by

$$C_{F_x} = \frac{\pi A_D}{2} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] \left[\left(\frac{v_e}{v_\infty} \right)^2 \cos \delta_{i_f} - \left(\frac{v_e}{v_\infty} \right) \right] + C_{F_{x_e}} \quad 9.3.3-a$$

where the first term on the right-hand side is due to internal flow and is estimated on the basis of simple momentum theory modified by the empirical relation for the net internal-flow turning angle, discussed in Section 9.3.1.

$\frac{v_e}{v_\infty}$ is the exit-velocity ratio, obtained from equation 9.3.1-e

δ_{i_f} is the net turning angle of the internal flow, obtained from equation 9.3.1-c

$C_{F_{x_e}}$ is the external negative drag coefficient, resulting from the external flow, obtained from figure 9.3.3-4 as a function of duct aspect ratio and angle of attack. Figure 9.3.3-4 is based on empirical modifications of the data of references 1 and 2.

A comparison of test data with ducted-propeller drag coefficients computed by this method is shown in table 9.3.3-A. The measurement of drag involves the difference between the components of the thrust force and the normal force and is inherently less accurate than the measurement of the lift force. At a tunnel velocity near that for steady level flight ($C_{F_x} = 0$), slight errors in drag measurement can result in test values with an opposite sign than that predicted by theory; and percent error becomes incalculable, although the actual magnitude of the difference may be less than that for lift. Consequently, a comparison of theory and experiment in this area may be misleading when presented in terms of percent error. Therefore, a summary of the results presented in table 9.3.3-A is presented as a weighted error.

Sample Problem

Given: Same ducted-propeller configuration as sample problem of Section 9.3.1. Some of the characteristics are repeated below.

$$d_e = 4.525 \text{ ft}$$

$$d_{CB} = 1.208 \text{ ft}$$

$$c = 2.75 \text{ ft}$$

$$A_D = 1.645$$

$$S_D = 12.45 \text{ sq ft}$$

Additional Characteristics

$$V_{\infty} = 93.5 \text{ ft/sec}$$

Sea level

$$\alpha_D = 30^\circ$$

$$q_{\infty} = 10.4 \text{ lb/sq ft}$$

Compute:

$$\left. \begin{aligned} \frac{V_e}{V_{\infty}} &= 2.02 \\ \delta_{1_f} &= 27.45^\circ \end{aligned} \right\} \text{ (sample problem Section 9.3.1)}$$

$$\left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] = 0.9295$$

$$C_{F_{x_e}} = -0.395 \text{ (figure 9.3.3-4)}$$

Solution:

$$\begin{aligned} C_{F_x} &= \frac{\pi A_D}{2} \left[1 - \left(\frac{d_{CB}}{d_e} \right)^2 \right] \left[\left(\frac{V_e}{V_{\infty}} \right)^2 \cos \delta_{1_f} - \left(\frac{V_e}{V_{\infty}} \right) \right] + C_{F_{x_e}} \quad \text{(equation 9.3.3-a)} \\ &= \frac{\pi(1.645)}{2} (0.9295) \left[(2.02)^2 (0.8874) - (2.02) \right] + (-0.395) \\ &= (2.41)(1.60) - 0.395 \\ &= (3.455) \end{aligned}$$

C_{F_x} corresponds to an experimental value of 3.785 obtained from reference 1.

REFERENCES

1. Mort, K. W., and Yaggy, P. F.: Aerodynamic Characteristics of a Four-Foot Diameter Ducted Fan Mounted on the Tip of a Semi-Span Wing. NASA TN D-1301, 1962. (U)
2. Fletcher, H. S.: Experimental Investigation of Lift, Drag, and Pitching Moment of Five Annular Airfoils. NACA TN 4117, 1957. (U)

TABLE 9.3.3-A^a
DATA SUMMARY AND SUBSTANTIATION
DUCTED-PROPELLER DRAG COEFFICIENT

Ref ^b	α_D deg	J	$\frac{V_e}{V_\infty}$	C_{F_x} Calc	C_{F_x} Test	e % Error	Ref ^b	α_D deg	J	$\frac{V_e}{V_\infty}$	C_{F_x} Calc	C_{F_x} Test	e % Error
1 ^c	15	0.62	1.21	0.38	0.40	-5.0	4	60	0.40	2.80	1.98	1.02	94.1
		0.48	1.52	1.61	1.70	-5.3			75	0.20	5.59	5.89	2.40
	30	0.62	1.21	-0.135	0.10	-	90	0.30	3.72	0.435	-0.63	-	
		0.48	1.52	0.915	1.30	-29.6		0.40	2.80	-1.205	-2.22	-45.7	
		0.35	2.02	3.46	3.80	-9.1		0.20	5.57	-6.22	-12.34	-49.6	
		0.28	2.49	6.79	7.50	-10.6		0.30	3.72	-4.82	-7.91	-29.1	
	45	0.48	1.52	-0.01	0.20	-	20	0.40	2.80	-4.08	-6.35	-35.7	
		0.35	2.02	1.91	2.10	-9.0		0.39	2.26	7.79	6.70	16.3	
		0.28	2.49	4.49	5.30	-15.3		0.292	2.86	15.17	13.50	12.4	
		0.22	3.13	9.22	11.20	-17.7		0.25	3.25	20.76	19.09	8.7	
	60	0.42	1.70	-0.724	-0.50	44.8	30	0.39	2.26	6.69	4.66	43.6	
		0.28	2.49	1.69	1.40	20.7		0.292	2.86	13.19	10.80	22.1	
		0.22	3.13	4.75	5.90	-19.5		0.25	3.25	18.53	15.30	21.1	
		0.17	4.03	10.72	10.40	3.1		20	0.39	2.37	8.20	5.87	39.7
	75	0.35	2.02	-1.90	-2.40	-20.8	40	0.292	2.96	15.01	12.10	24.0	
		0.22	3.13	-0.237	-0.60	-60.5		0.25	3.33	20.23	16.94	19.4	
		0.22	3.13	-4.60	-7.30	-37.0		0.39	2.37	7.05	4.38	61.0	
		3	0.35	3.18	12.70	10.90		16.5	0.292	2.96	13.25	9.73	36.2
0.50	3.85		20.60	16.90	21.9	0.25	3.33	18.02	13.73	31.2			
0.70	2.11		3.80	2.69	41.3	0.39	2.37	5.58	2.70	106.7			
4	30	0.35	3.93	17.33	17.39	-0.3	45	0.242	2.96	10.96	7.03	55.9	
		0.50	2.80	7.18	6.94	3.5		0.25	3.33	15.11	8.66	74.5	
		0.70	1.99	2.42	2.63	-8.0		6	10	0.595	1.39	1.19	1.204
	0.25	5.55	30.2	28.65	5.4	15				1.05	1.126	-6.7	
	0.35	3.93	12.86	12.50	2.9	20				0.87	1.00	-13.0	
	60	0.50	2.80	4.84	4.58	5.7	30			0.43	0.704	39.8	
0.20		5.59	19.14	18.36	4.2	40			-0.90	0.188	-		
0.30		3.72	6.04	5.19	16.4	45			-0.37	-0.303	18.2		

$$\text{Weighted error} = \frac{\sum (|e| |C_{F_x \text{ Test}}|)}{\sum |C_{F_x \text{ Test}}|} = 21.8\%$$

- a Refer to Table 9.3.1-A for additional characteristics
- b These references are found in Section 9.3.1
- c Test results contain wing-duct interference effects

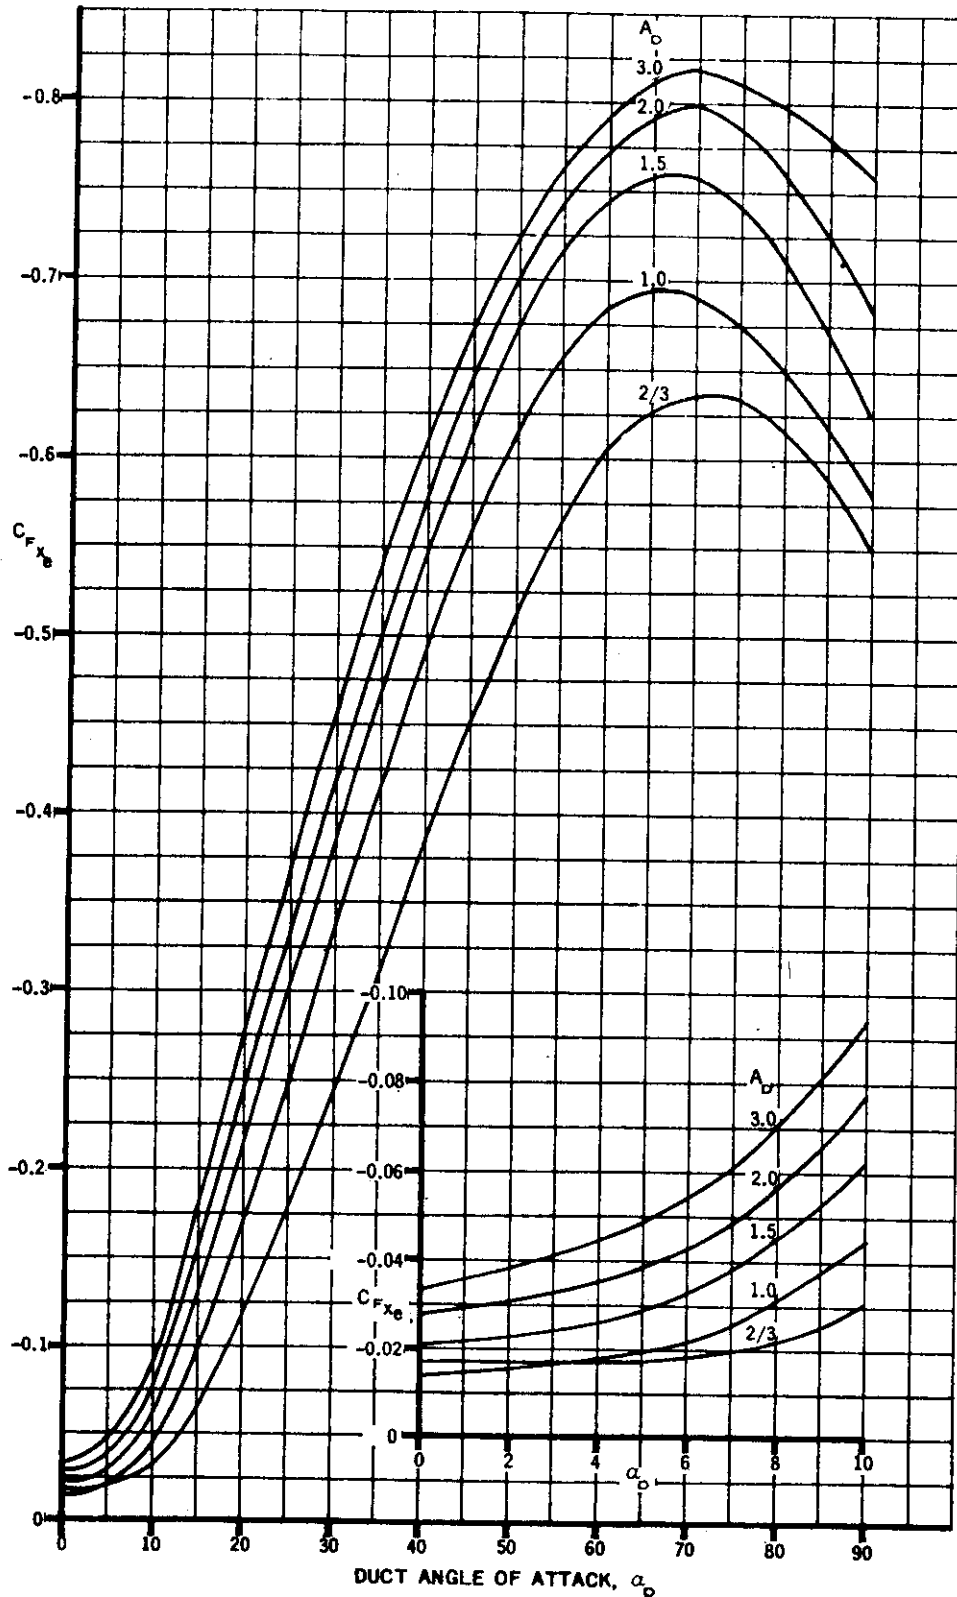


FIGURE 9.3.3-4 EXTERNAL MASS FLOW NEGATIVE DRAG COEFFICIENT